
Model：D4021-101/201/301

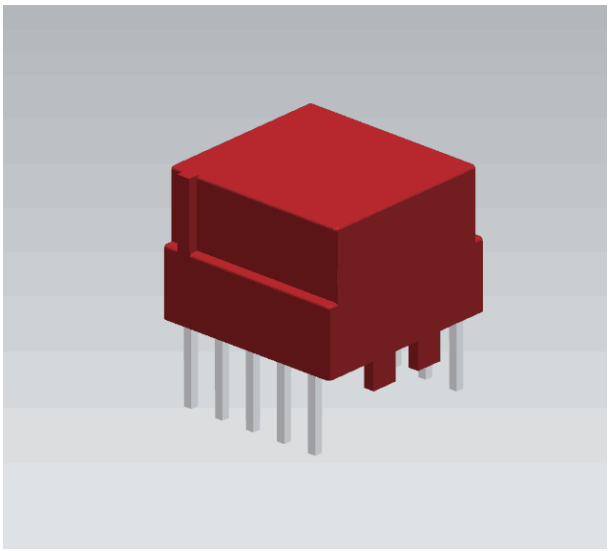

characteristics:

Applicable for circuit of triggering pulse train

Technical indicators:

Installation method：PCB

Flame resistance：UL94-V0

Operating temperature：-40℃～+85℃

Storage temperature：：-40℃～+85℃


Frequency range：40KHz～200KHz

Dielectric strength：3.1KV 50Hz 2s

Electrical parameters:


Vout microsecond integral	120	μvs
Pulse width (D=1:2)	8/6/4	μs
Ratio	1:1/2:1/3:1	
Input amplitude	15/20/30	V
Output amplitude	≥13/≥8.8/≥8.8	V
Load impedance	100	Ω
Leading edge time	≤0.1/≤0.2/≤0.2	μs
Main circuit operating voltage	380	V
Weight		g

Connection diagram:

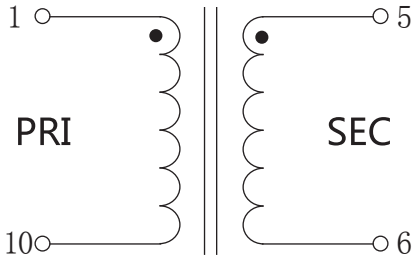


pin 4,7 are null.

Dimensions（in mm）：

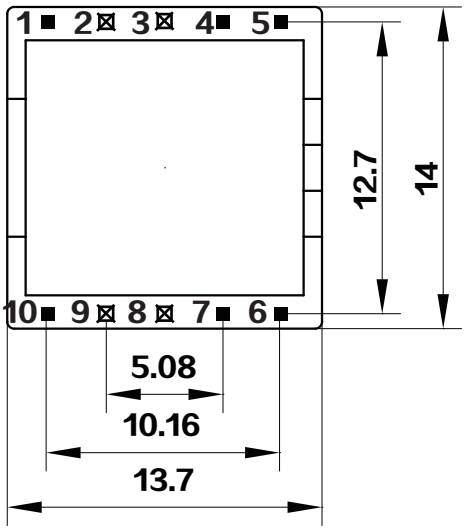

Front View

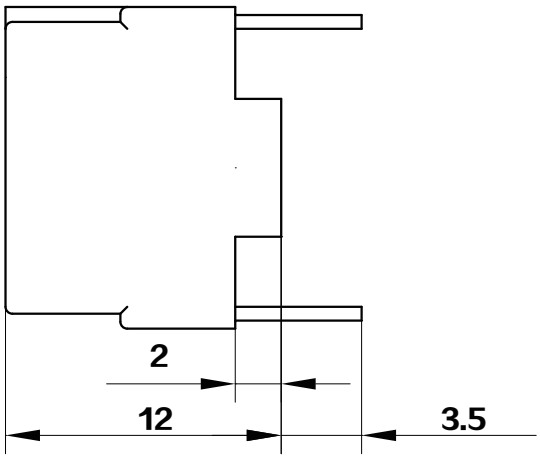

Bottom View