Model:D4185-101

characteristics:

It is used to drive IGBT,MOS pipe and transmit high-frequency signal isolation.




Technical indicators:

Installation method：PCB
Flame resistance：UL94-V0
Operating temperature：-40℃～+85℃
Storage temperature：：-50℃～+90℃
Frequency range：1KHz～100KHz
Dielectric strength：4.5KV 50Hz 1min


Electrical parameters:

Vout microsecond integral	1000	μvs
Pulse width (D=1:2)	66.6	μs
Ratio	1:1	
Input amplitude	15	V
Output amplitude	12	V
Load impedance	7	Ω
Leading edge time	≤1	μs
Main circuit operating voltage	380	V
Weight		g


Connection diagram:

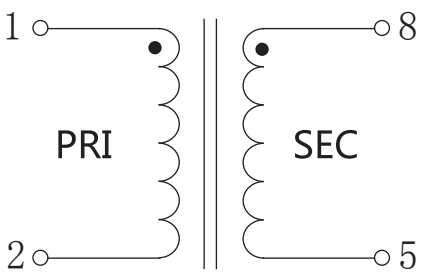

Dimensions（in mm）：

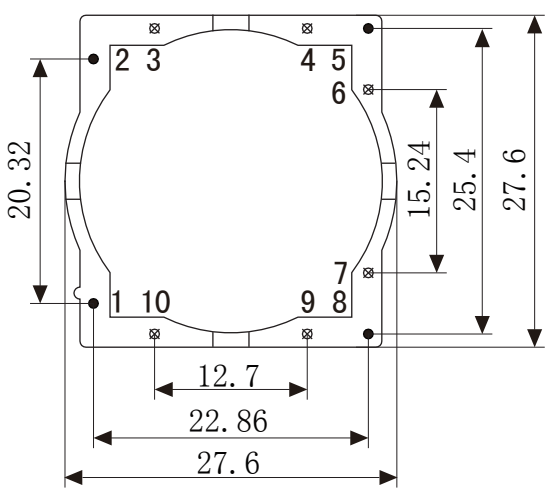

Bottom View

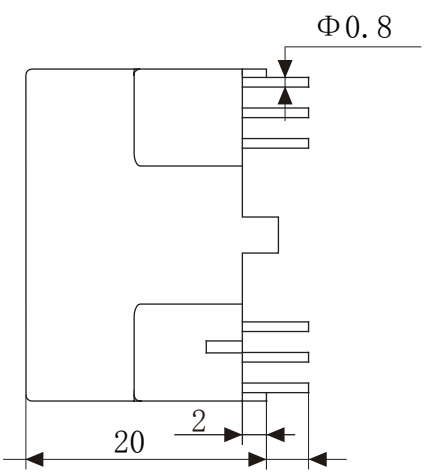

Side View