

Model:D4185-111

characteristics:

It is used to drive IGBT,MOS pipe and transmit high-frequency signal isolation.

Technical indicators:


- Installation method: PCB
- Flame resistance: UL94-V0
- Operating temperature: -40℃~+85℃
- Storage temperature: : -50℃~+90℃
- Frequency range: 1KHz~100KHz
- Dielectric strength: 4.5KV 50Hz 1min




Electrical parameters:

Vout microsecond integral	1000	μvs
Pulse width (D=1:2)	66.6	μs
Ratio	1:1:1	
Input amplitude	15	V
Output amplitude	12	V
Load impedance	100	Ω
Leading edge time	≤1	μs
Main circuit operating voltage	380	V
Weight		g


Connection diagram:

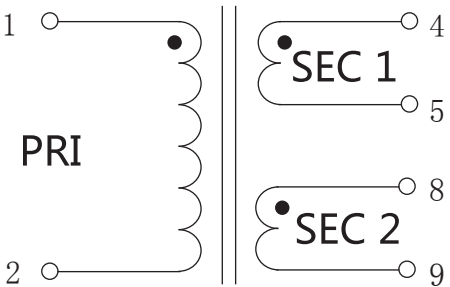

Dimensions (in mm) :

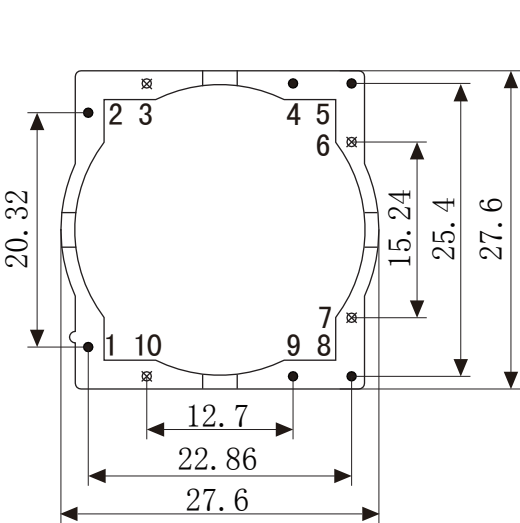

Bottom View

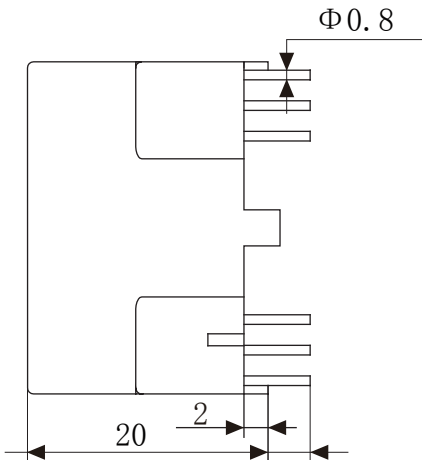

Side View