New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960


Silicon

Complementary Unijunction Transistor

D5K2

absolute maximum ratings: (25° C free air)

	D5K2	
Voltage		
Interbase Voltage	20	V
Current		
Average Emitter (Forward)	150	mA
Peak Emitter (Forward) (Note 1)	2	A
Peak Reverse Emitter	15	mA
Power		
Average Total	200	mW
Temperature		
Operating	−55 to +100	°C
Storage	−55 to +150	°C

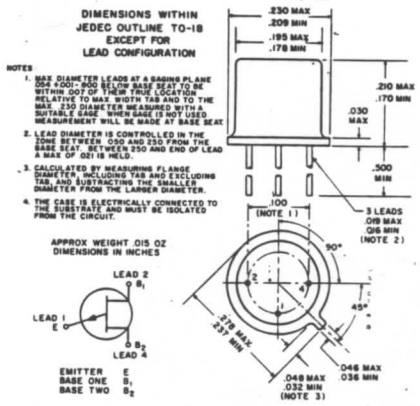

electrical characteristics: (25° C free air)

		Min.	Typ.	Max.	
Intrinsic Standoff Ratio	η	0.58	0.60	0.62	
Peak Point Voltage					
(V_{BB} = 5V)	V_P	3.2	3.45	3.7	Volts
(V_{BB} = 10V)	V_P	6.1	6.45	6.8	Volts
Interbase Resistance					
(I_{BB} = 0.1mA)	R_{BBO}	5	8	15	kohms
Emitter Breakdown Voltage					
(I_{EB1} = 10μA)	V_{EB1O}	8.0	9.5		Volts
Peak Point Current					
(V_{BB} = 10V)	I_P			15	μA
Valley Point Current					
(V_{BB} = 10V)	I_V	1	2		mA
Emitter Reverse Current					
(V_{EB1} = 5V)	I_{EB1O}		0.1	10	nA
Emitter Saturation Voltage					
(I_E = 50mA, V_{BB} = 10V)	$V_{E(sat)}$		1.1	1.5	Volts
Modulated Interbase Current					
(I_E = 50mA, V_{BB} = 10V)	$I_{B2(mod)}$		4	10	mA
Peak Pulse Voltage					
(Note 4)	V_{OUT}	3.5	4.5		Volts
Diode Voltage Drop					
(Note 3)	V_D	.30	.45	.60	Volts
Minimum Charge to Trigger					
(V_{BB} = 10V)	Q_t		50		pC
Turn-on Time (See Figure 7)	t_{on}			1	μsec.
Recovery Time (See Figure 7)	t_{rec}			10	μsec.
Relaxation Oscillator Frequency Shift from 25°C Value (See Figure 1, C = 0.1μF, R_{B2} = 1kΩ, V_S = 12.5V)					
−15°C to +65°C			0.3	1.0	%
−55°C to +100°C			0.5	2.0	%

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors