



Multi DomiLED™

Synonymous with function and performance, the Multi DomiLED™ series is perfectly suited for a variety of cross-industrial applications due to its small package outline, durability and superior brightness.



Features:

- > High brightness tri-color surface mount LED.
- > Each color can be individually controlled
- > 120° viewing angle.
- > Small package outline (LxWxH) of 3.2 x 3.0 x 1.7mm.
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > Compliance to automotive standard; AEC-Q101



Applications:

- > Automotive: Interior applications, eg: switches, telematics, climate control system, dashboard, etc.
- > Automotive: Exterior applications, eg: signal lighting, Center High Mounted Stop Light (CHMSL)
- > Signs: full color video
- > Consumer & Communication: backlighting of LCDs
- > General Lighting: architectural lighting, decorative lighting

Optical Characteristics at Tj=25°C

Part Ordering Number	Color, λ_{dom} (nm)			Luminous Intensity @ If = 20mA IV (mcd)								
	Chip #1	Chip #2	Chip #3	Chip #1			Chip #2			Chip #3		
				Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
D6RTB-PJG-UV+WX+ST-1	Red	True Green	Blue	715.0	1000.0	1400.0	1260.0	1764.0	2470.0	212.0	300.0	420.0
	625nm	525nm	470nm									

NOTE:

1. Reel comes in a quantity of 1000 units per reel.
2. Luminous intensity is measured with an accuracy of $\pm 11\%$.
3. All electrical and optical data are measured at room temperature; Ta = 25°C.

Electrical Characteristics at Tj=25°C

	Vf @ If = 20mA		
	Min. (V)	Typ. (V)	Max. (V)
Red	1.90	2.10	2.50
True Green	2.80	3.10	3.40
Blue	2.80	3.10	3.40

Forward voltage, Vf is measured with an accuracy of ± 0.1 V.

Absolute Maximum Ratings

	Maximum Value	Unit
DC forward current	Red; AlInGaP=50; True Green, Blue; InGaN=50	mA
Peak pulse current; (tp $\leq 10\mu$ s, Duty cycle = 0.005)	Red ; AlInGaP=500; True Green, Blue; InGaN=200	mA
Reverse voltage	Red; AlInGaP=12; True Green, Blue; InGaN= Not Designed For Reverse Bias	V
ESD threshold (HBM)	2000	V
LED junction temperature	125	°C
Operating temperature	-40 ... +100	°C
Storage temperature	-40 ... +100	°C
Thermal resistance junction/ambient (3 chips on)		
Red, R _{th JA}	440	K/W
Blue & True Green, R _{th JA}	320	K/W
Thermal resistance junction/solder (3 chips on), R _{th JS}	180	K/W

Characteristics

	Symbol		Value	Unit
Temperature coefficient of λ_{dom} (typ) $I_F = 20\text{mA}; 0\text{ }^{\circ}\text{C} \leq T \leq 100\text{ }^{\circ}\text{C}$	$TC_{\lambda_{dom}}$	Red	0.06	nm / K
		True Green	0.02	nm / K
		Blue	0.02	nm / K
Temperature coefficient of V_F (typ) $I_F = 20\text{mA}; 0\text{ }^{\circ}\text{C} \leq T \leq 100\text{ }^{\circ}\text{C}$	TC_V	Red	-3.6	mV / K
		True Green	-3.0	mV / K
		Blue	-2.4	mV / K
Temperature coefficient of I_V (typ) $I_F = 20\text{mA}; 0\text{ }^{\circ}\text{C} \leq T \leq 100\text{ }^{\circ}\text{C}$	TC_{I_V}	Red	-0.53	% / K
		True Green	-0.04	% / K
		Blue	0.02	% / K

Wavelength Grouping

Color	Group	Wavelength distribution (nm)
Red	Full	620 - 630
True Green	Full	521 - 536
	A	521 - 526
	B	526 - 531
	C	531 - 536
Blue	Full	465 - 475
	A	465 - 470
	B	470 - 475

Dominant wavelength is measured with an accuracy of $\pm 1\text{nm}$.

Luminous Intensity Group at Tj=25°C

Only one IV group is allowed for each chip within reel.

Brightness Group	Luminous Intensity IV (mcd)		
	Chip #1	Chip #2	Chip #3
U3W3S3	715.0...1000.0	1260.0...1764.0	212.0...300.0
U3W3T3	715.0...1000.0	1260.0...1764.0	300.0...420.0
U3X3S3	715.0...1000.0	1764.0...2470.0	212.0...300.0
U3X3T3	715.0...1000.0	1764.0...2470.0	300.0...420.0
V3W3S3	1000.0...1400.0	1260.0...1764.0	212.0...300.0
V3W3T3	1000.0...1400.0	1260.0...1764.0	300.0...420.0
V3X3S3	1000.0...1400.0	1764.0...2470.0	212.0...300.0
V3X3T3	1000.0...1400.0	1764.0...2470.0	300.0...420.0


Luminous intensity is measured with an accuracy of $\pm 11\%$.

Correlation Between Luminous Intensity And Luminous Flux


Color	IV Bin	Luminous Intensity (mcd)		Correlated Luminous Flux (lm)	
		Min	Max	Min	Max
Red	U3	715	1000	1.79	2.50
	V3	1000	1400	2.50	3.50
True Green	W3	1260	1764	3.15	4.41
	X3	1764	2470	4.41	6.18
Blue	S3	212	300	0.53	0.75
	T3	300	420	0.75	1.05

Dominant wavelength is measured with an accuracy of $\pm 1\text{nm}$.


Relative Intensity Vs Forward Current (Red)

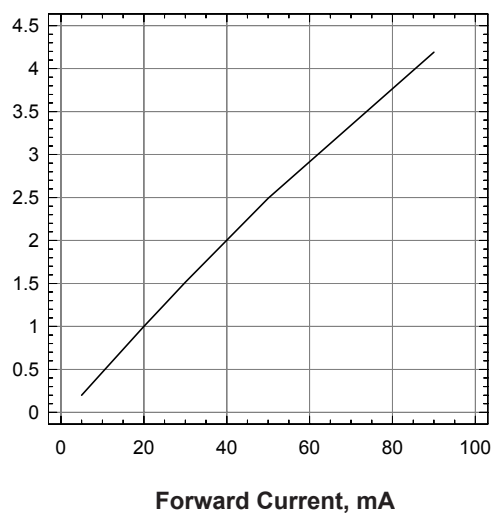


Relative Intensity Vs Forward Current (Blue and True Green)

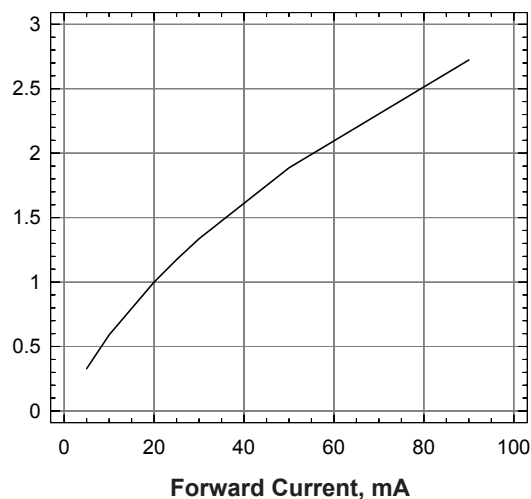


Forward Current Vs Forward Voltage (Red)

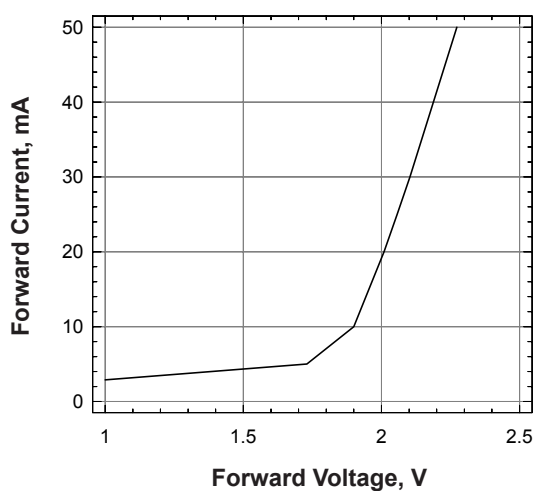


Forward Current Vs Forward Voltage (Blue and True Green)

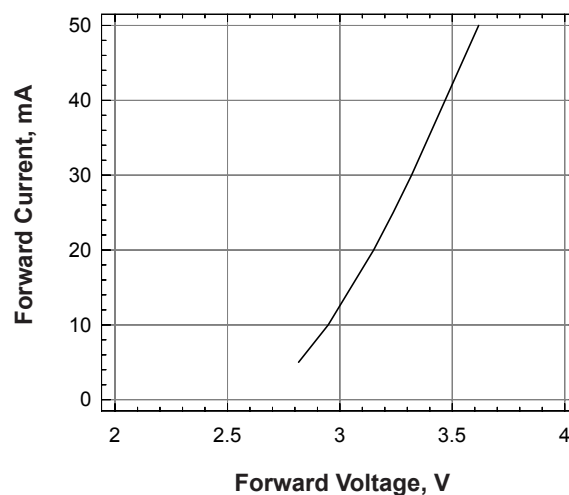


Wavelength Shift Vs Forward Current (Blue)

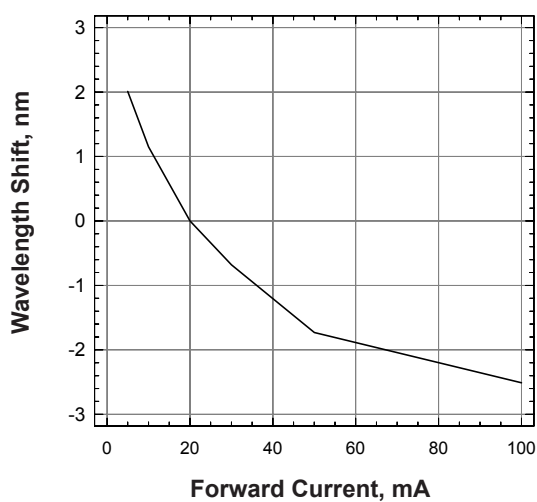


Wavelength Shift Vs Forward Current (True Green)

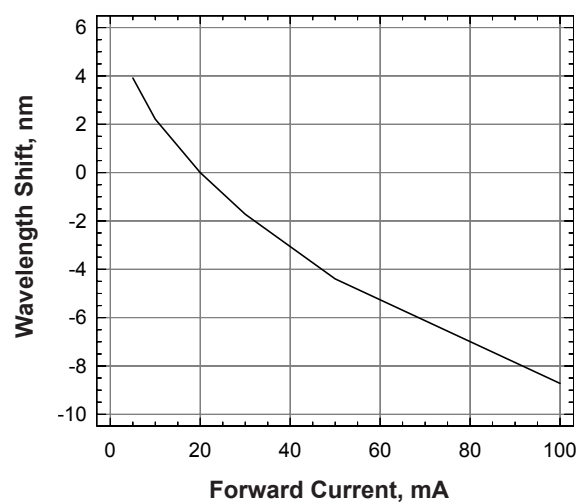


Relative Intensity vs Wavelength

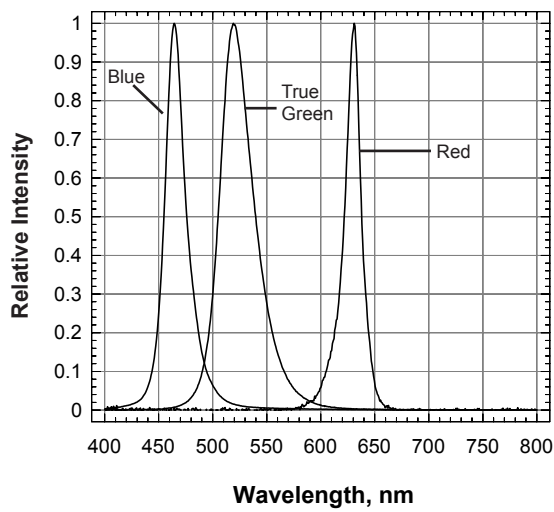


Maximum Permissible Forward Current (3 Chips on)

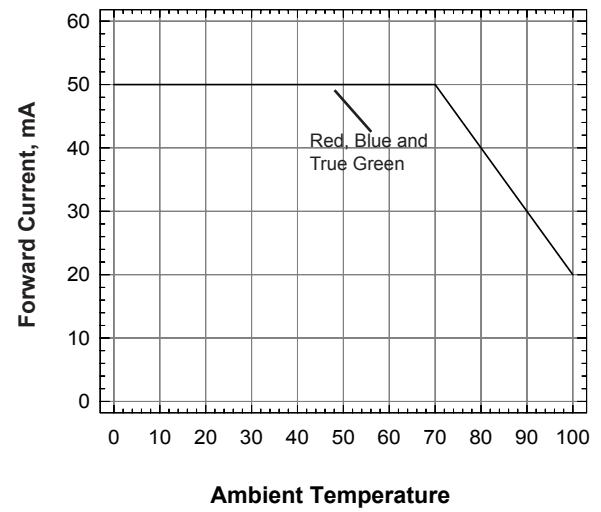


Allowable Forward Current Vs Duty Ratio
 (Tj=25 Deg C, tp<10uS)

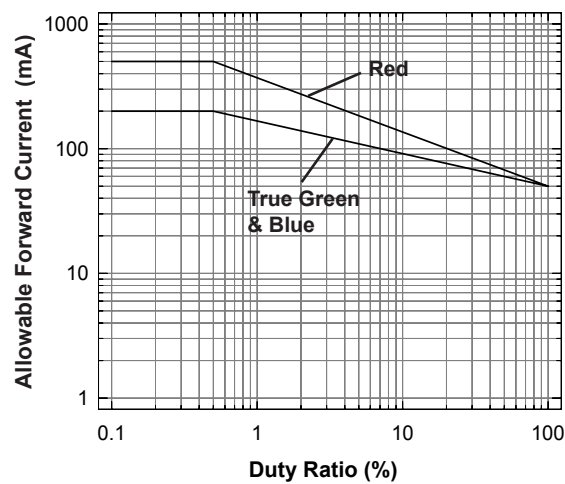

Radiation Pattern

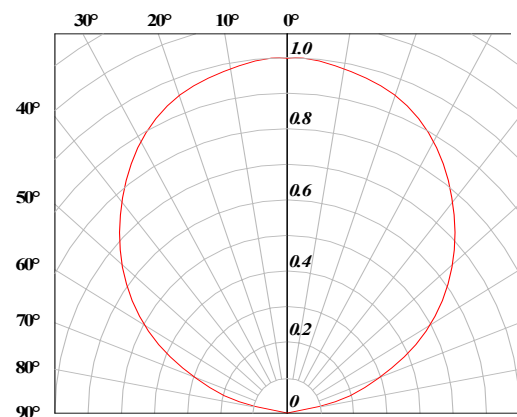

Multi DomiLED™ : D6RTB-PJG Package Outlines

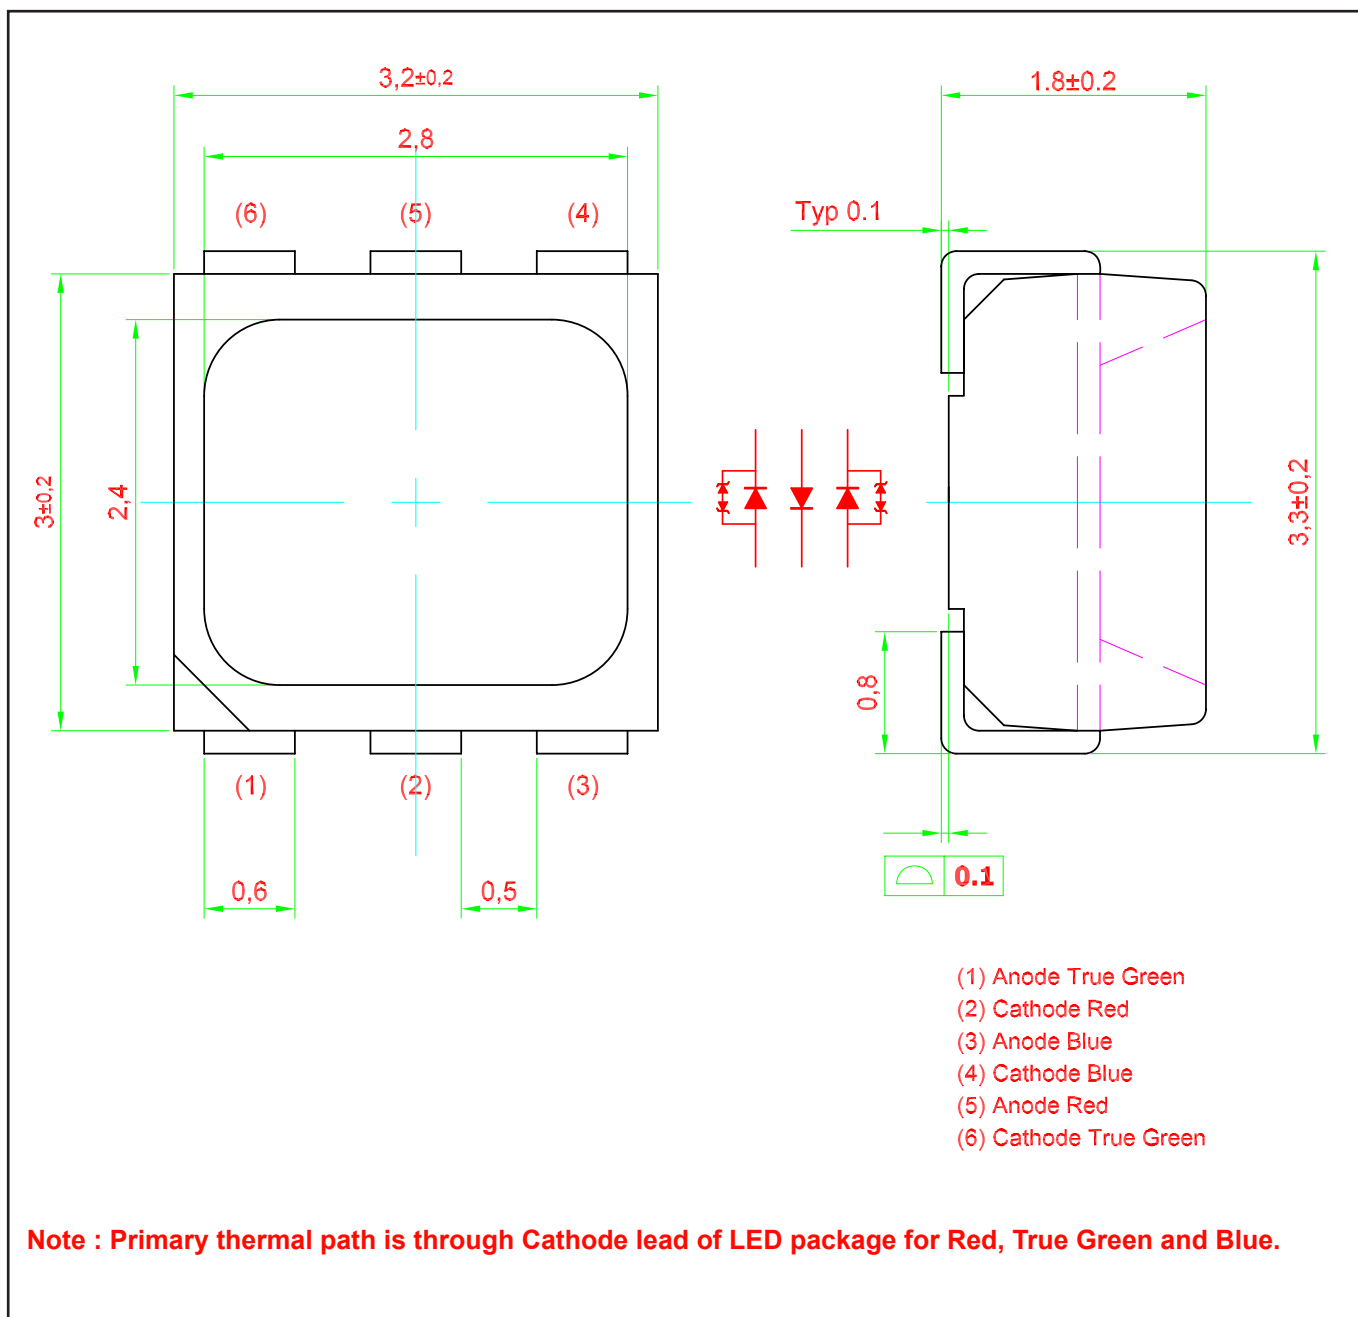


Materials

Materials	
Lead Frame	Copper alloy
Housing	High temperature resistant plastic, PPA
Encapsulant	Silicone resin
Lead-finishing	Pure tin plating, Sn


Note: Package is Pb-free.

Recommended Solder Pad

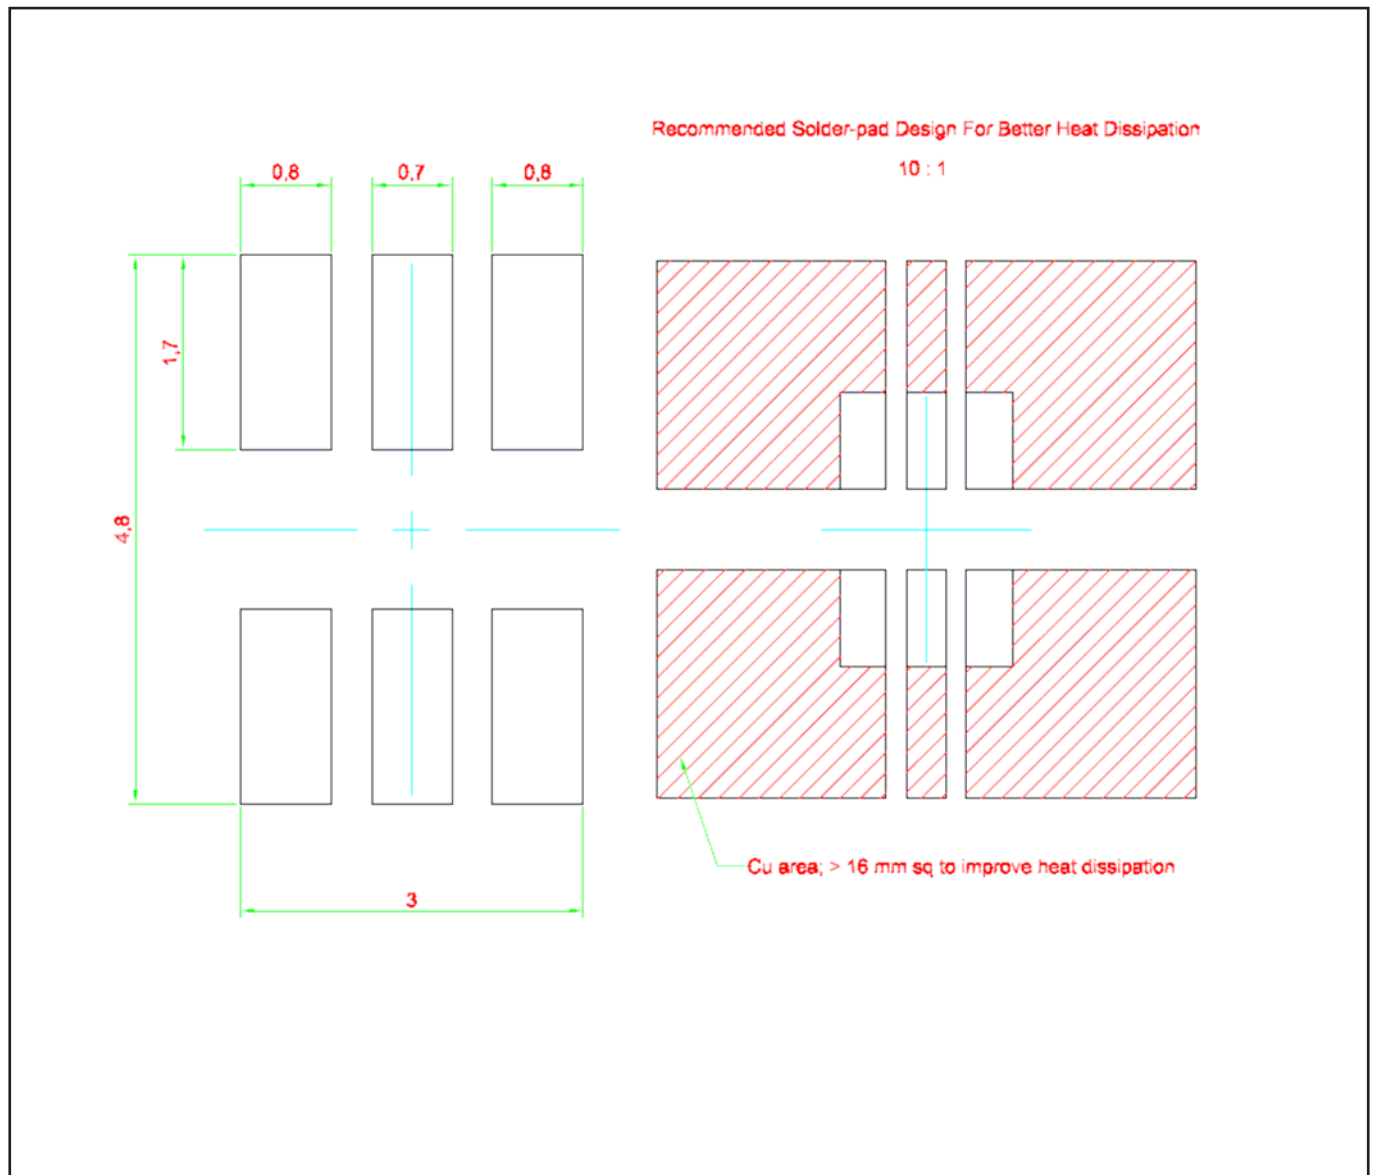


Taping and orientation


- Reels come in quantity of 1000 units.
- Reel diameter is 180 mm.

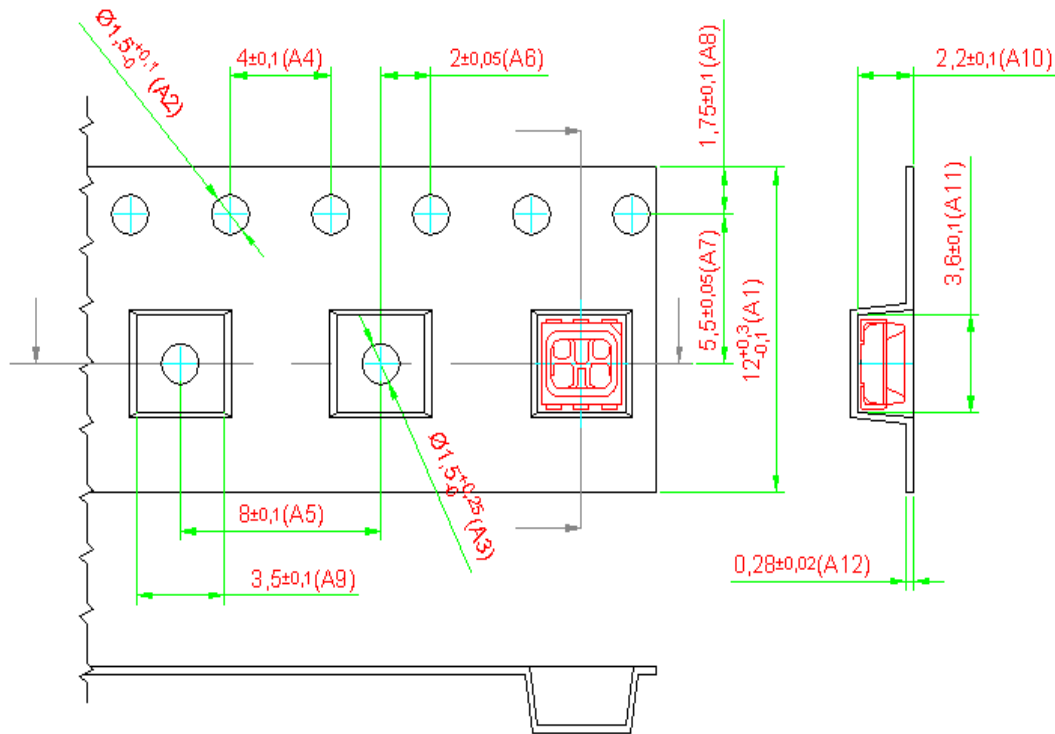

Packaging Specification

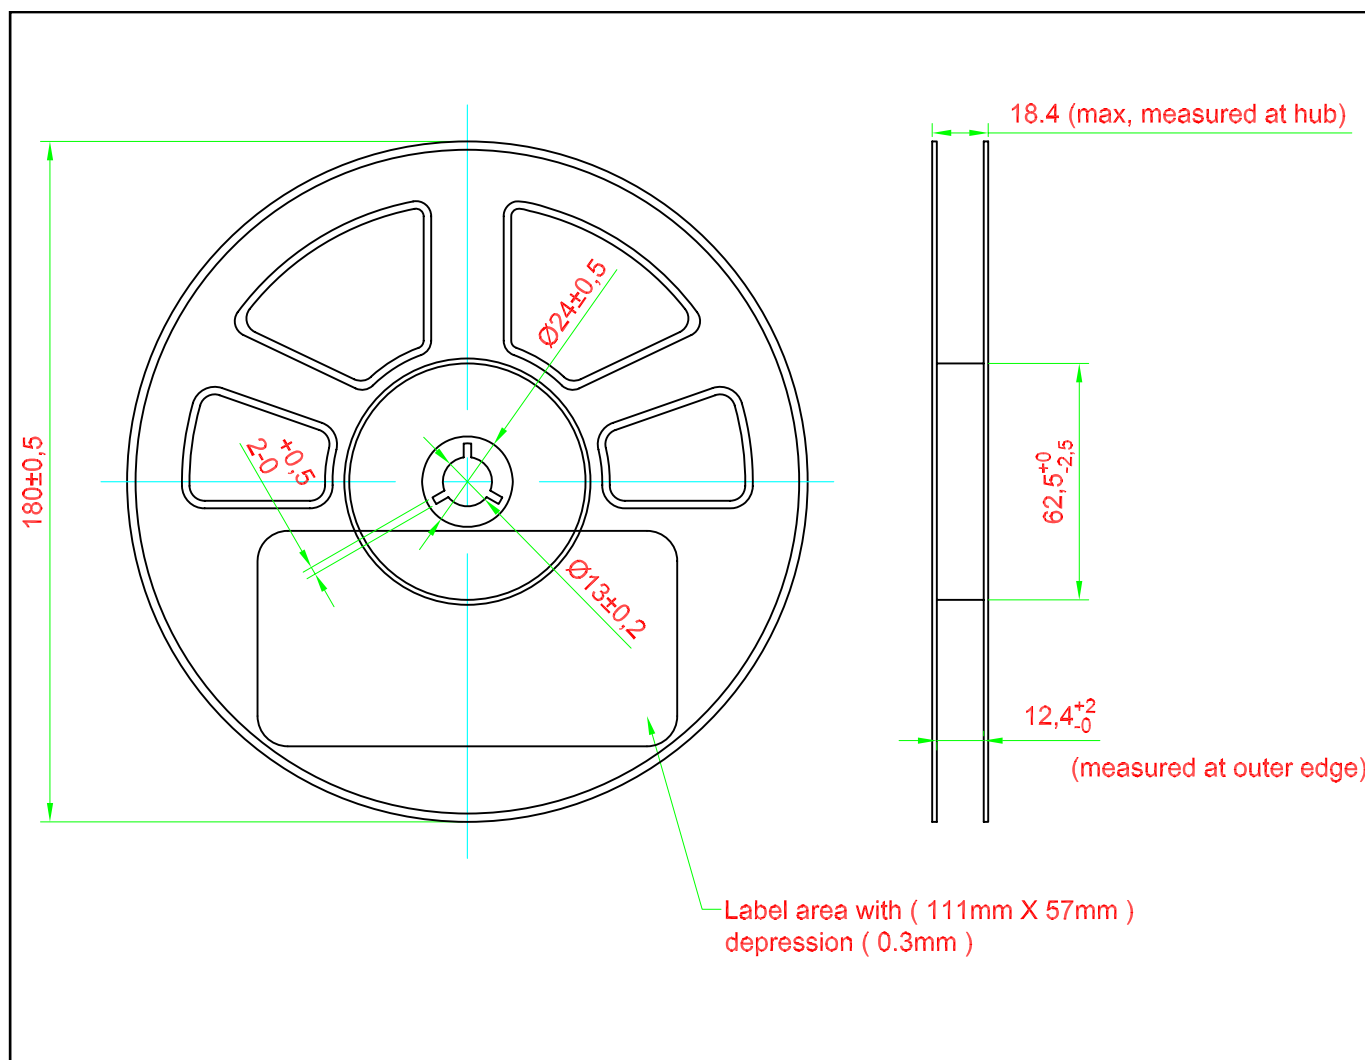

Packaging Specification

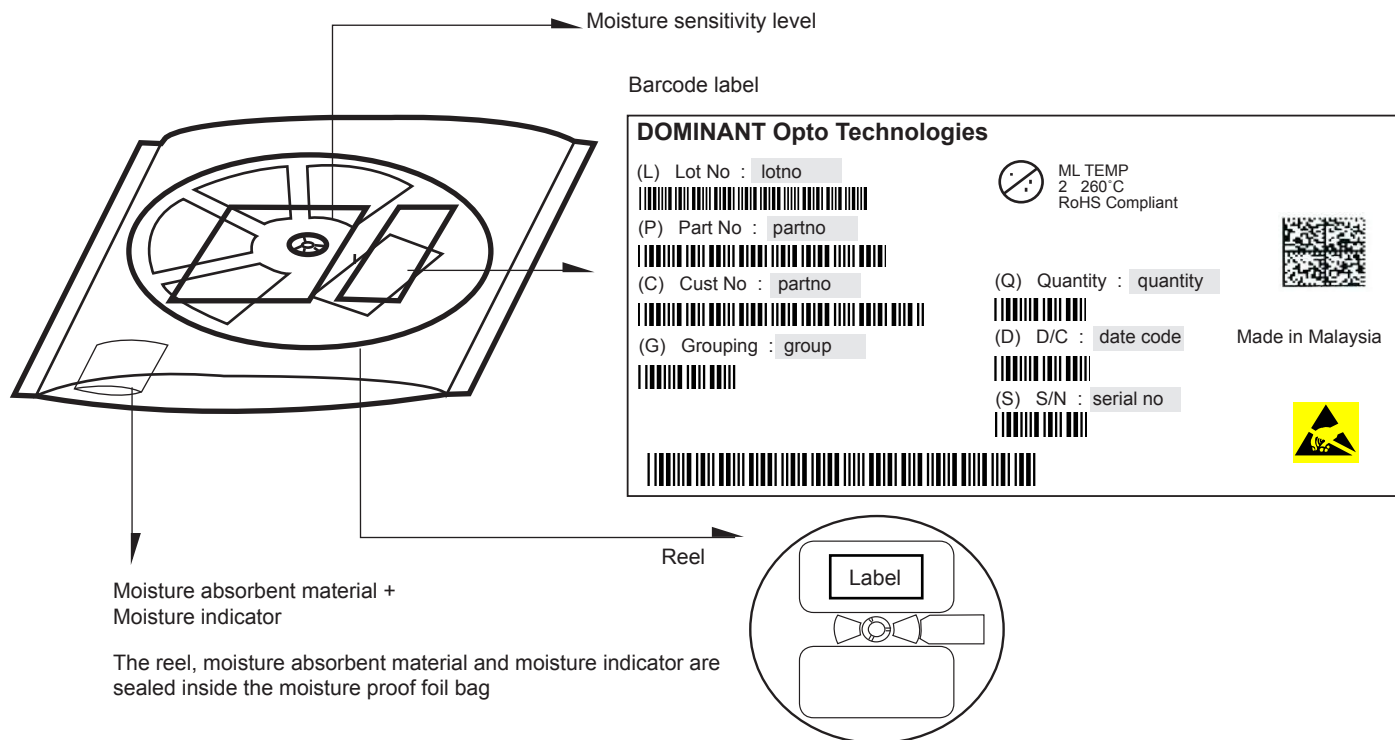


Average 1pc Multi DomiLED

1 completed bag (1000pcs)

Weight (gram)

0.034


240 ± 10

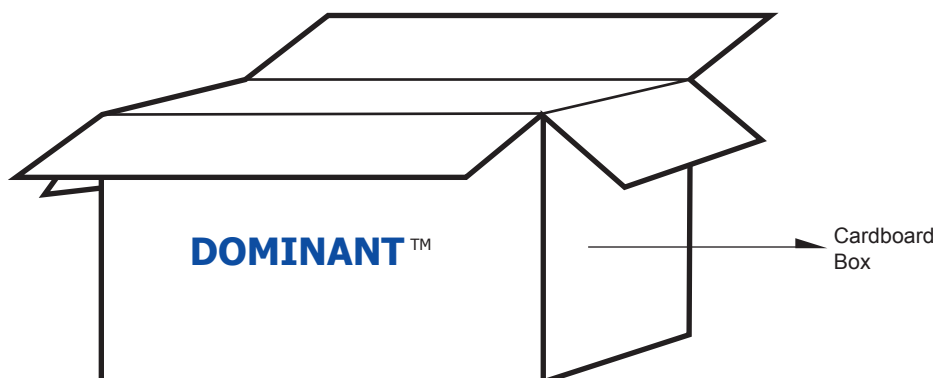

For Multi DomiLED™

Cardboard Box Size	Dimensions (mm)	Empty Box Weight (kg)	Reel / Box
Super Small	325 x 225 x 190	0.38	7 reels MAX
Small	325 x 225 x 280	0.54	11 reels MAX
Medium	570 x 440 x 230	1.46	48 reels MAX
Large	570 x 440 x 460	1.92	96 reels MAX

Recommended Pb-free Soldering Profile

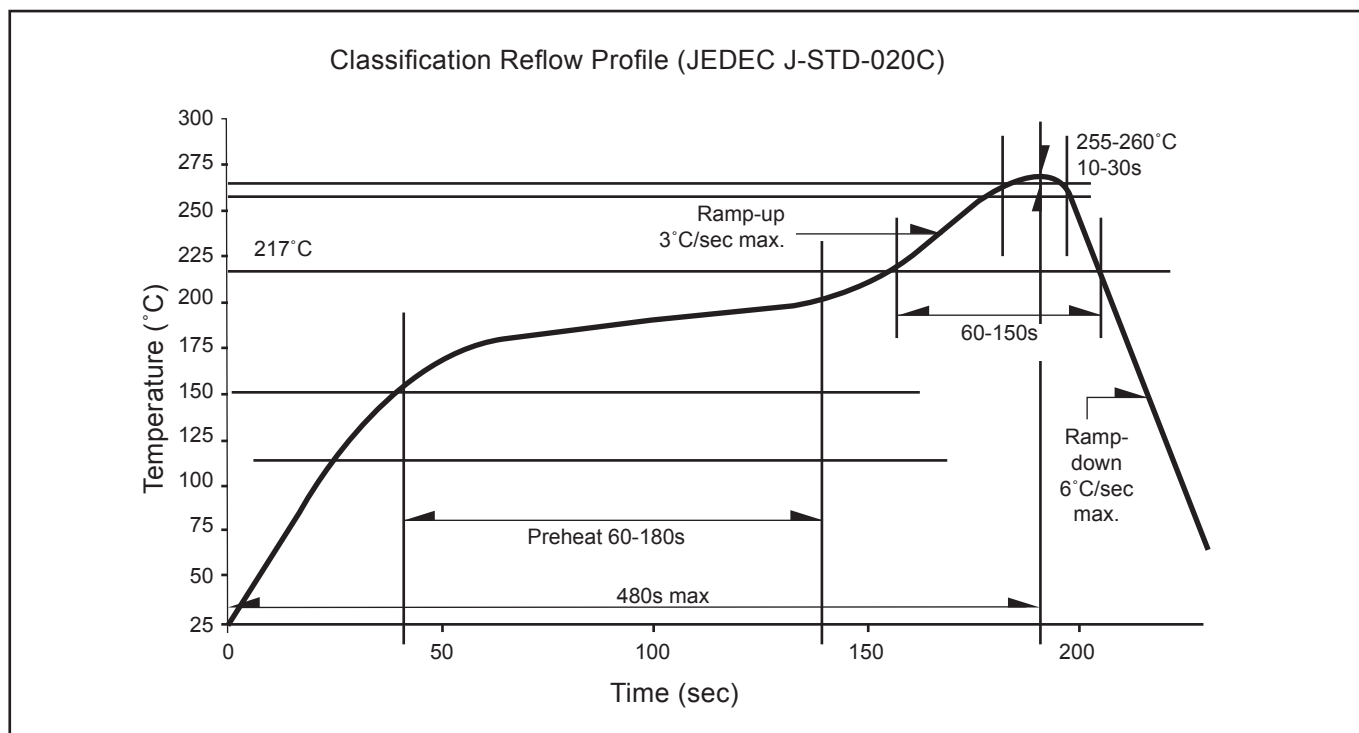

Revision History

Page	Subjects	Date of Modification
-	Initial release	22 May 2012
2	Update partno from D6RTB-PJG-UV+VW+ST-1 -> D6RTB-PJG-UV+WX+ST-1	10 Sep 2012
1	Update Applications	31 Oct 2012
2, 6	Update DC forward current to 50 Update Thermal Resistance / Ambient	30 Aug 2013
6	Update graph: Allowable Forward Current Vs Duty Ratio	21 Nov 2013
7	Update package outline	15 Jul 2014
1, 7, 9, 11	Add Features Update Packaging Outline Update Carrier Tape Update Packaging Specification	15 Mar 2016

NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

About Us

DOMINANT Opto Technologies is a dynamic Malaysian Corporation that is among the world's leading SMT LED Manufacturers. An excellence – driven organization, it offers a comprehensive product range for diverse industries and applications. Featuring an internationally certified quality assurance acclaim, DOMINANT's extra bright LEDs are perfectly suited for various lighting applications in the automotive, consumer and communications as well as industrial sectors. With extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing, research and testing capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies can be found on the Internet at <http://www.dominant-semi.com>.

Please contact us for more information:

DOMINANT Opto Technologies Sdn. Bhd.
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia
Tel: (606) 283 3566 Fax: (606) 283 0566
E-mail: sales@dominant-semi.com

