DB301S-DB307S

SURFACE MOUNT BRIDGE RECTIFIERS


Features

- Glass passivated die construction
- Low forward voltage drop
- High current capability
- High surge current capability
- Plastic material-UL flammability 94V-0

Mechanical Data

- Case: DB-S, molded plastic
- Terminals: plated leads solderable per MIL-STD-202, Method 208
- Polarity: as marked on case
- Mounting position: Any
- Marking: type number
- Lead Free: For RoHS / Lead Free Version,

DB-S

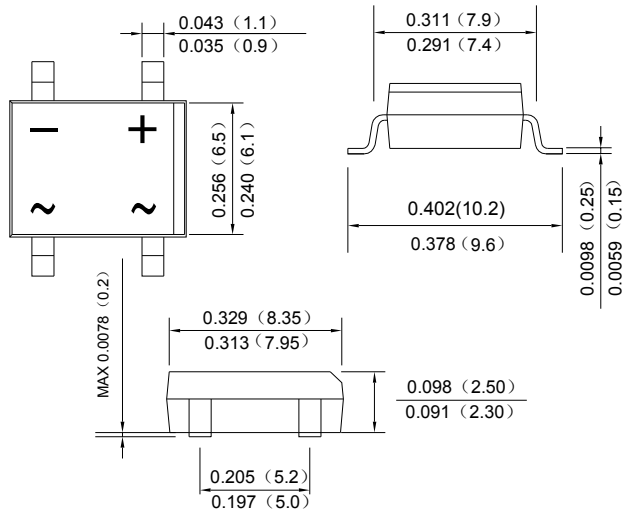

Dimiensions in inches and （milimeters）

Maximum Ratings and Electrical Characteristics

Rating at 25℃ ambient temperature unless otherwise specified.
Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	DB301S	DB302S	DB303S	DB304S	DB305S	DB306S	DB307S	UNITS
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_{DC}	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Average Rectified Output Current (Note 1)@T_A=40℃	I_O	3.0							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	80							A
Forward Voltage per element @IF=3.0A	V_{FM}	1.1							V
Peak Reverse Current @T_A=25℃ At Rated DC Blocking Voltage @T_A=125℃	I_R	5.0 500							uA
Typical Junction Capacitance per leg (Note 2)	C_J	25							pF
Typical Thermal Resistance per leg	$R_{\theta JA}$ $R_{\theta JL}$	40 15							℃/W
Operating and Storage Temperature Range	T_J,T_{STG}	-55to+150							℃

Note:1. Mounted on glass epoxy PC board with 1.3mm^2 solder pad.
2.Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

http://www.trr-jx.com Download from alldatasheet.com
广东钜兴电子科技有限公司
GUANGDONG JUXING ELECTRONICE TECHNOLOGY., LTD

Characteristic Curves (T_A=25 ℃ unless otherwise noted)

Fig. 1 Output Current Derating Curve

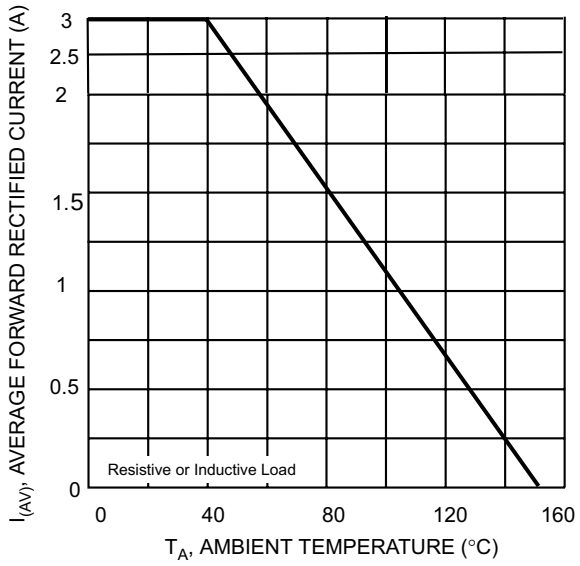


Fig. 2 Typical Forward Characteristics (per leg)

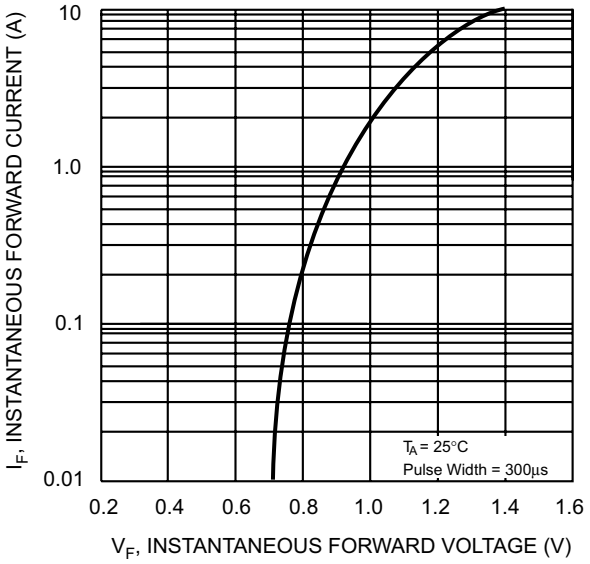


Fig. 3 Maximum Peak Forward Surge Current (per leg)


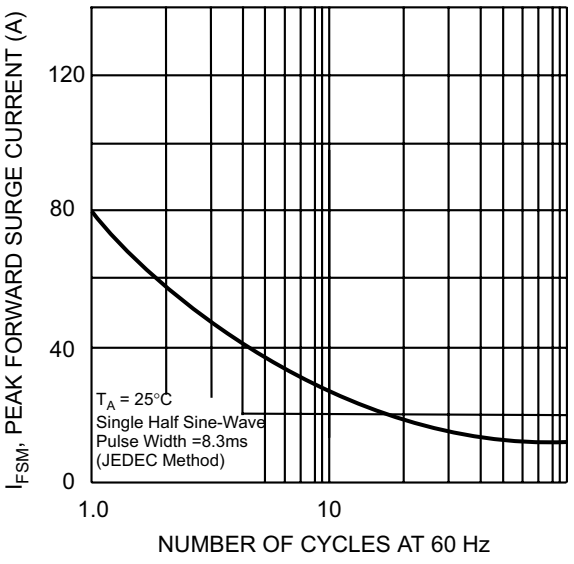


Fig. 4 T ypical Reverse Characteristics (per element)

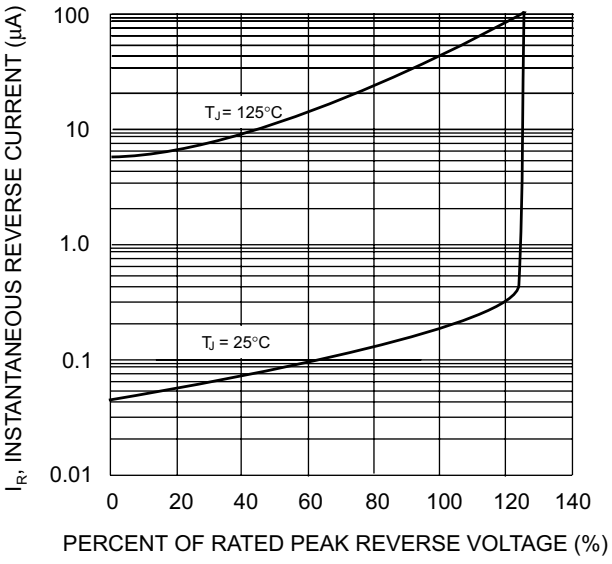

Download from alldatasheet.com