- 50 & 68 way
- Low Cost
- Selective Gold Plated Contacts
- 1.27mm Pitch



SPECIFICATION


Material

Insulator:	PBT & Glass fill reinforced UL94V-0
Pin Contacts:	Phosphor Bronze
	Gold Plated over nickel
Shell:	Zinc Alloy
	Nickel over copper plated

Electrical Data


Rated Current:	1 Amp
Insulation Resistance:	3000 MΩ min at 500v DC
Contact Resistance:	30mΩ Max
Dielectric withstanding voltage:	500vac/1min
Operating Temperature:	-55˚C -+ 105˚C

OUTLINE DRAWING

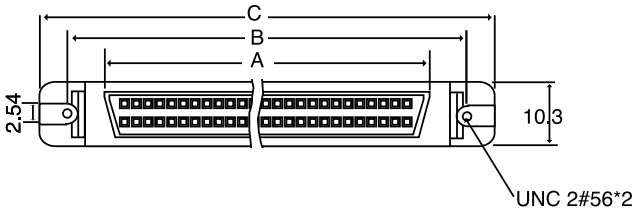

POSITION	A	B	C	D
50	30.50	46.50	52.65	40.10
68	41.93	57.93	64.80	51.53

Other No. of ways available upon request.

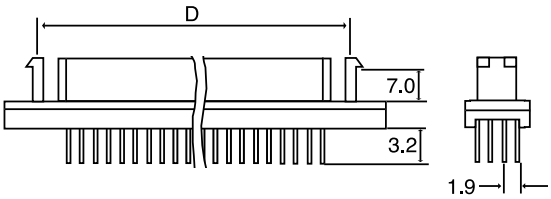

ORDERING INFORMATION

DBC	SC	F	SS	50	S	
Dubilier Connectors	Series	Contact Type	Contact Style	No of Ways	Contact Plating	Shell Option
	SC= SCII- II D sub	F= Female	SS= Solder Straight	50= 50way 68= 68way	S= Selective Plating	Blank= Metal Shell P= Plastic