

- 4 position dual port right angle socket
- Through hole
- Recommended PCB thickness of 1.57mm
- Contact plating 30 micro inches min

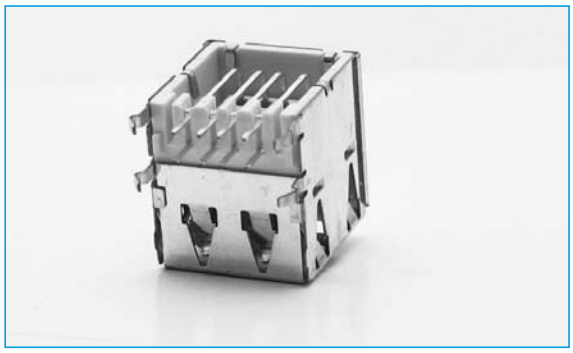

SPECIFICATION

Contact Resistance:	30mΩ Max
Insulation Resistance:	1000MΩ min. @500VDC
Rated Voltage and Current:	1.5A @250VAC min
Dielectric withstanding voltage:	500VAC (rms) for 1 minute
Durability:	1500 mating cycles
Insertion Force:	35 Newtons max
Extraction Force:	10 Newtons min
Housing:	PBT UL94V-0
Terminal:	Phosphor Bronze
Plating:	30 micro inches gold
Shell:	Brass

OUTLINE DRAWING

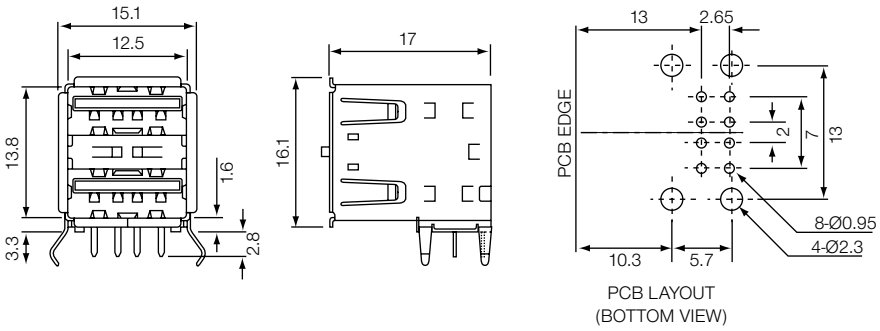

PCB LAYOUT
(BOTTOM VIEW)

ORDERING INFORMATION

DBC	USB	2	A	DP		B
Dubilier Connectors	USB	Version	Style	Ports DP = Dual Port	Mounting Option Blank = PCB Mount	Colour B = Black W = White

SECTION 19