

Soft Recovery Diode

DCA100AA50/60

$I_{F(AV)} = 100A$, $V_{RRM} = 600V$
 $t_{rr} = 220ns$, Softness=0.8


SanRex Soft Recovery Diode Module **DCA100AA** series is designed for applications requiring fast switching and soft recovery wave shape to reduce or eliminate the need for snubber components in the circuit. The modules are isolated for easy mounting with other components or a common heatsink.

Features

- * Very Fast Reverse Recovery Time
- * Soft Recovery Characteristics
- * Low Forward Voltage Drop
- * UL registered E76102

Typical Applications

- * Welding and Plasma Cutting Machines
- * DC chopper
- * Rectifier in Switch Mode Power Supplies (SMPS)
- * Uninterruptible Power Supplies (UPS)
- * Free Wheeling Diode in converters and motor control circuits



Isolated TO-240 Package



Internal schematic diagram

< Maximum Ratings >

$T_j = 25^\circ C$ (unless otherwise noted) per diode


Symbol	Item		Ratings		Unit
			DCA100AA50	DCA100AA60	
V _{RRM}	Repetitive Peak Reverse Voltage		500	600	V
V _{R(DC)}	Reverse D.C. Voltage		400	480	V

I _{F(AV)}	Average Forward Current		D.C., T _C = 85°C	100	A
I _{FSM}	Surge Forward Current		½ cycle, 60Hz, Peak value, non-repetitive	2000	A
I ² t	I ² t (for fusing)		Value for one cycle surge current	16700	A²s
T _j	Junction Temperature			-40 to +150	°C
T _{stg}	Storage Temperature			-40 to +125	°C
V _{ISO}	Isolation Voltage (R.M.S.)		A.C. 1 minute	2500	V
	Mounting Torque	Mounting M6	Recommended 2.5-3.9	4.7	N·m
		Terminal M5	Recommended 1.5-2.5	2.7	
	Mass		Typical Value	170	g

< Electrical Characteristics >

T_j = 25°C (unless otherwise noted) per diode

Symbol	Item	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I _{RRM}	Repetitive Peak Reverse Current	V _R = V _{RRM} , T _j = 125°C			100	mA
V _{FM}	Forward Voltage Drop	I _F = 100A, Inst. measurement		1.18	1.30	V
t _{rr}	Reverse Recovery Time	I _F = 100A, V _R = 300V, -di / dt = 100A/Fs		220	300	n s
t _b /t _a	Softness	I _F = 100A, V _R = 300V, -di / dt = 100A/Fs	0.80			
R _{th(j-c)}	Thermal Resistance	Junction to case			0.5	°C/W

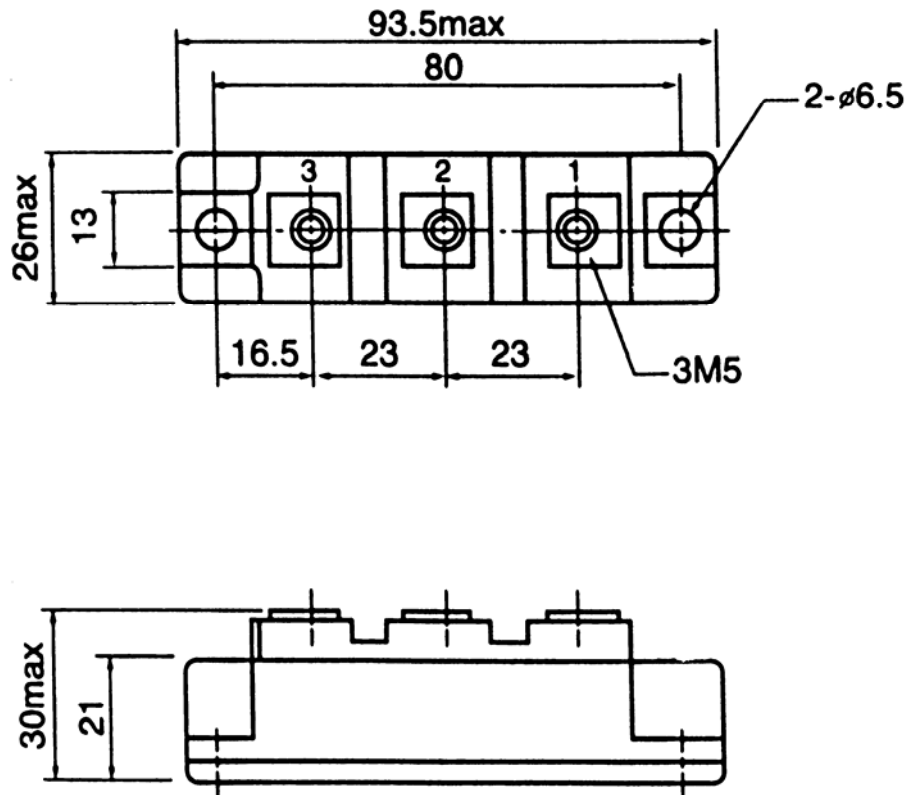

* Dimensions in millimeters