

DIP Package (Standard)



Size: 0.52 x 0.36 x 0.39 inches

SMT Package (Suffix "S")



Size: 0.52 x 0.36 x 0.39 inches

FEATURES

- Ultra small SMT and DIP Packages
- No Minimum Load Required
- High Efficiency up to 83%
- 2:1 Wide Input Voltage Ranges
- 1 Watt Maximum Output Power
- Continuous Short Circuit Protection
- 1600VDC I/O Isolation (Optional 3000VDC Isolation)
- CE Mark Meets 2006/95/EC, 2011/95/EC, & 2004/108/EC
- Compliant to RoHS EU Directive 2011/65/EU
- SMT Package Qualified for Lead-Free Reflow Solder Process According to IPC J-STD-020D
- UL60950-1, EN60950-1, & IEC60950-1 Safety Approvals

DESCRIPTION

The DCSD01 series of DC/DC power converters provides 1 watt of output power in a 0.52 x 0.36 x 0.39 inch package. This series has single and dual output models with 2:1 wide input voltage ranges of 4.5-9VDC, 9-18VDC, 18-36VDC, and 36-75VDC. Some features include high efficiency up to 83%, 1600VDC (standard) or 3000VDC (suffix "H") I/O isolation, remote ON/OFF control, and short circuit protection. Both DIP (standard) and SMT (suffix "S") package types are available for this series. All models are RoHS compliant and have UL60950-1, EN60950-1, and IEC60950-1 safety approvals. This series is best suited for use in industry control systems, wireless networks, telecom/datacom, measurement equipment, and semiconductor equipment.

MODEL SELECTION TABLE

SINGLE OUTPUT MODELS

Model Number ^{(1) (2)}	Input Voltage	Output Voltage	Output Current		Output Ripple & Noise	No Load Input Current	Output Power	Efficiency	Maximum Capacitive Load
			Min Load	Max Load					
DCSD01-5S33	5 VDC (4.5 - 9 VDC)	3.3 VDC	0mA	300mA	50mVp-p	35mA	1W	79%	1680µF
DCSD01-5S05		5 VDC	0mA	200mA	50mVp-p	35mA	1W	80%	820µF
DCSD01-5S12		12 VDC	0mA	90mA	50mVp-p	40mA	1W	83%	470µF
DCSD01-5S15		15 VDC	0mA	70mA	50mVp-p	40mA	1W	82%	330µF
DCSD01-5S24		24 VDC	0mA	45mA	50mVp-p	40mA	1W	82%	160µF
DCSD01-12S33	12 VDC (9 - 18 VDC)	3.3 VDC	0mA	300mA	50mVp-p	16mA	1W	78%	1680µF
DCSD01-12S05		5 VDC	0mA	200mA	50mVp-p	16mA	1W	79%	820µF
DCSD01-12S12		12 VDC	0mA	90mA	50mVp-p	22mA	1W	82%	470µF
DCSD01-12S15		15 VDC	0mA	70mA	50mVp-p	22mA	1W	81%	330µF
DCSD01-12S24		24 VDC	0mA	45mA	50mVp-p	22mA	1W	80%	160µF
DCSD01-24S33	24 VDC (18 - 36 VDC)	3.3 VDC	0mA	300mA	50mVp-p	8mA	1W	78%	1680µF
DCSD01-24S05		5 VDC	0mA	200mA	50mVp-p	8mA	1W	80%	820µF
DCSD01-24S12		12 VDC	0mA	90mA	50mVp-p	10mA	1W	81%	470µF
DCSD01-24S15		15 VDC	0mA	70mA	50mVp-p	10mA	1W	81%	330µF
DCSD01-24S24		24 VDC	0mA	45mA	50mVp-p	10mA	1W	80%	160µF
DCSD01-48S33	48 VDC (36 - 75 VDC)	3.3 VDC	0mA	300mA	50mVp-p	5mA	1W	79%	1680µF
DCSD01-48S05		5 VDC	0mA	200mA	50mVp-p	5mA	1W	80%	820µF
DCSD01-48S12		12 VDC	0mA	90mA	50mVp-p	5mA	1W	82%	470µF
DCSD01-48S15		15 VDC	0mA	70mA	50mVp-p	5mA	1W	83%	330µF
DCSD01-48S24		24 VDC	0mA	45mA	50mVp-p	5mA	1W	81%	160µF

DUAL OUTPUT MODELS

Model Number ^{(1) (2)}	Input Voltage	Output Voltage	Output Current		Output Ripple & Noise	No Load Input Current	Output Power	Efficiency	Maximum Capacitive Load
			Min Load	Max Load					
DCSD01-5D05	5 VDC (4.5 - 9 VDC)	±5 VDC	0mA	±100mA	50mVp-p	40mA	1W	81%	±470µF
DCSD01-5D12		±12 VDC	0mA	±45mA	50mVp-p	40mA	1W	82%	±330µF
DCSD01-5D15		±15 VDC	0mA	±35mA	50mVp-p	40mA	1W	82%	±220µF
DCSD01-12D05	12 VDC (9 - 18 VDC)	±5 VDC	0mA	±100mA	50mVp-p	22mA	1W	80%	±470µF
DCSD01-12D12		±12 VDC	0mA	±45mA	50mVp-p	22mA	1W	80%	±330µF
DCSD01-12D15		±15 VDC	0mA	±35mA	50mVp-p	22mA	1W	80%	±220µF
DCSD01-24D05	24 VDC (18 - 36 VDC)	±5 VDC	0mA	±100mA	50mVp-p	10mA	1W	79%	±470µF
DCSD01-24D12		±12 VDC	0mA	±45mA	50mVp-p	10mA	1W	80%	±330µF
DCSD01-24D15		±15 VDC	0mA	±35mA	50mVp-p	10mA	1W	81%	±220µF
DCSD01-48D05	48 VDC (36 - 75 VDC)	±5 VDC	0mA	±100mA	50mVp-p	5mA	1W	80%	±470µF
DCSD01-48D12		±12 VDC	0mA	±45mA	50mVp-p	5mA	1W	81%	±330µF
DCSD01-48D15		±15 VDC	0mA	±35mA	50mVp-p	5mA	1W	80%	±220µF

TECHNICAL SPECIFICATIONS: DCSD01 SERIES

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
 We reserve the right to change specifications based on technological advances.

SPECIFICATION			TEST CONDITIONS		Min	Typ	Max	Unit
INPUT SPECIFICATIONS								
Input Voltage Range		5VDC nominal input models		4.5	5	9	VDC	
		12VDC nominal input models		9	12	18		
		24VDC nominal input models		18	24	36		
		48VDC nominal input models		36	48	75		
Input Surge Voltage (1 sec)		5VDC nominal input models				15	VDC	
		12VDC nominal input models				25		
		24VDC nominal input models				50		
		48VDC nominal input models				100		
Input Current		No Load		See Table				
Input Reflected Ripple Current		See Note 3			10		mAp-p	
Input Filter				Capacitor type				
Remote ON/OFF	DC/DC ON	Referenced to -INPUT pin and CTRL pin applied current (See Application Circuits on page 4)		Open or high impedance				
	DC/DC OFF			2.0	3.0	4.0	mA	
Remote Off Input Current						2.5	mA	
OUTPUT SPECIFICATIONS								
Output Voltage				See Table				
Voltage Accuracy		Full load an nominal Vin		-1.0		+1.0	%	
Line Regulation		Low line to high line at full load		-0.2		+0.2	%	
Load Regulation		No load to full load		Single Output Models	-1.0		+1.0	%
				Dual Output Models	-1.0		+1.0	
		10% load to 90% load		Single Output Models	-0.5		+0.5	%
				Dual Output Models	-0.8		+0.8	
Cross Regulation (Dual Output Models)		Asymmetrical load 25% / 100% FL		-5		+5	%	
Output Power						1	W	
Output Current				See Table				
Minimum Load				0			%	
Maximum Capacitive Load		Minimum input and constant resistive load		See Table				
Ripple & Noise		Measured at 20MHz BW and with 4.7μF/25V X7R MLCC capacitor			50		mVp-p	
Transient Response Recovery Time		25% load step change			500		μs	
Start-Up Time	Power Up	Nominal input and constant resistive load			5	10	ms	
	Remote On/Off				5	10		
Temperature Coefficient				-0.02		+0.02	%/°C	
PROTECTION								
Short Circuit Protection				Continuous, automatic recovery				
GENERAL SPECIFICATIONS								
Efficiency		Nominal input voltage and full load		See Table				
Switching Frequency		Full load to minimum load		100			KHz	
Isolation Voltage (Input to Output)		1 minute		Standard models	1600		VDC	
				Suffix “H” models	3000			
Isolation Resistance		500VDC		1			GΩ	
Isolation Capacitance		Standard models				50	pF	
		Suffix “H” models				50		
ENVIRONMENTAL SPECIFICATIONS								
Operating Ambient Temperature		Without derating		-40		+90	°C	
Storage Temperature				-55		+125	°C	
Relative Humidity				5		95	% RH	
Thermal Shock				MIL-STD-810F				
Vibration				MIL-STD-810F				
Lead-Free Reflow Solder Process				IPC J-STD-020D				
Moisture Sensitivity Level (MSL)				IPC J-STD-033B Level 2				
MTBF		MIL-HDBK-217F, Ta=25°C, Full load		8,534,000 hours				
PHYSICAL SPECIFICATIONS								
Weight				0.10oz (2.7g)				
Dimensions (L x W x H)				0.52x0.36x0.39 inches (13.2x9.1x9.9 mm)				
Case Material				Non-conductive black plastic				
Base Material				Non-conductive black plastic				
Potting Material				Silicone (UL94-V0)				

SAFETY & EMC

Safety Approvals	IEC60950-1, UL60950-1, EN60950-1	
EMI (See Note 3)	EN55022	Class A, Class B
ESD	EN61000-4-2	Air ±8KV Contact ±6KV Perf. Criteria A
Radiated Immunity	EN61000-4-3	10 V/m Perf. Criteria A
Fast Transient (See Note 4)	EN61000-4-4	±2KV Perf. Criteria A
Surge (See Note 4)	EN61000-4-5	±1KV Perf. Criteria A
Conducted Immunity	EN61000-4-6	10 Vrms Perf. Criteria A

NOTES


- Two package types are available. DIP is standard; for SMT type add the suffix "S" to the model number. See model number setup for ordering details.
- 1600VDC I/O isolation is standard; for 3000VDC I/O isolation add the suffix "H" to the model number. See model number setup for ordering details.
- The DCSD01 series can only meet EMI Class A or Class B and input reflected ripple current with external components added. Please contact factory for more information.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor recommended is Nippon chemi-con KY series, 220µF/100V

**Due to advances in technology, specifications are subject to change without notice.*

CAUTION: This power module is not internally fused. An input line fuse must always be used.


DERATING CURVE

DCSD01-48S05 Derating Curve

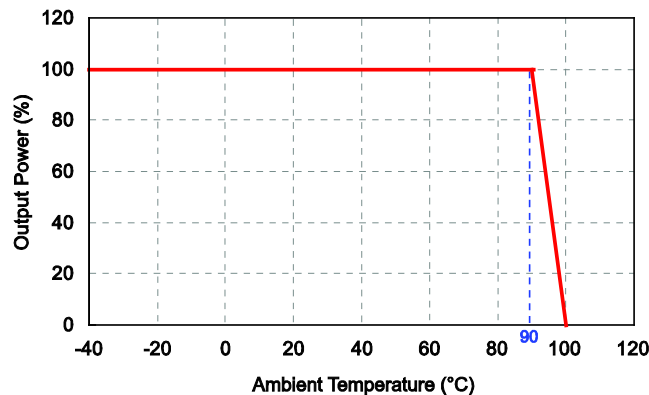


EFFICIENCY CURVES

DCSD01-48S05 Efficiency vs Input Voltage

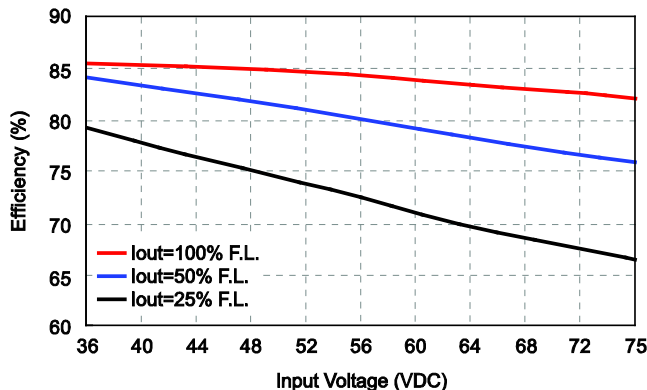


DCSD01-48S05 Efficiency vs Output Current

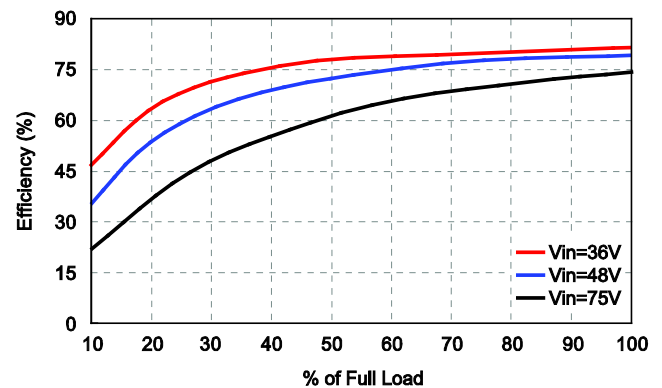


REMOTE ON/OFF APPLICATION CIRCUIT

The positive logic structure turns the DC/DC module ON during a logic High on the CTRL pin and turns the DC/DC module OFF during a logic Low on the CTRL pin. The CTRL pin is an open collector/drain logic input signal (Von/off) that is referenced to GND. When not using the remote ON/OFF feature please open circuit between the CTRL pin and input pin to turn the module ON.

DC/DC ON

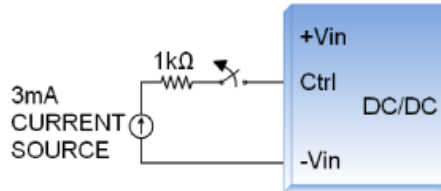


DC/DC OFF

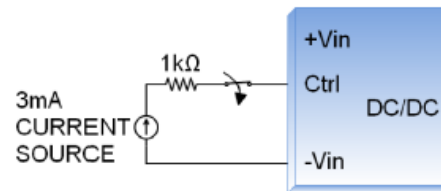


MECHANICAL DRAWINGS

DIP Type (Standard)

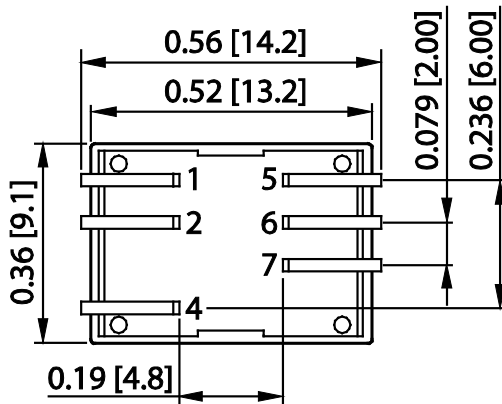

BOTTOM VIEW

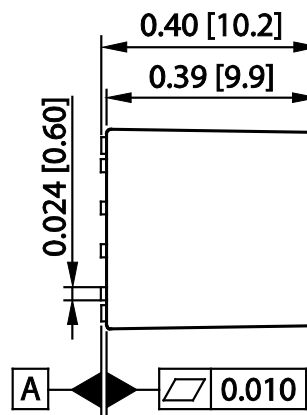


PIN CONNECTIONS		
PIN	SINGLE	DUAL
1	+INPUT	+INPUT
2	-INPUT	-INPUT
4	CTRL	CTRL
5	NC	-OUTPUT
6	-OUTPUT	COMMON
7	+OUTPUT	+OUTPUT


NOTES

1. All dimensions in inches [mm]
2. Tolerance: X.XX±0.02 [X.X±0.5]
X.XXX±0.01 [X.XX±0.25]
3. Pin Pitch Tolerance: ±0.01 [±0.25]
4. Pin Dimension Tolerance: ±0.004 [±0.1]
5. All dimensions are for reference only

SMT Type (Suffix "S")

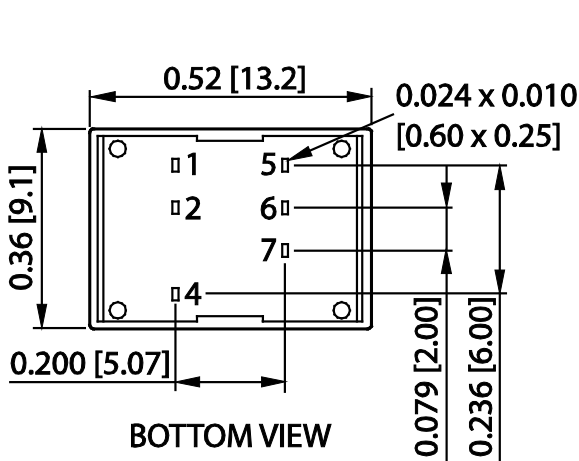

BOTTOM VIEW

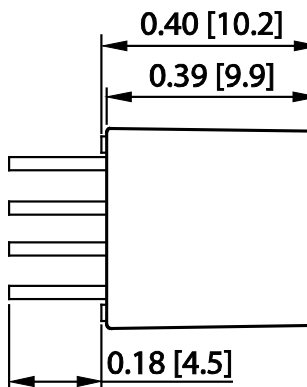

PIN CONNECTIONS		
PIN	SINGLE	DUAL
1	+INPUT	+INPUT
2	-INPUT	-INPUT
4	CTRL	CTRL
5	NC	-OUTPUT
6	-OUTPUT	COMMON
7	+OUTPUT	+OUTPUT

NOTES

1. All dimensions in inches [mm]
2. Tolerance: X.XX±0.02 [X.X±0.5]
X.XXX±0.01 [X.XX±0.25]
3. Pin Pitch Tolerance: ±0.01 [±0.25]
4. Pin Dimension Tolerance: ±0.004 [±0.1]
5. All dimensions are for reference only

MODEL NUMBER SETUP

DCSD	01	-	48	S	12	S	H
Series Name	Output Power		Input Voltage	Output Quantity	Output Voltage	Assembly Options	Isolation
	01: 1 Watt		5: 4.5-9 VDC 12: 9-18 VDC 24: 18-36 VDC 48: 36-75 VDC	S: Single Output D: Dual Output	33: 3.3 VDC 05: 5 VDC 12: 12 VDC 15: 15 VDC 24: 24 VDC 05: ±5 VDC 12: ±12 VDC 15: ±15 VDC	None: DIP Type S: SMT Type	None: 1600VDC Isolation H: 3000VDC Isolation

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300
Toll Free: ☎(888)597-9255
Fax: ☎(603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833