

Directional Coupler

50Ω 11 dB Coupling 2400 to 7200 MHz

Maximum Ratings

Operating Temperature	-55°C to 105°C
Storage Temperature	-55°C to 105°C

Input Power ¹	1W
--------------------------	----


Permanent damage may occur if any of these limits are exceeded.

1. Derate linearly 0.5W at 0.5°C

Pad Connections

INPUT	1
OUTPUT	4
COUPLED	6
TERMINATION	3
GROUND	2.5


Outline Drawing

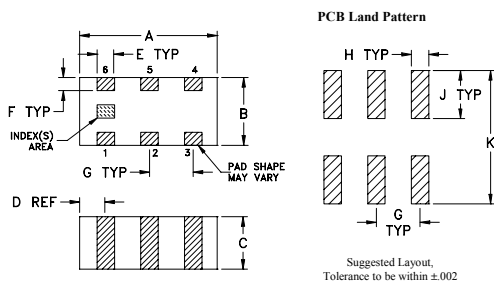

Outline Dimensions (inch)

A	B	C	D	E	F
.063	.031	.024	.012	.008	.006
1.60	0.79	0.61	0.30	0.20	0.15
G	H	J	K	wt	
.020	.010	.022	.053	grams	
0.51	0.25	0.56	1.35	0.005	

Demo Board MCL P/N: TB-DCW-11-722+
Suggested PCB Layout (PL-572)

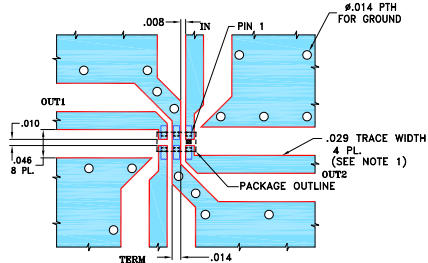

NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4, GRADE IT-180TC (ITEQ CORP.)
WITH DIELECTRIC THICKNESS .016±.0015. COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS, TRACE WIDTH & GAP WIDTH MAY BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Features

- Wideband, 2400-7200 MHz
- Excellent return loss for input/output ports ideal for signal-tap
- Ultra small size, 0603 (1.6 x 0.8 mm)
- Temperature stable
- LTCC construction

Applications




- ISM
- WiMAX
- Wi-Fi
- UMTS
- PCS
- LTE

Electrical Specifications at 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		2400		7200	MHz
Mainline Loss	2400-7200	—	0.7	2.2	dB
Coupling	2400-7200	—	13	—	dB
Coupling Flatness(±)	2400-7200	—	2.5	—	dB
Directivity	2400-7200	—	12	—	dB
Return Loss (Input)	2400-7200	9.5	17	—	dB
Return Loss (Output)	2400-7200	9.5	17	—	dB

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)	Directivity (dB)	Return Loss (dB)		
	In-Out	In-Cpl		In	Out	Cpl
2400	0.36	13.93	13.69	34.89	31.26	23.33
2800	0.42	12.93	13.86	31.59	27.87	22.12
3400	0.50	11.84	13.86	25.48	23.92	21.83
4000	0.58	11.11	13.54	22.22	21.59	21.39
4600	0.64	10.69	13.39	20.58	20.63	20.42
5000	0.66	10.58	13.77	19.80	20.51	20.09
5600	0.67	10.66	14.81	19.22	19.79	19.16
6200	0.66	11.12	17.41	18.42	18.10	16.77
6800	0.66	12.07	21.40	16.78	15.58	13.28
7200	0.67	12.92	16.67	15.83	13.96	11.49

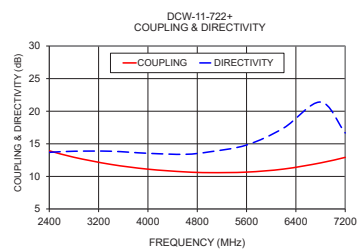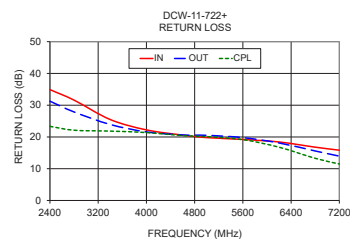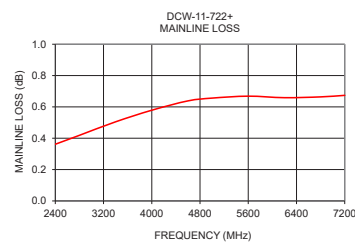

Electrical Schematic



* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLERS REQUIRING EXTERNAL TERMINATION THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS



Generic photo used for illustration purposes only

CASE STYLE: JC0603C

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 4000

Notes





- A.** Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

REV. OR
ECO-001880
DCW-11-722+
AVB/CP/AM
200116

Typical Performance Data


FREQUENCY (MHz)	INSERTION LOSS (dB)	COUPLING (dB)	DIRECTIVITY (dB)	RETURN LOSS (dB)		
				IN	OUT	CPL
2000	0.30	15.20	13.40	34.97	32.82	25.24
2100	0.32	14.86	13.43	35.05	32.35	24.57
2200	0.33	14.52	13.42	36.82	31.31	23.95
2300	0.35	14.22	13.61	35.11	31.67	23.75
2400	0.36	13.93	13.69	34.89	31.26	23.33
2500	0.38	13.66	13.68	35.06	29.91	22.88
2600	0.39	13.41	13.88	32.88	30.28	22.85
2700	0.41	13.16	13.85	32.22	29.08	22.46
2800	0.42	12.93	13.86	31.59	27.87	22.12
2900	0.44	12.72	14.03	29.81	27.89	22.36
3000	0.45	12.53	13.96	28.96	26.77	22.10
3100	0.46	12.33	13.92	28.13	25.77	21.91
3200	0.48	12.16	14.02	26.77	25.55	22.22
3300	0.49	12.00	13.89	26.21	24.65	21.89
3400	0.50	11.84	13.86	25.48	23.92	21.83
3500	0.52	11.70	13.88	24.43	23.68	22.02
3600	0.53	11.56	13.73	24.16	23.05	21.77
3700	0.54	11.43	13.70	23.62	22.54	21.64
3800	0.56	11.32	13.73	22.90	22.53	21.81
3900	0.57	11.21	13.55	22.64	21.94	21.51
4000	0.58	11.11	13.54	22.22	21.59	21.39
4100	0.59	11.02	13.52	21.65	21.57	21.47
4200	0.60	10.94	13.39	21.57	21.16	21.03
4300	0.61	10.86	13.44	21.25	21.05	20.92
4400	0.62	10.80	13.45	20.80	21.01	20.96
4500	0.63	10.74	13.34	20.87	20.69	20.57
4600	0.64	10.69	13.39	20.58	20.63	20.42
4700	0.64	10.65	13.50	20.27	20.76	20.42
4800	0.65	10.62	13.50	20.25	20.47	20.16
4900	0.66	10.59	13.66	20.04	20.44	20.12
5000	0.66	10.58	13.77	19.80	20.51	20.09
5100	0.66	10.57	13.77	19.82	20.18	19.80
5200	0.67	10.57	13.99	19.69	20.25	19.75
5300	0.67	10.58	14.16	19.44	20.21	19.78
5400	0.67	10.59	14.31	19.56	19.91	19.49
5500	0.67	10.62	14.54	19.45	19.89	19.35
5600	0.67	10.66	14.81	19.22	19.79	19.16
5700	0.67	10.70	15.06	19.29	19.48	18.81
5800	0.67	10.77	15.44	19.10	19.28	18.58
5900	0.67	10.83	15.87	18.91	19.05	18.30
6000	0.67	10.92	16.19	18.88	18.64	17.71
6100	0.67	11.02	16.76	18.62	18.36	17.24
6200	0.66	11.12	17.41	18.42	18.10	16.77
6300	0.66	11.25	17.90	18.26	17.61	16.06
6400	0.66	11.39	18.77	18.05	17.27	15.52
6500	0.66	11.54	19.50	17.67	16.85	14.94
6600	0.66	11.70	20.25	17.46	16.31	14.29
6700	0.66	11.88	21.03	17.16	16.00	13.79
6800	0.66	12.07	21.40	16.78	15.58	13.28
6900	0.66	12.27	20.91	16.56	15.06	12.69
7000	0.67	12.48	19.74	16.27	14.76	12.32
7100	0.67	12.69	18.33	15.96	14.37	11.89
7200	0.67	12.92	16.67	15.83	13.96	11.49
7300	0.68	13.14	14.96	15.60	13.69	11.30
7400	0.69	13.36	13.43	15.42	13.36	11.04
7500	0.69	13.57	11.98	15.38	13.06	10.84
7600	0.70	13.78	10.63	15.34	12.88	10.80
7700	0.70	13.98	9.40	15.31	12.72	10.73
7800	0.71	14.17	8.29	15.46	12.48	10.76
7900	0.71	14.35	7.21	15.62	12.44	10.88
8000	0.70	14.53	6.29	15.80	12.37	11.03

Typical Performance Curves

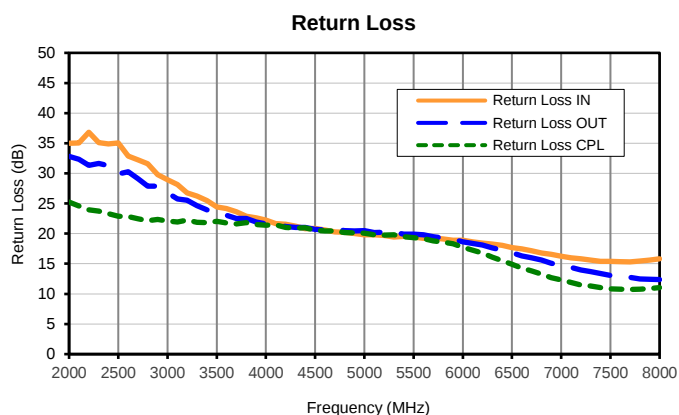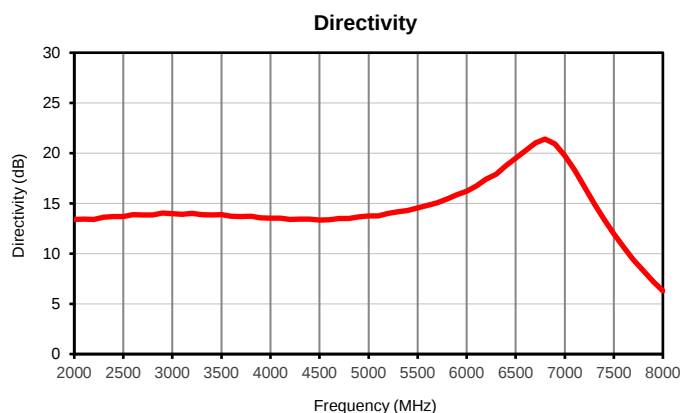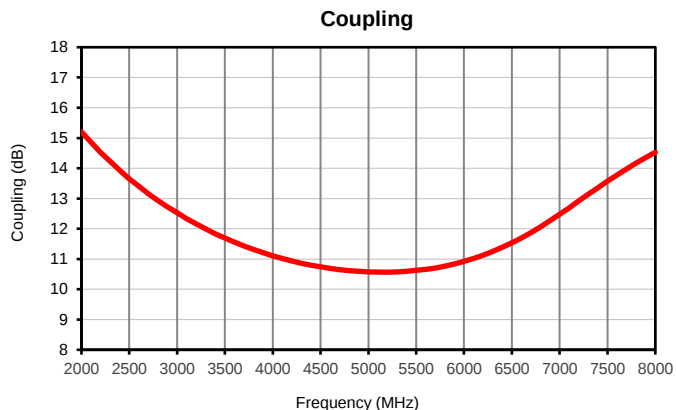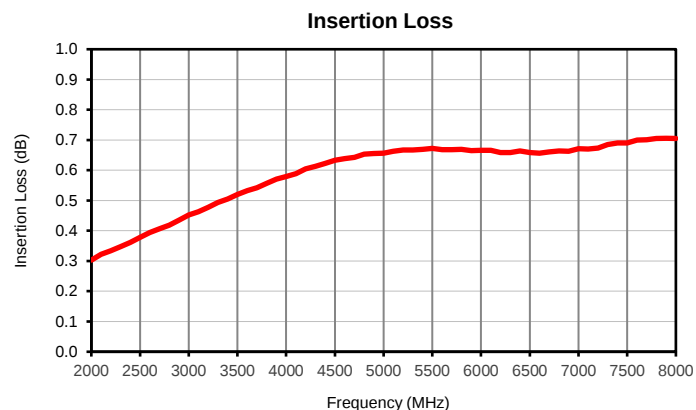


Outline Dimensions

JC0603C

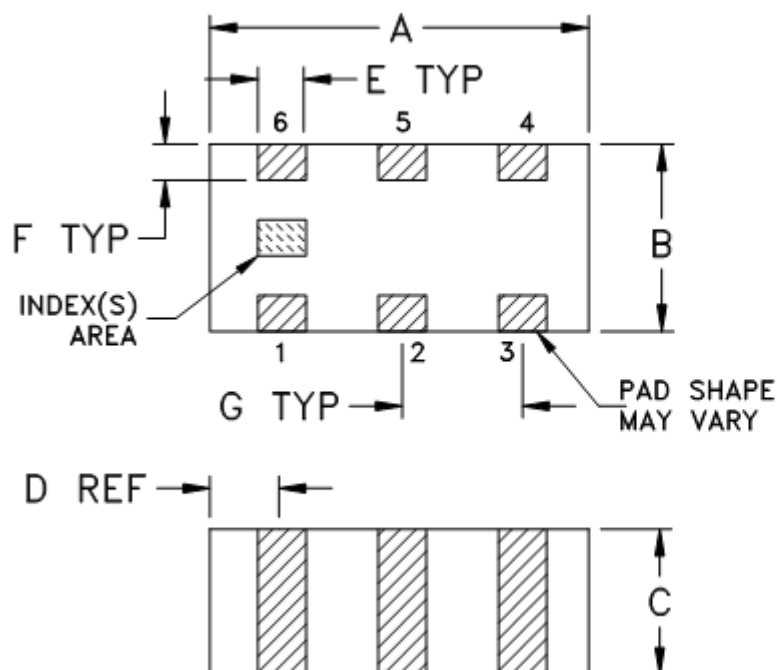

PCB Land Pattern

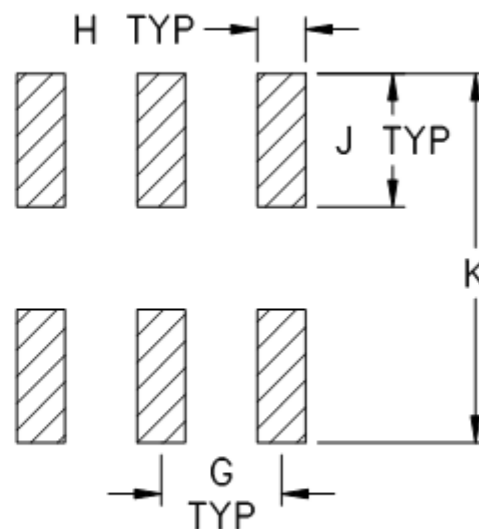

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
JC0603C	.063 (1.60)	.031 (0.80)	.024 (0.60)	.012 (0.30)	.008 (0.20)	.006 (0.15)	.020 (0.50)	.010 (0.25)	.022 (0.55)	0.053 (1.35)	.005

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Open style, ceramic base.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F114

DEVICE ORIENTATION IN T&R

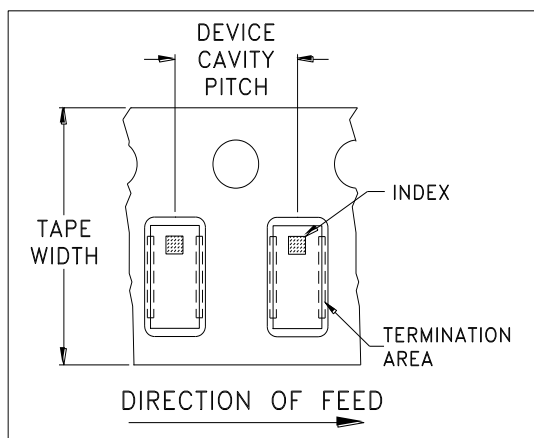


ILLUSTRATION 1

Applicable Case Styles	
GE0805C	JC0603C
GE0805C-1	JC0603C-4
GE0805C-1AP	JC0603C-6
GE0805C-7	
GE0805C-9	
GE0805C-10	
GE0805C-11	
GE0805C-12	

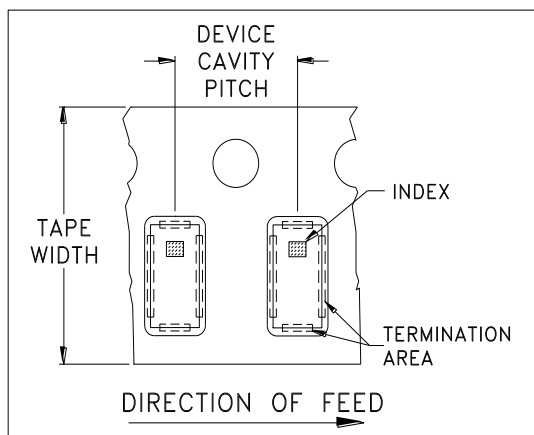


ILLUSTRATION 2

Applicable Case Styles	
GE0805C-2	JC0603C-1
GE0805C-3	JC0603C-2
GE0805C-4	JC0603C-3
GE0805C-5	JC0603C-5
GE0805C-6	JC0603C-7
GE0805C-8	JV1210C-1

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	4000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A