SHINDENGEN

Schottky Rectifiers (SBD)

Dual

DF15SC4M

40V 15A

FEATURES

- SMT
- Tj150℃
- P_{RRSM} avalanche guaranteed
- High current capacity with Small Package


APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

Case : STO-220

Unit : mm

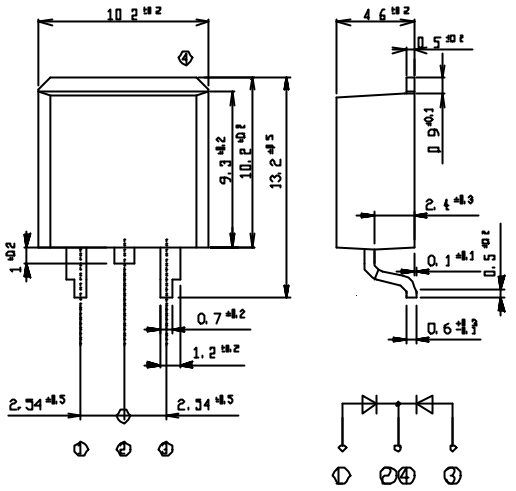

RATINGS


●Absolute Maximum Ratings (If not specified Tc=25℃)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-40～150	℃
Operating Junction Temperature	Tj		150	℃
Maximum Reverse Voltage	V_{RM}		40	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	Io	50Hz sine wave, R-load, Tc=129℃	15	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=125℃	150	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10μs, Rating of per diode, Tj= 25℃	330	W


●Electrical Characteristics (If not specified Tc=25℃)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	I_F=7.5A, Pulse measurement, Rating of per diode	Max.0.55	V
Reverse Current	I_R	V_R=V_{RM}, Pulse measurement, Rating of per diode	Max.5	mA
Junction Capacitance	Cj	f=1MHz, V_R=10V, Rating of per diode	Typ.340	pF
Thermal Resistance	θjc	junction to case	Max.1.7	℃/W


Copyright & Copy;2000 Shindengen Electric Mfg.Co.Ltd

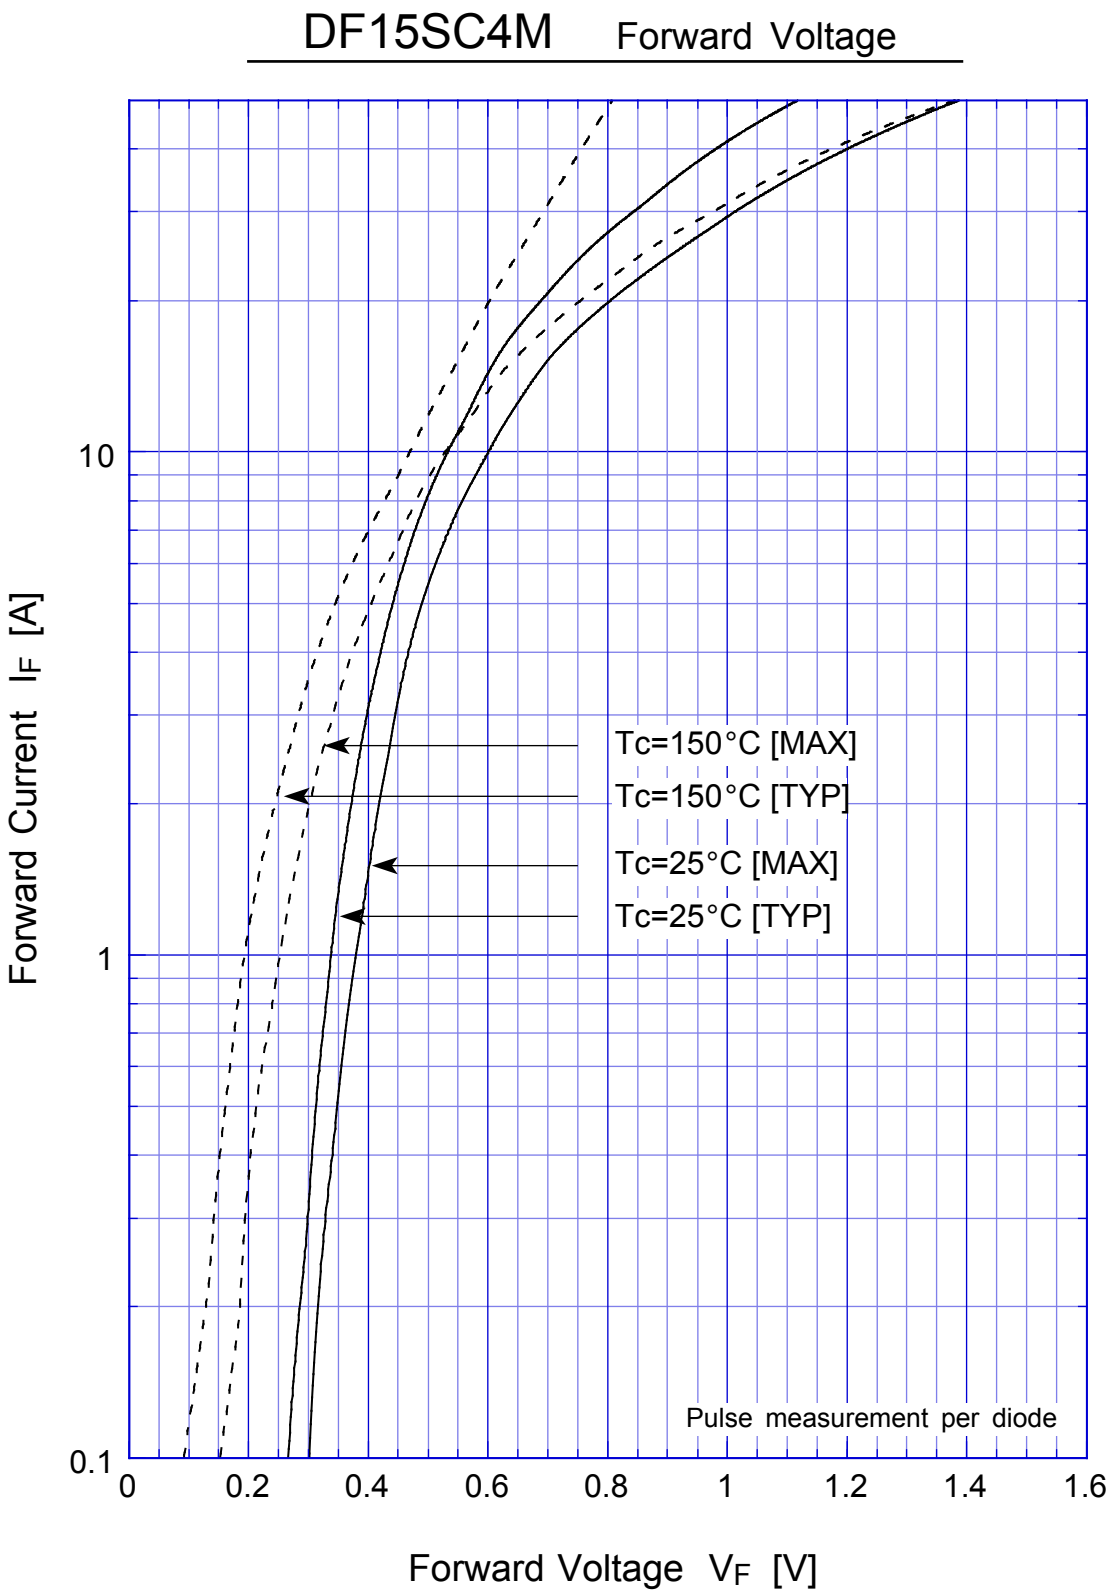
DF15SC4M Forward Voltage
Forward Current IF [A]
10
1
0.1
0
0.2
0.4
0.6
0.8
1
1.2
1.4
1.6
Forward Voltage VF [V]
Tc=150°C [MAX]
Tc=150°C [TYP]
Tc=25°C [MAX]
Tc=25°C [TYP]
Pulse measurement per diode

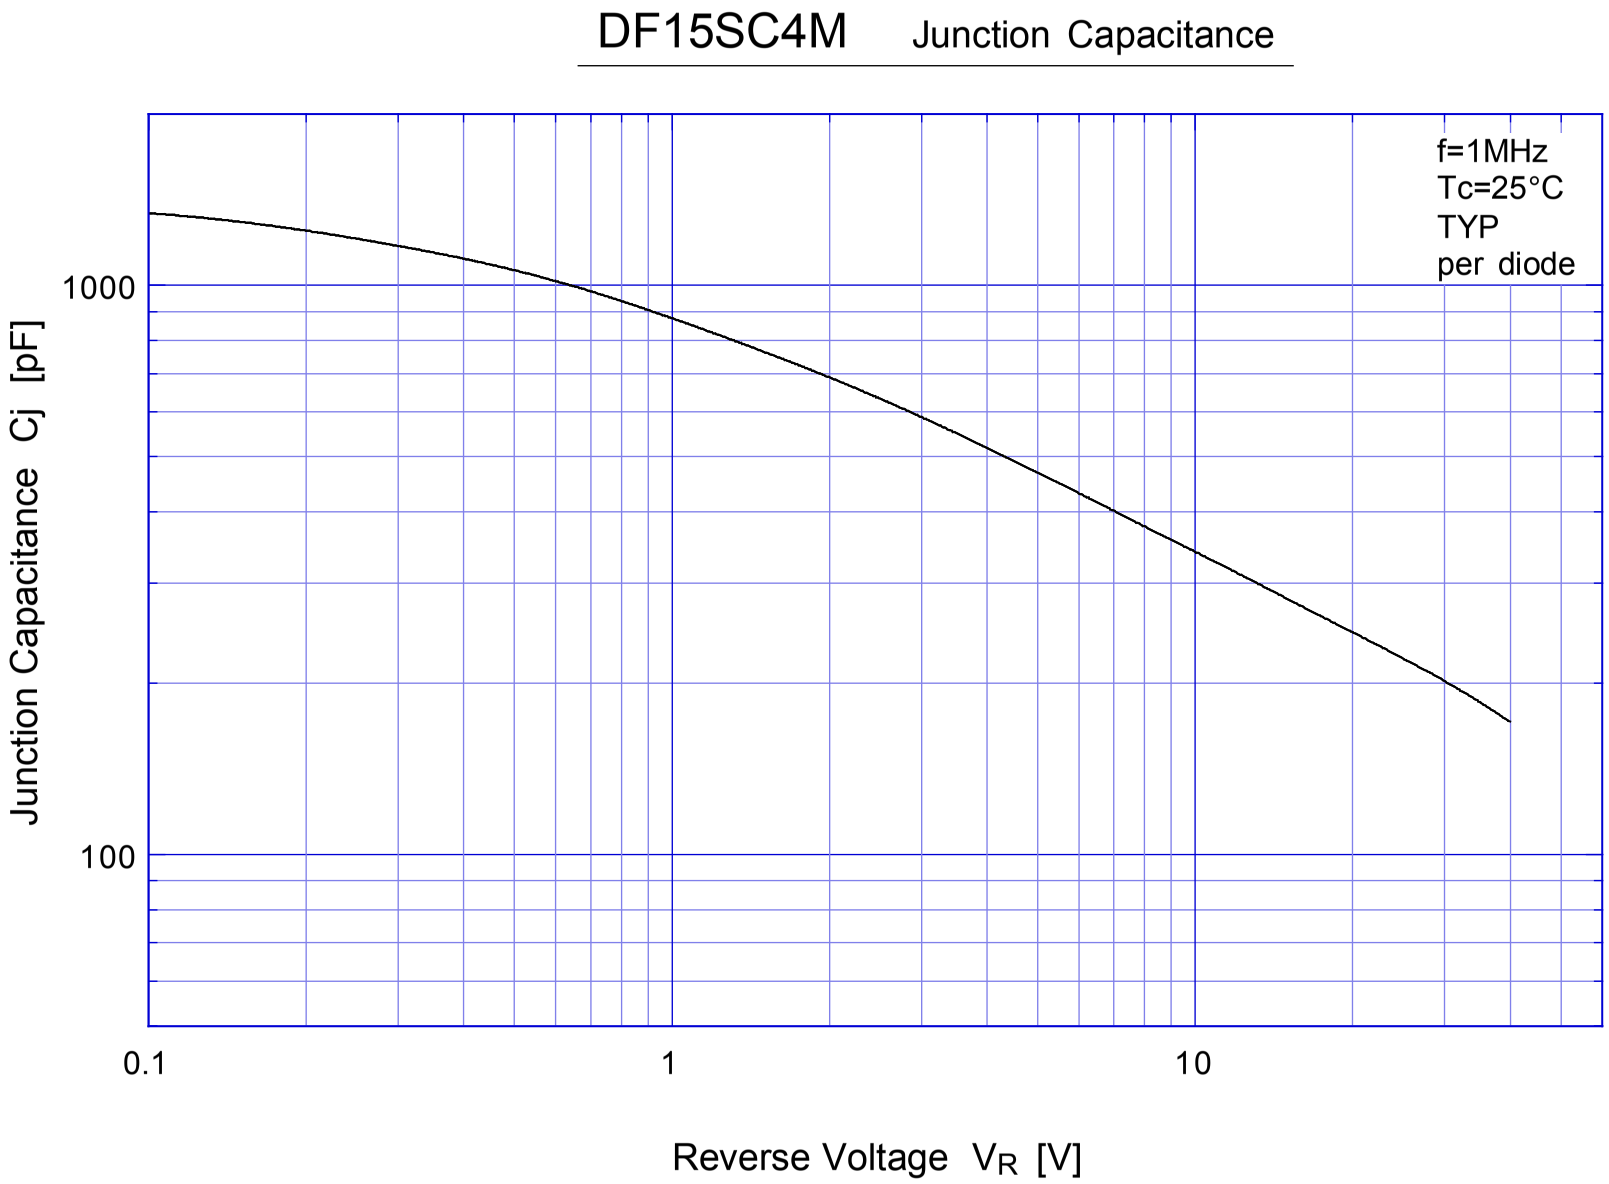

DF15SC4M Junction Capacitance
f=1MHz
Tc=25°C
TYP
per diode
1000
100
Junction Capacitance Cj [pF]
0.1
1
10
Reverse Voltage VR [V]

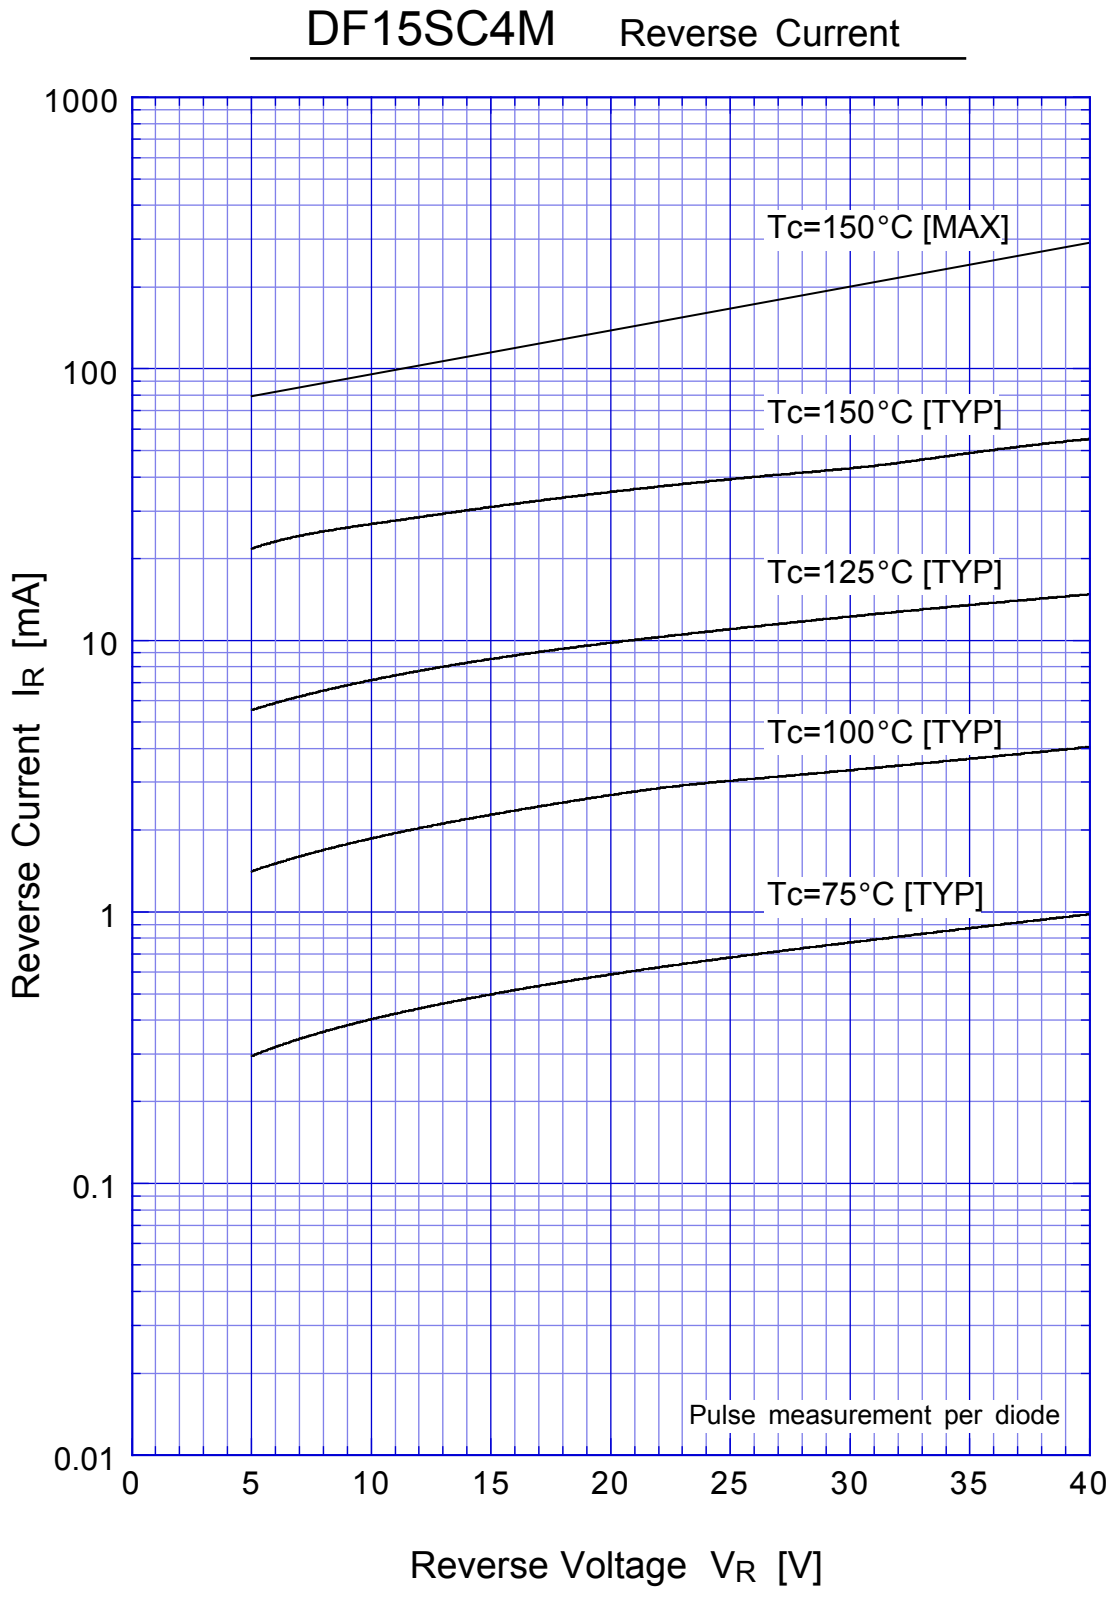
DF15SC4M Reverse Current
1000
100
10
1
0.1
0.01
Reverse Current IR [mA]
Tc=150°C [MAX]
Tc=150°C [TYP]
Tc=125°C [TYP]
Tc=100°C [TYP]
Tc=75°C [TYP]
Pulse measurement per diode
0
5
10
15
20
25
30
35
40
Reverse Voltage VR [V]


DF15SC4M Reverse Power Dissipation

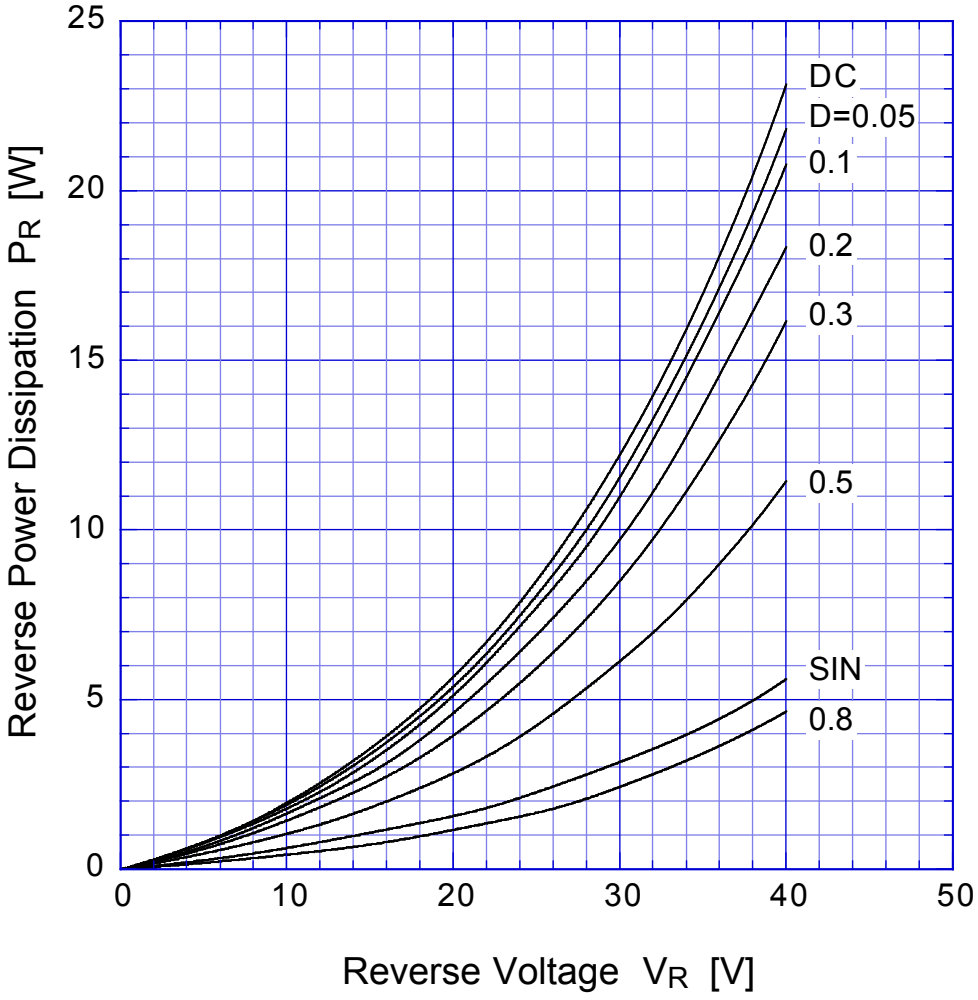


Tj = 150°C

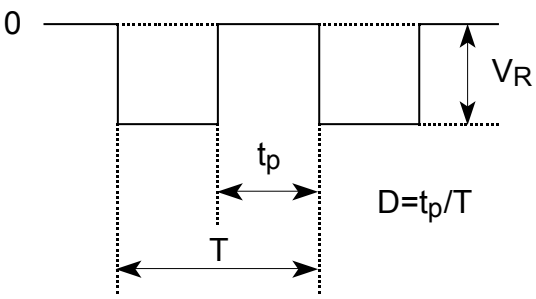


DF15SC4M Forward Power Dissipation

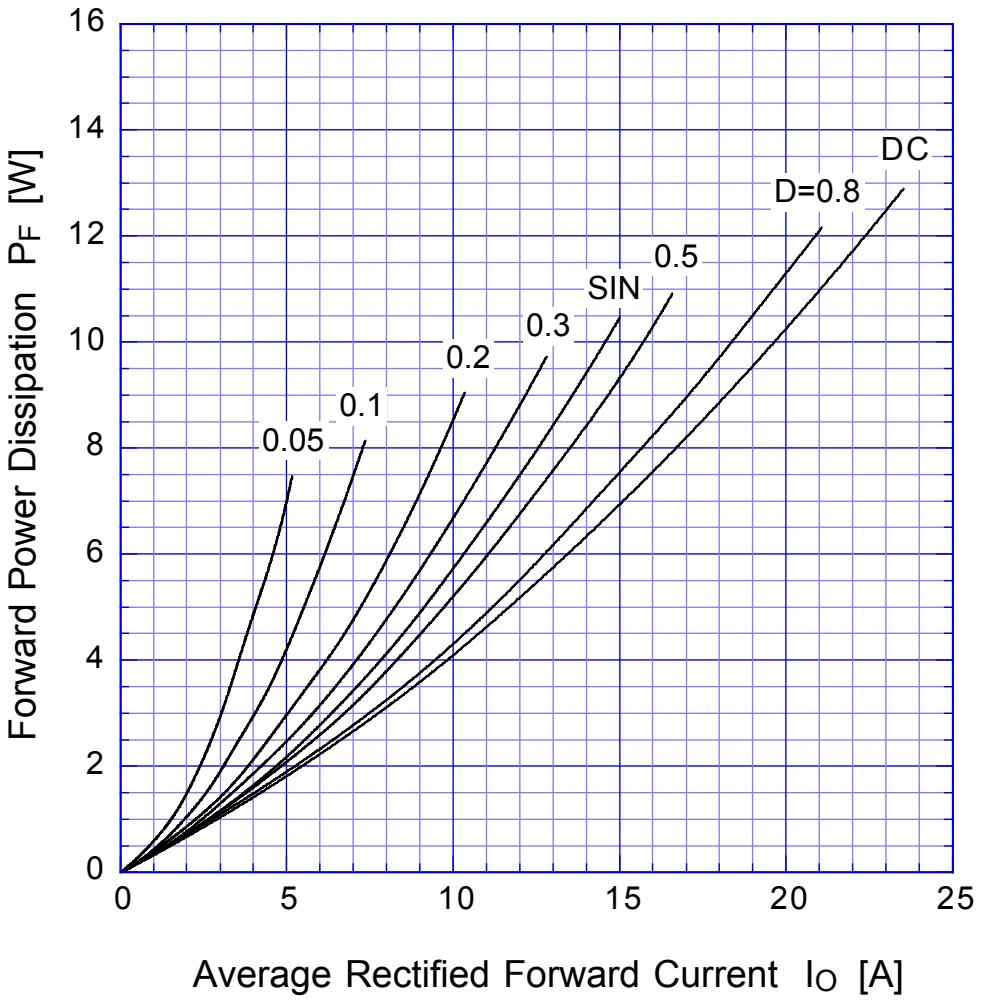


Tj = 150°C

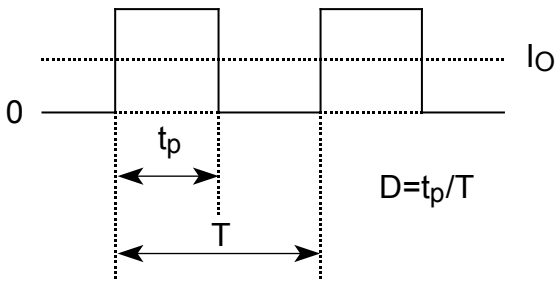


DF15SC4M Derating Curve

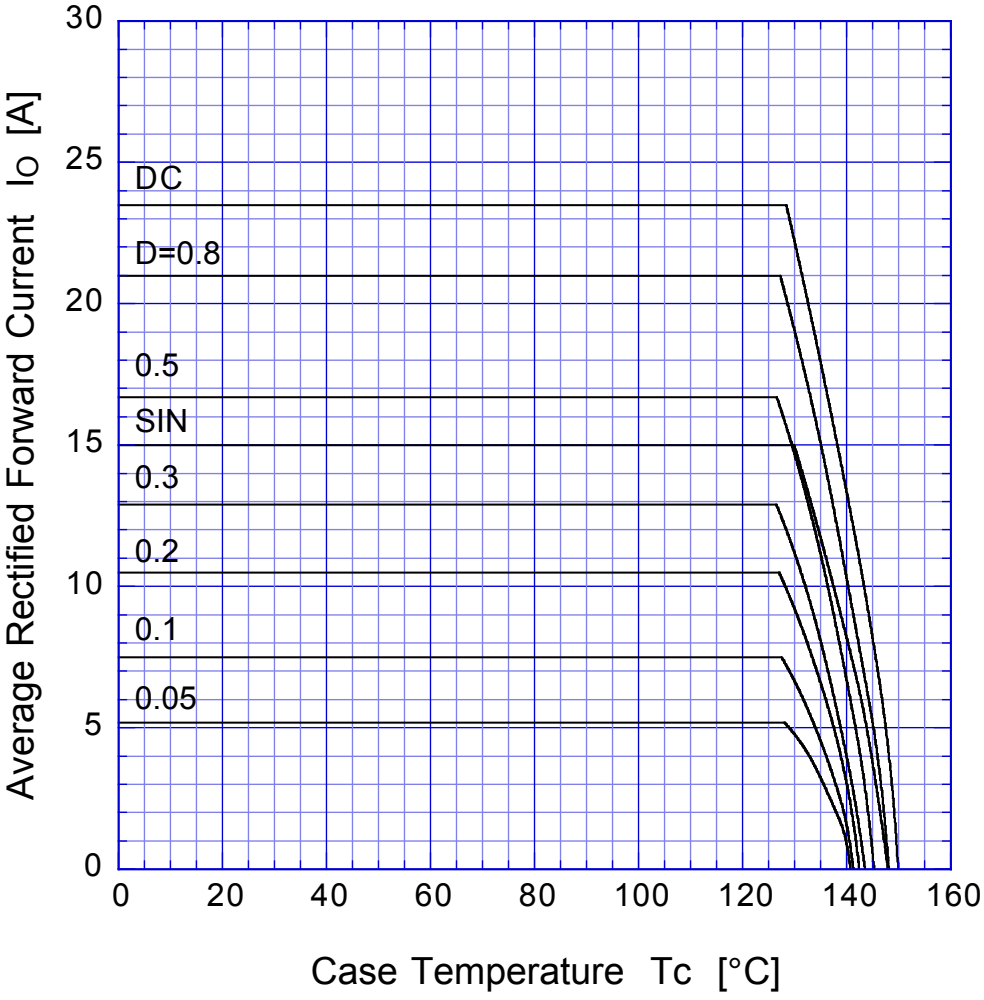


V_R = 20V

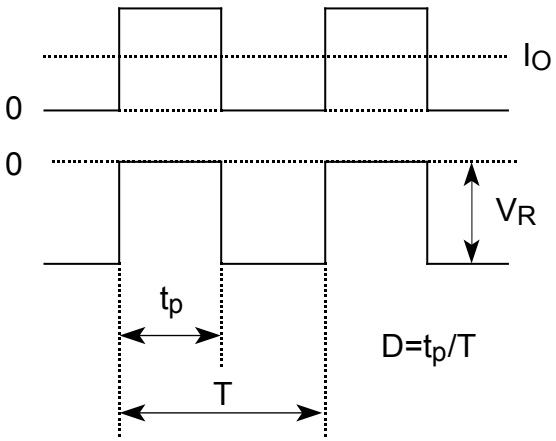


DF15SC4M Peak Surge Forward Capability

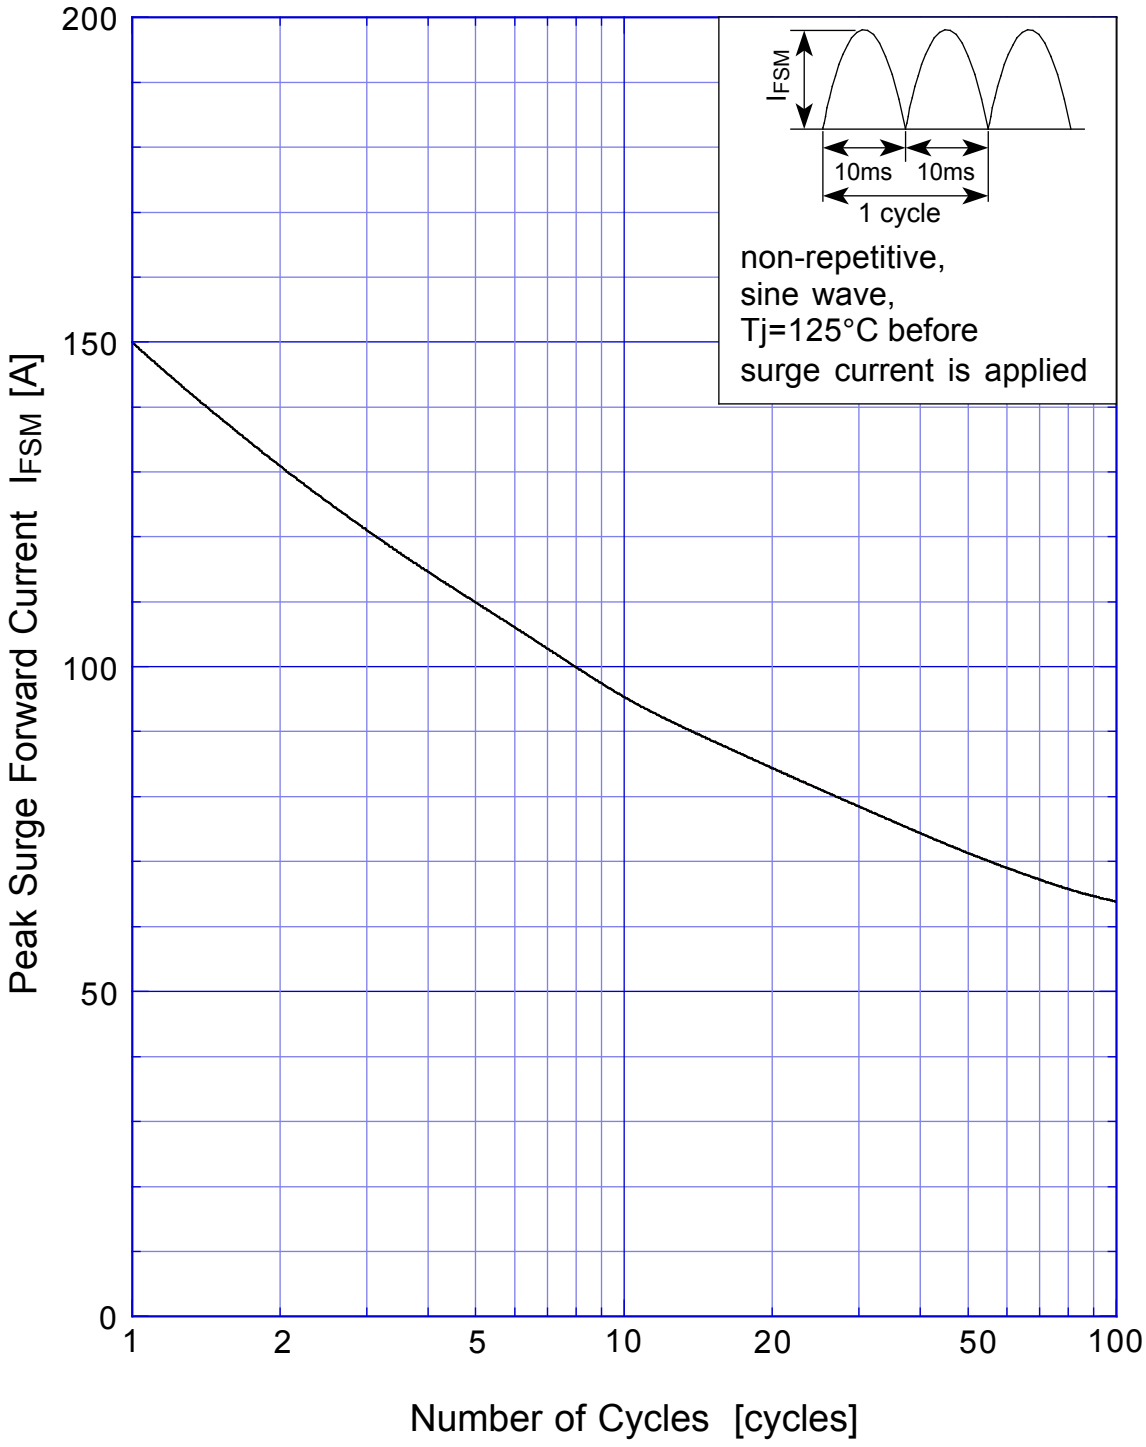

SBD Repetitive Surge Reverse Power Derating Curve

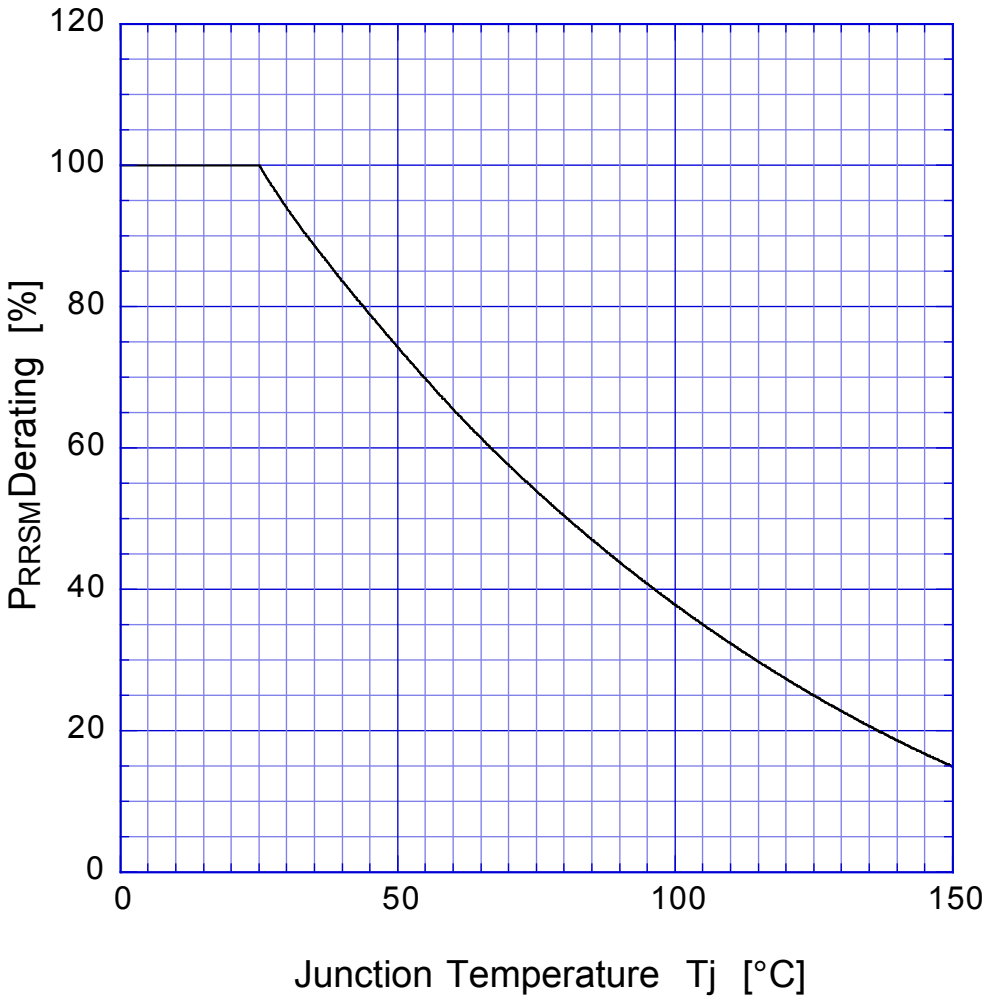

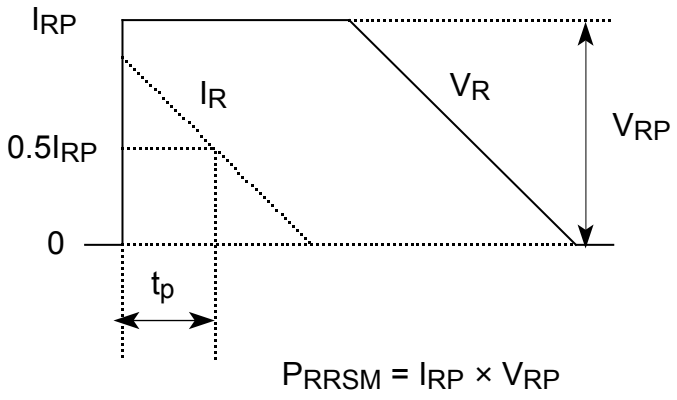

SBD Repetitive Surge Reverse Power Capability

