Low-Voltage Single SPDT Analog Switch

FEATURES

- Low Voltage Operation (1.6 V to 3.6 V)
- Low On-Resistance - $r_{DS(on)}$: 0.85 Ω Typ.
- Fast Switching - t_{ON} : 28 ns, t_{OFF}: 12 ns
- Low Leakage
- TTL/CMOS Compatible
- 6-Pin SC-70 Package

BENEFITS

- Reduced Power Consumption
- Simple Logic Interface
- High Accuracy
- Reduce Board Space

APPLICATIONS

- Cellular Phones
- Communication Systems
- Portable Test Equipment
- Battery Operated Systems
- Sample and Hold Circuits


DESCRIPTION

The DG2714 is a single-pole/double-throw monolithic CMOS analog switch designed for high performance switching of analog signals. Combining low power, high speed (t_{ON}: 28 ns, t_{OFF}: 12 ns), low on-resistance ($r_{DS(on)}$: 0.85 Ω) and small physical size (SC70), the DG2714 is ideal for portable and battery powered applications requiring high performance and efficient use of board space.

The DG2714 is built on Vishay Siliconix's low voltage submicron CMOS process. An epitaxial layer prevents latchup. Break-before -make is guaranteed for DG2714.

Each switch conducts equally well in both directions when on, and blocks up to the power supply level when off.

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

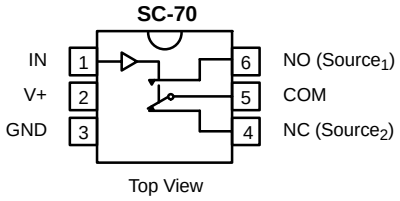

Top View

Device Marking: E8xx

TRUTH TABLE		
Logic	**NC**	**NO**
0	ON	OFF
1	OFF	ON

ORDERING INFORMATION		
Temp Range	**Package**	**Part Number**
-40 to 85°C	SC70-6	DG2714DL

ABSOLUTE MAXIMUM RATINGS

Reference to GND
V+ ..... -0.3 to +4 V
IN, COM, NC, NO[a] ..... -0.3 to (V+ + 0.3 V)
Continuous Current (NO, NC and COM Pins) ..... ±200 mA
Peak Current ..... ±300 mA
(Pulsed at 1 ms, 10% duty cycle)
Storage Temperature (D Suffix) ..... -65 to 150°C

Power Dissipation (Packages)[b]
6-Pin SO70[c] ..... 250 mW

Notes:
a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
b. All leads welded or soldered to PC Board.
c. Derate 3.1 mW/°C above 70°C

SPECIFICATIONS (V+ = 1.8 V)

Parameter	Symbol	Test Conditions Otherwise Unless Specified V+ = 1.8 V, ±10%, V_{IN} = 0.4 or 1.1 V[e]	Temp[a]	Limits -40 to 85°C Min[b]	Typ[c]	Max[b]	Unit
Analog Switch							
Analog Signal Range[d]	V_{NO}, V_{NC}, V_{COM}		Full	0		V+	V
On-Resistance	r_{ON}	V+ = 1.8 V, V_{COM} = 0.2 V/0.9 V, I_{NO}, I_{NC} = 10 mA	Room Full[d]		1.8	3.0 4.5	Ω
r_{ON} Flatness[d]	r_{ON} Flatness	V+ = 1.8 V, V_{COM} = 0 to V+, I_{NO}, I_{NC} = 10 mA	Room			2	Ω
r_{ON} Match[d]	Δr_{ON}	V+ = 1.8 V, V_{COM} = 0 to V+, I_{NO}, I_{NC} = 10 mA	Room			0.06	Ω
Switch Off Leakage Current[f]	$I_{NO(off)}$, $I_{NC(off)}$	V+ = 2.2 V, V_{NO}, V_{NC} = 0.2 V/2.0 V, V_{COM} = 2.0 V/0.2 V	Room Full[d]	-1 -10		1 10	nA
	$I_{COM(off)}$	V+ = 2.2 V, V_{NO}, V_{NC} = 0.2 V/2.0 V, V_{COM} = 2.0 V/0.2 V	Room Full[d]	-1 -10		1 10	nA
Channel-On Leakage Current[f]	$I_{COM(on)}$	V+ = 2.2 V, V_{NO}, V_{NC} = V_{COM} = 0.2 V/2.0 V	Room Full[d]	-1 -10		1 10	nA
Digital Control							
Input High Voltage	V_{INH}		Full	1.1			V
Input Low Voltage	V_{INL}		Full			0.4	V
Input Capacitance[d]	C_{in}		Full		3.5		pF
Input Current[f]	I_{INL} or I_{INH}	V_{IN} = 0 or V+	Full	-1		1	µA
Dynamic Characteristics							
Turn-On Time[d]	t_{ON}	V_{NO} or V_{NC} = 1.5 V, R_L = 300 Ω, C_L = 35 pF Figures 1 and 2	Room Full[d]		55	75 89	ns
Turn-Off Time[d]	t_{OFF}	V_{NO} or V_{NC} = 1.5 V, R_L = 300 Ω, C_L = 35 pF Figures 1 and 2	Room Full[d]		19	39 40	ns
Break-Before-Make Time[d]	t_d	V_{NO} or V_{NC} = 1.5 V, R_L = 300 Ω, C_L = 35 pF Figures 1 and 2	Room	3			ns
Charge Injection[d]	Q_{INJ}	C_L = 1 nF, V_{GEN} = 0 V, R_{GEN} = 0 Ω, Figure 3	Room		13		pC
Off-Isolation[d]	OIRR	R_L = 50 Ω, C_L = 5 pF, f = 1 MHz	Room		-64		dB
Crosstalk[d]	X_{TALK}	R_L = 50 Ω, C_L = 5 pF, f = 1 MHz	Room		-64		dB
NO, NC Off Capacitance[d]	$C_{NO(off)}$, $C_{NC(off)}$	V_{IN} = 0 or V+, f = 1 MHz	Room		32		pF
Channel-On Capacitance[d]	C_{ON}	V_{IN} = 0 or V+, f = 1 MHz	Room		78		pF

SPECIFICATIONS (V+ = 3.0 V)


Parameter	Symbol	Test Conditions Otherwise Unless Specified V+ = 3 V, ±10%, V_{IN} = 0.5 or 1.5 V[e]	Temp[a]	Limits -40 to 85°C Min[b]	Typ[c]	Max[b]	Unit
Analog Switch							
Analog Signal Range[d]	V_{NO}, V_{NC}, V_{COM}		Full	0		V+	V
On-Resistance	r_{ON}	V+ = 2.7 V, V_{COM} = 0.2 V/1.5 V, I_{NO} I_{NC} = 100 mA	Room Full		0.85	1.2 1.3	Ω
r_{ON} Flatness	r_{ON} Flatness	V+ = 2.7 V, V_{COM} = 0 to V+, I_{NO}, I_{NC} = 100 mA	Room			0.2	
r_{ON} MatchFlat	Δr_{ON}		Room			0.06	
Switch Off Leakage Current	$I_{NO(off)}$, $I_{NC(off)}$	V+ = 3.3 V V_{NO}, V_{NC} = 0.3 V/3 V, V_{COM} = 3 V/0.3 V	Room Full	-1 -10		1 10	nA
	$I_{COM(off)}$		Room Full	-1 -10		1 10	
Channel-On Leakage Current	$I_{COM(on)}$	V+ = 3.3 V, V_{NO}, V_{NC} = V_{COM} = 0.3 V/3 V	Room Full	-1 -10		1 10	
Digital Control							
Input High Voltage	V_{INH}		Full	1.5			V
Input Low Voltage	V_{INL}		Full			0.5	
Input Capacitance[d]	c_{in}		Full		3.3		pF
Input Current[f]	I_{INL} or I_{INH}	V_{IN} = 0 or V+	Full	-1		1	μA
Dynamic Characteristics							
Turn-On Time	t_{ON}	V_{NO} or V_{NC} = 2.0 V, R_L = 300 Ω, C_L = 35 pF Figure 1 and 2	Room Full		28	51 55	ns
Turn-Off Time	t_{OFF}		Room Full		12	33 34	
Break-Before-Make Time	t_d		Room	1			
Charge Injection[d]	Q_{INJ}	C_L = 1 nF, V_{GEN} = 0 V, R_{GEN} = 0 Ω, Figure 3	Room		9		pC
Off-Isolation[d]	OIRR	R_L = 50 Ω, C_L = 5 pF, f = 1 MHz	Room		-64		dB
Crosstalk[d]	X_{TALK}		Room		-64		
NO, NC Off Capacitance[d]	$C_{NO(off)}$, $C_{NC(off)}$	V_{IN} = 0 or V+, f = 1 MHz	Room		30		pF
Channel-On Capacitance[d]	C_{ON}		Room		77		
Power Supply							
Power Supply Range	V+			1.5		3.6	V
Power Supply Current	I+	V+ = 3.6 V, V_{IN} = 0 or V+			0.01	1.0	μA

Notes:


a. Room = 25°C, Full = as determined by the operating suffix.
b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
c. Typical values are for design aid only, not guaranteed nor subject to production testing.
d. Guarantee by design, nor subjected to production test.
e. V_{IN} = input voltage to perform proper function.
f. Guaranteed by 3-V leakage testing, not production tested.

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


r_{ON} vs. V_{COM} and Single Supply Voltage

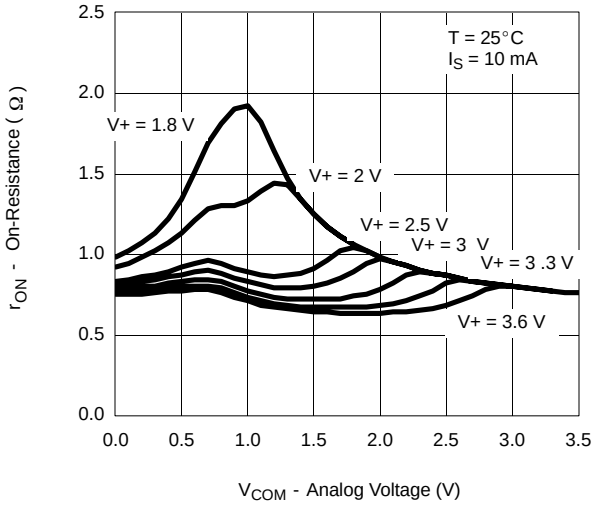


r_{ON} vs. Analog Voltage and Temperature

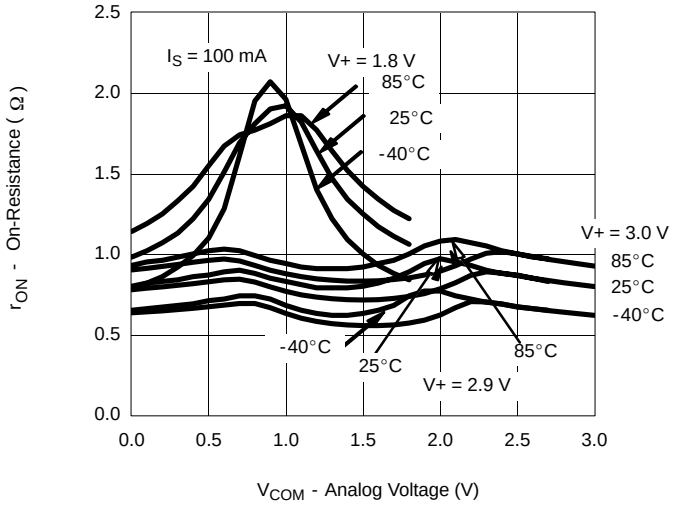


Supply Current vs. Temperature

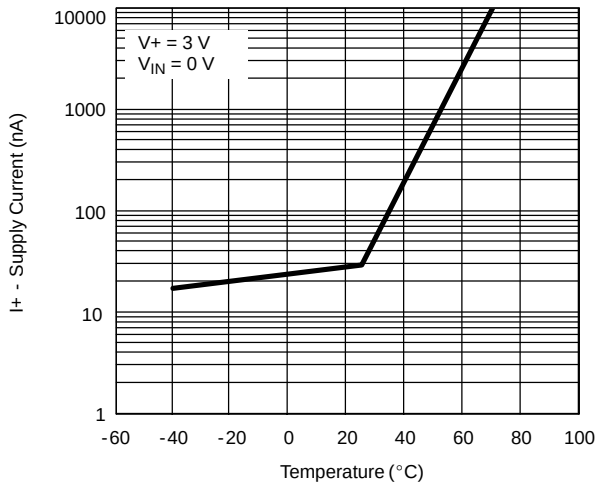


Supply Current vs. Input Switching Frequency

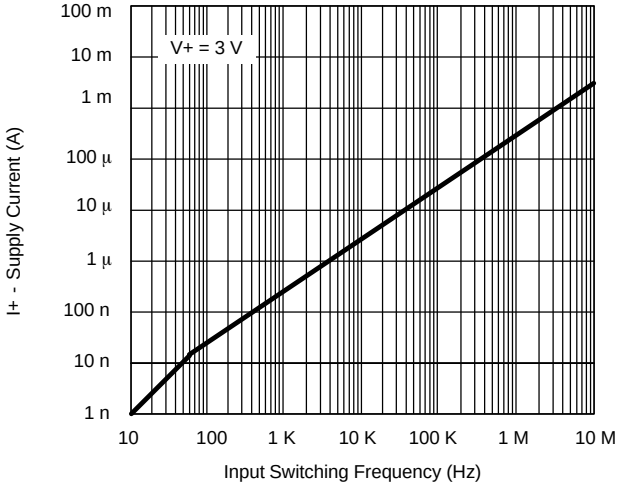

Leakage Current vs. Temperature

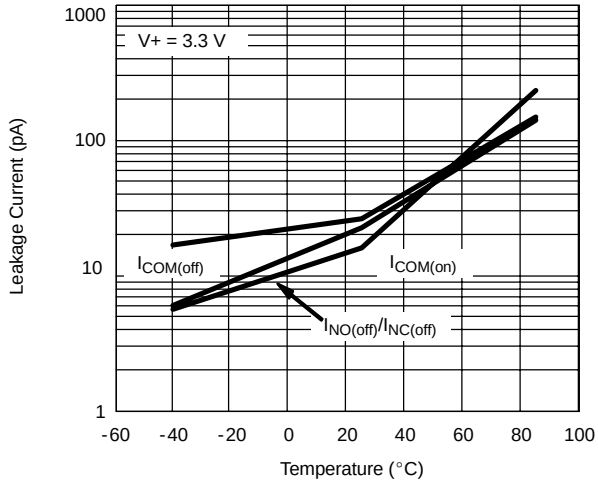


Leakage vs. Analog Voltage

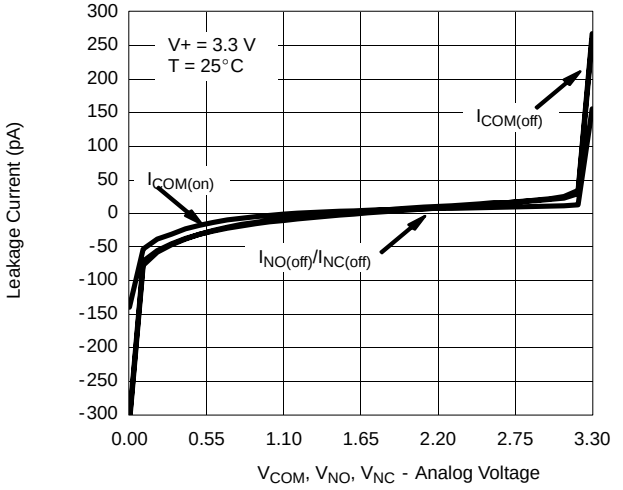


TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Switching Time vs. Temperature and Supply Voltage

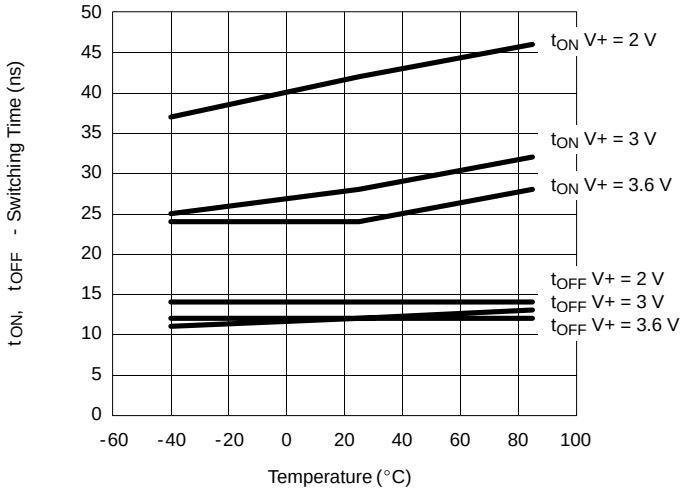

Insertion Loss, Off-Isolation, Crosstalk vs. Frequency

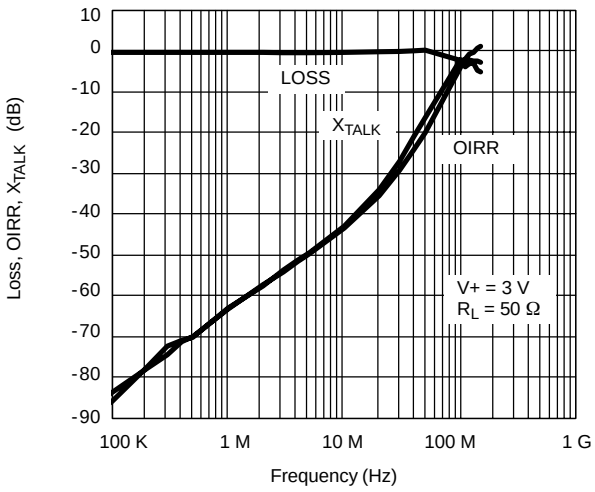

Charge Injection vs. Analog Voltage

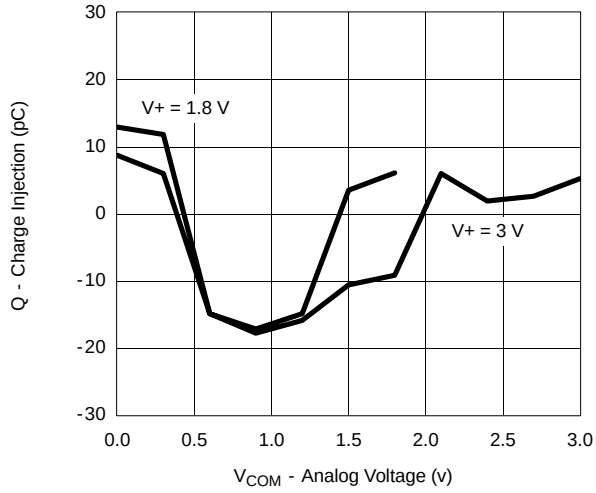

TEST CIRCUITS

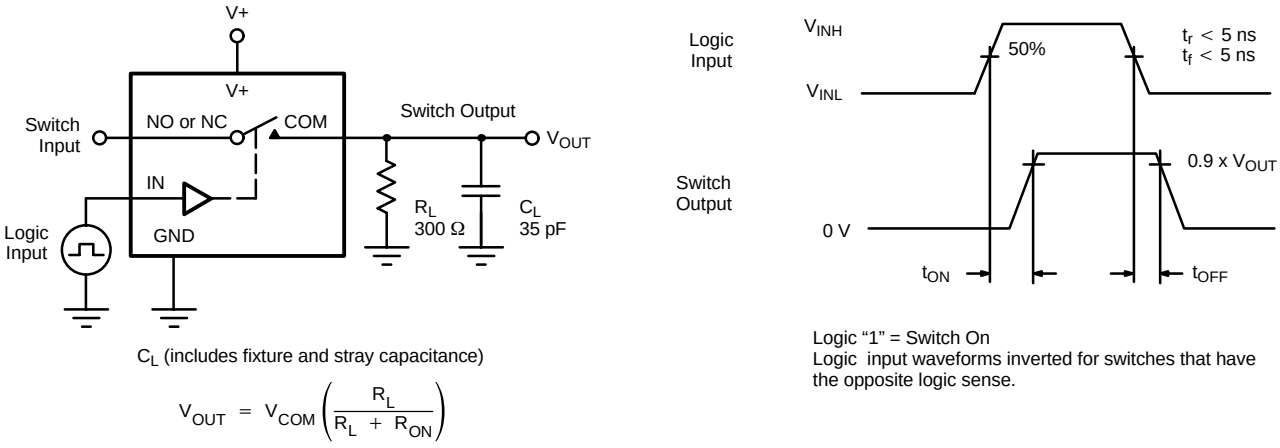


FIGURE 1. Switching Time

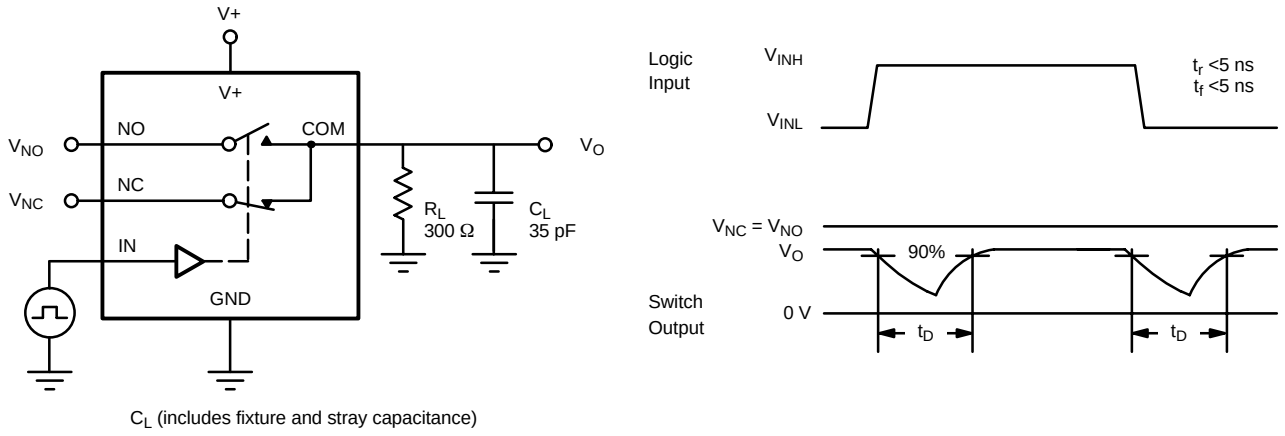


FIGURE 2. Break-Before-Make Interval

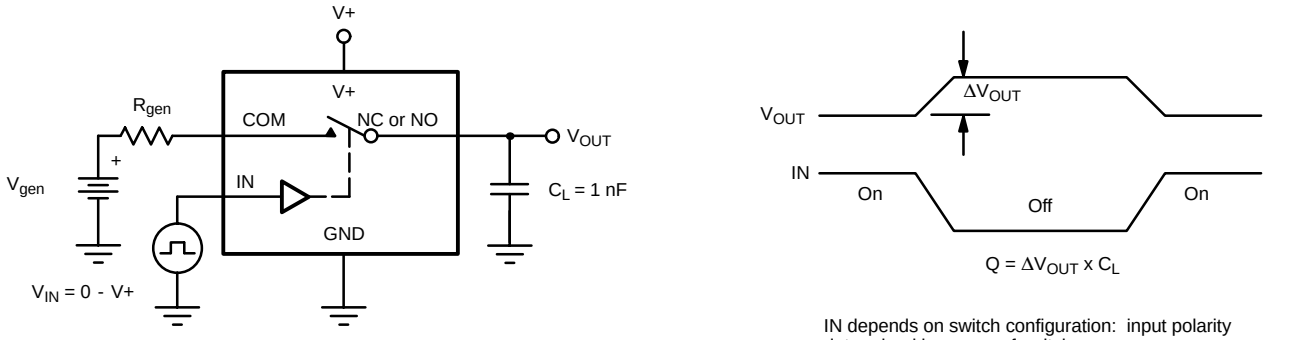


FIGURE 3. Charge Injection

TEST CIRCUITS

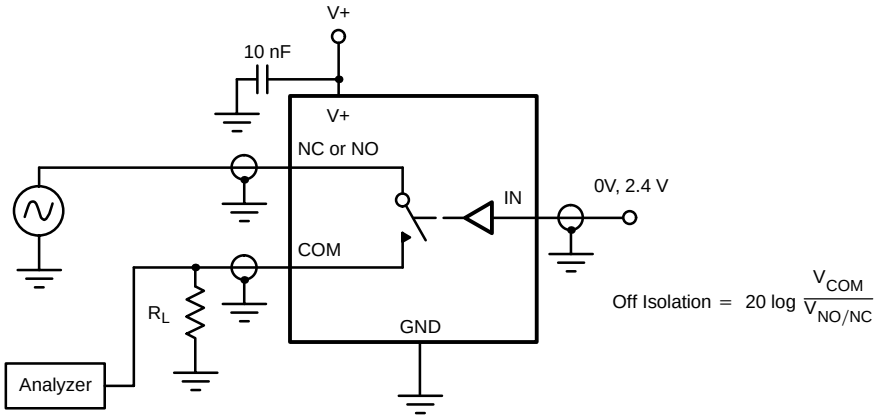


FIGURE 4. Off-Isolation

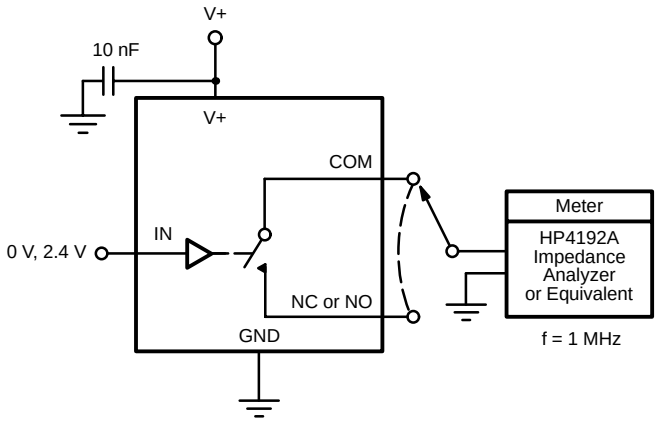


FIGURE 5. Channel Off/On Capacitance