Compact Technology

DI200S thru DI2010S

GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE **- 50** to **1000** Volts
FORWARD CURRENT **- 2.0** Amperes


FEATURES

- Rating to 1000V PRV
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- The plastic material has UL flammability classification 94V-0
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Polarity : As marked on Body
- Weight : 0.02 ounces, 0.38 grams
- Mounting position : Any

SDIP



SDIP		
DIM.	MIN.	MAX.
A	8.05	8.51
B	6.20	6.50
C	9.40	10.4
D	7.40	7.90
E	2.20	2.50
F	5.00	5.20
G	0.89	1.14
H	.076	.330
I	.220	.250
J	1.02	1.53
All Dimensions in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

PARAMETER	SYMBOL	DI 200S	DI 201S	DI 202S	DI 204S	DI 206S	DI 208S	DI 2010S	UNIT
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current @TA=40°C	I_F	2.0							A
I^2t Rating for fuisng (t< 8.3mS)	I^2t	10.4							A^2sec
Peak forward surge current, single sine-wave superim posed on rated load (JEDEC method)	I_{FSM}	60							A
Maximum instantaneous Forward Voltage Drop per element at 2.0A DC	V_F	1.1							V
Maximum DC Reverse Current @TA=25°C at Rated DC Blocking Voltage @TA=100°C	I_R	5.0 500							uA
Typical junction capacitance per leg(note1)	C_J	25							pF
Typical Thermal Resistance Per leg (note2)	$R_{\theta JA}$ $R_{\theta JC}$	40 15							°C/W
Operating & StorageTemperature Range	T_J&T_{STG}	-55 to +150							°C

note1. Measured at 1.0MHz and applied reverse voltage of 4.0 volts
note2. Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B with 0.5x0.5" (13x13mm) copper pads.

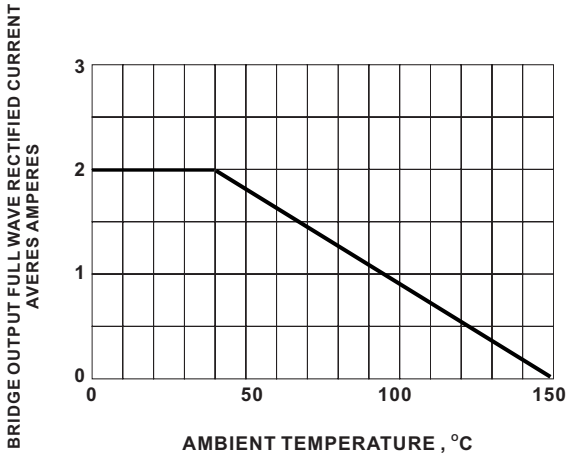


Fig.1 DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

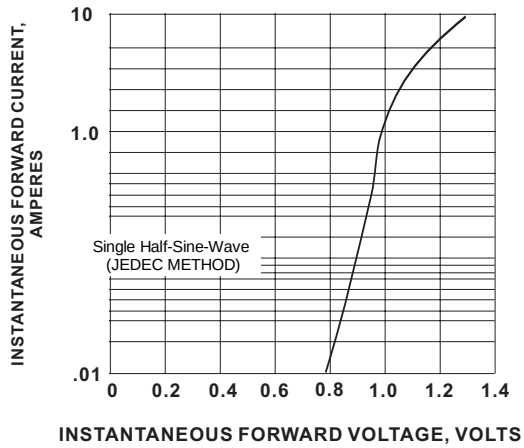


Fig.2 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

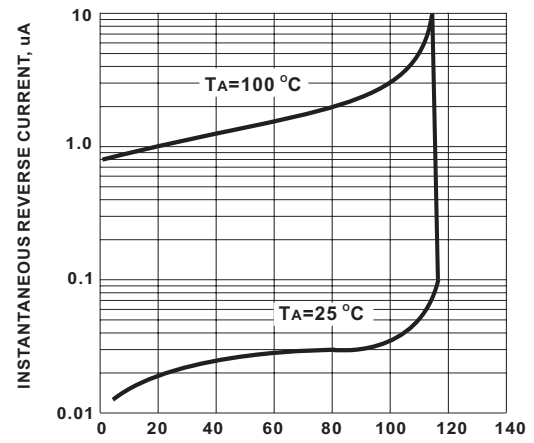


Fig.3 TYPICAL PEAK REVERSE CHARACTERISTICS

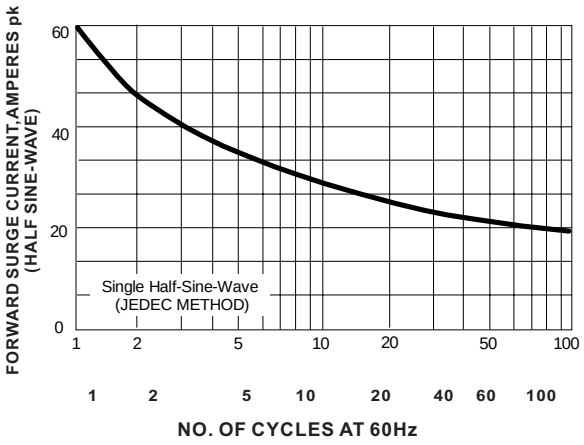


Fig.4 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT