
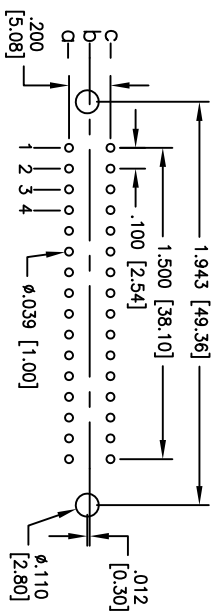
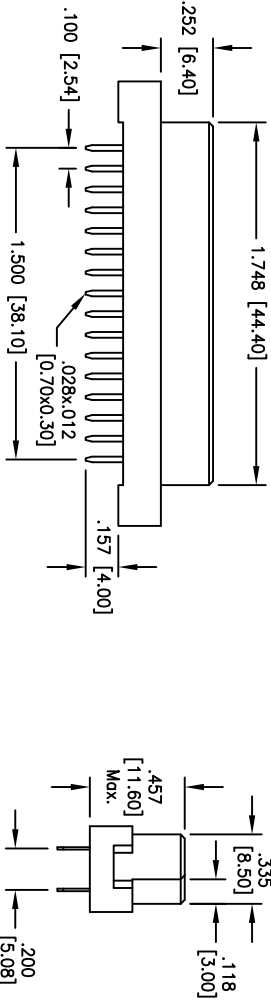


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/14/11	

APPROVED: _____
DATE: _____ TITLE: _____

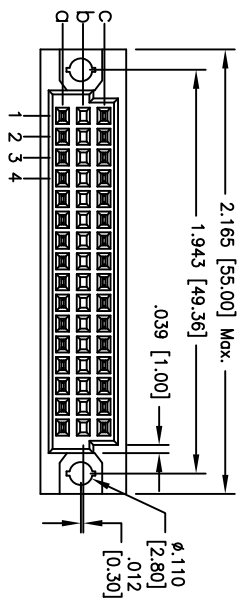

RECOMMENDED PCB LAYOUT

"X"	PLATING	CLASS
1	30 u" Gold	1
2	15 u" Gold	2
3	Gold Flash	3

SPECIFICATIONS:

Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Contacts: Phosphor Bronze
Plating:
Gold over Nickel underplate on contact area,
Tin over Copper underplate on solder tails.
(See chart for thickness)

Electrical:
Current rating: 2 Amps max
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +105°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
DIN TYPE C FEMALE, 32 PINS LOADED
3 ROW STRAIGHT, ROW A & C LOADED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
X .XX ± .10				ØX ± .10			
XX ± .020				ØXX ± .015			
XXX ± .015				ØXXX ± .010			
APPROVALS				DATE			
DRAWN AY				1/14/11			
CHECKED JL				1/14/11			
APPROVED							
SIZE		PART NO.		REV.			
X		DIN-32FS-S32-A1CX		-			
REF: 300368T		SCALE: NTS		SHEET 1 OF 1			