

6

5

4

3



2

1


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/26/10	

APPROVED: _____

DATE: _____ TITLE: _____

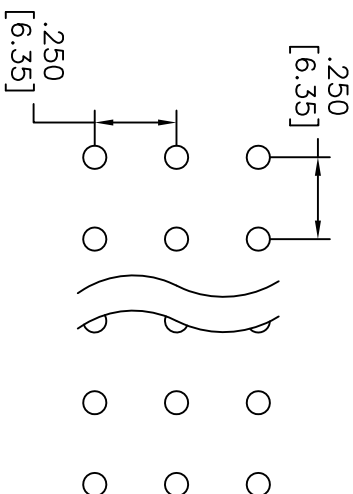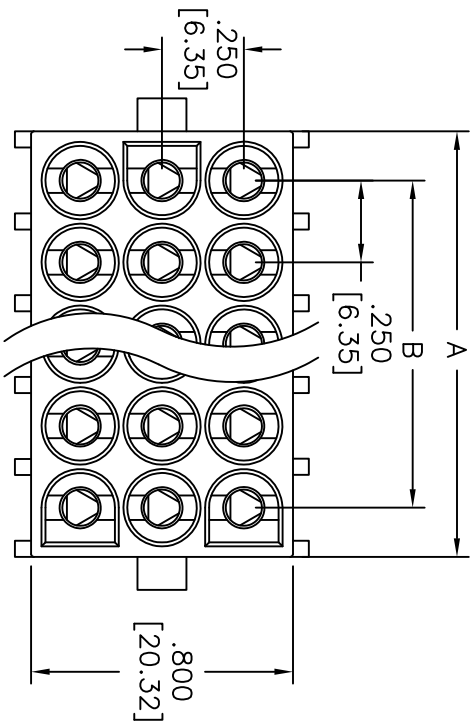

Recommended PCB Layout

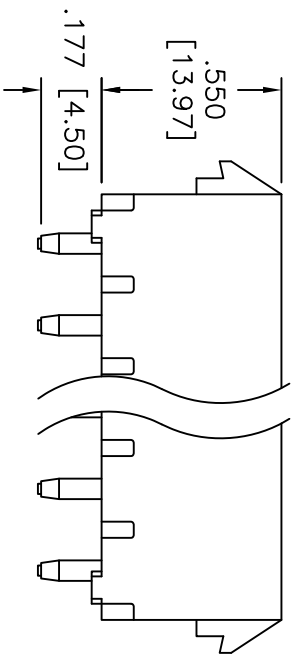

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Natural

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 11 Amps max.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 5000 VAC for 1 minute

Mechanical:

Temperature Rating:

Operating temperature: 0°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



Positions: 6, 9, 12, 15
A = .250 [6.35] X No. of Positions + .050 [1.27]
B = .250 [6.35] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES				TITLE			
.X	± .10	ØXX	± .10	WIRE TO BOARD, FEMALE, 6.35mm PITCH GOLD PLATED			
.XX	± .020	ØXXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	AY		10/26/10	ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
CHECKED	AW		10/26/10				
APPROVED							
SIZE				PART NO.			
X				DME-XX-S-SQ-G-V0			
REF: S00123T				SCALE: NTS			
				SHEET 1 OF 2			