

6

5

4

3

2





1

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/13/15	


APPROVED: _____

DATE: _____ TITLE: _____





D




D







C








C



B



B

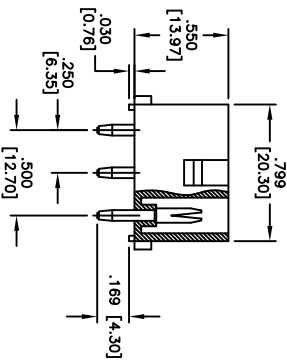

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Natural

Contacts: Phosphor Bronze

Plating: Gold Flash over 50u" Nickel underplate overall

Electrical:

Operating voltage: 600 VAC max

Current rating: 13 Amps max.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 5000 VAC for 1 minute

Mechanical:

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

WIRE TO BOARD, FEMALE, 6.35mm PITCH, WITHOUT
POLARIZING, GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	DY		11/13/15				
CHECKED							
APPROVED							
				SIZE	PART NO.		REV.
				X	DME-XX-S-SQ-V0-G		-
				REF:	SCALE: NTS	SHEET 1 OF 1	

A

A

6

5

4

3

2

1