

6

5

4

3


















2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/05/08	

APPROVED: _____

DATE: _____ TITLE: _____

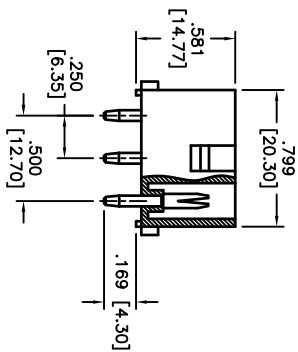

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

Electrical:

Operating voltage: 600 VAC max

Current rating: 13 Amps max.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 5000 VAC for 1 minute

Mechanical:

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO BOARD, FEMALE, 6.35mm PITCH
WITHOUT POLARIZING

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE				DATE			
DRAWN				DY				9/05/08			
CHECKED											
APPROVED											
SIZE				PART NO.				REV.			
X				DME-XX-S-SQ				-			
REF:				SCALE: NTS				SHEET 1 OF 2			