
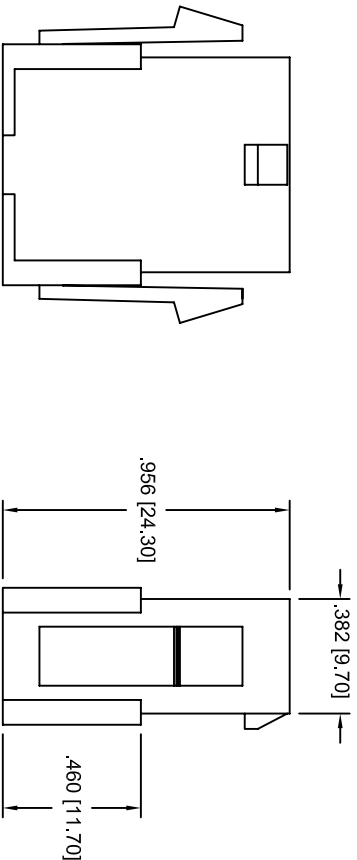


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/13/04	

APPROVED: _____


DATE: _____ TITLE: _____

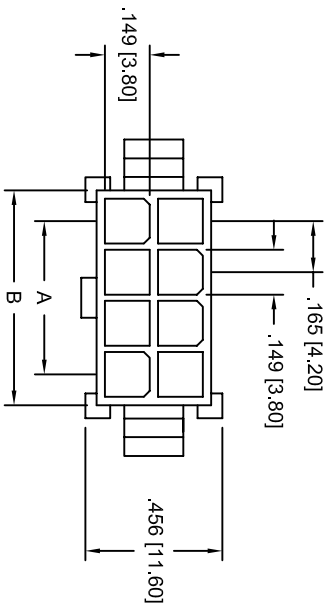

8 Position Shown




2 POSITION




8 POSITION




4 POSITION



10 POSITION




6 POSITION




12 POSITION




14 POSITION




20 POSITION




16 POSITION



22 POSITION



18 POSITION



24 POSITION

Position	A	B
2	4.2	5.6
3	8.4	14.0
4	4.2	9.8
5	16.8	22.4
6	8.4	14.0
8	12.6	18.2
10	16.8	22.4
12	21.0	26.6
14	25.2	30.8
16	29.4	35.0
18	33.6	39.2
20	37.8	43.4
22	42.0	47.6
24	46.2	51.8

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Natural

Electrical:

Operating voltage: 300 VAC max

Current rating: 5 Amps max

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +120°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO WIRE CONNECTOR HOUSING

FEMALE, 4.2MM PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES EXCEPT AS NOTED INCHES		DRAWN		SS		10/13/04		SIZE		PART NO.		REV.	
.X ± .10		ØX ± .10		HOLD		DATE		X		DMH-F-XX		-	
.XX ± .020		ØXX ± .015		CHECKED									
.XXX ± .015		ØXXX ± .010		APPROVED									
APPROVALS								REF:		SCALE: NTS		SHEET 1 OF 1	