

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-	9840	RELEASED	11/11/09	

APPROVED: _____

DATE: _____ TITLE: _____

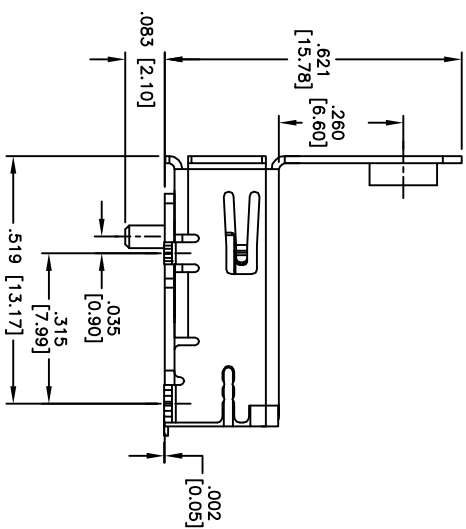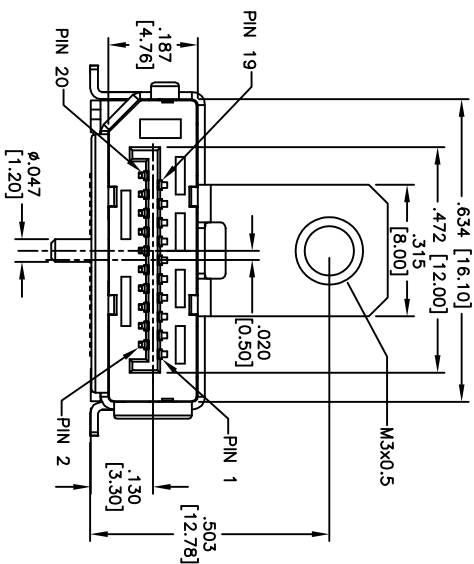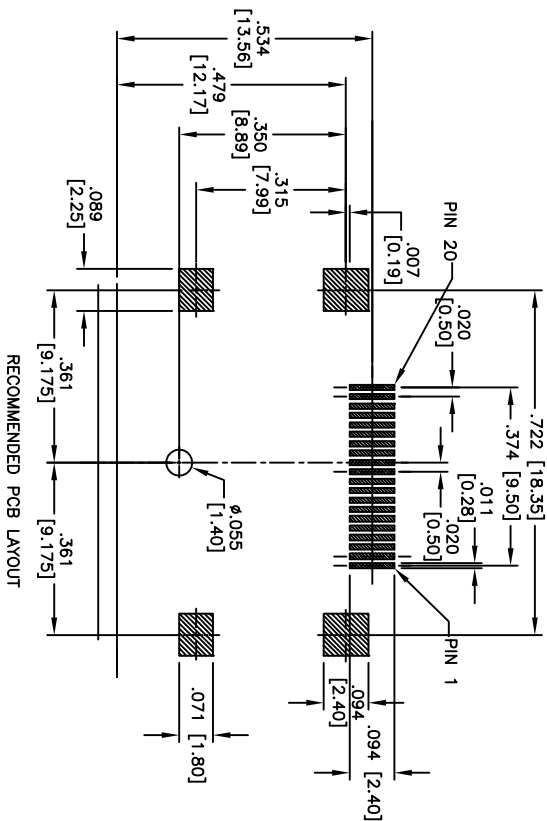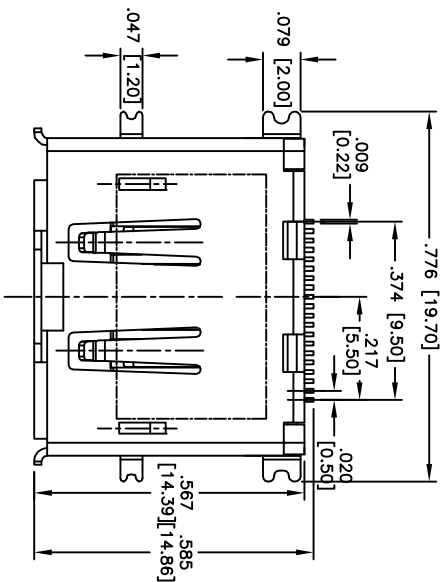

SPECIFICATIONS:

Material:

Housing: Thermal Plastic, rated UL 94V-0

Contact: Copper Alloy

Shell: Brass, nickel plated

Plating:

15u" Gold over Nickel underplate overall

Electrical:

Operating voltage: 40 VAC

Current rating: 0.5 Amps min

Withstanding Voltage: 500V AC for 1 minute

Insulation Resistance: 100M ohms min.

Conduct Resistance: 30 ohms max.

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

DISPLAYPORT RECEPTACLE, RA, SMT TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
.XXX	± .015	ØXXX	± .010	.XXX	± .010	ØXXX	± .010
APPROVALS				DATE			
DRAWN	DY		11/11/09				
CHECKED							
APPROVED							
				SIZE	PART NO.	REV.	
				X	DPC-F-S-RA-TSMT-MF-15	-	
				REF:	S000137	SCALE: NTS	SHEET 1 OF 1