

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/18/05	

6

5

4





3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

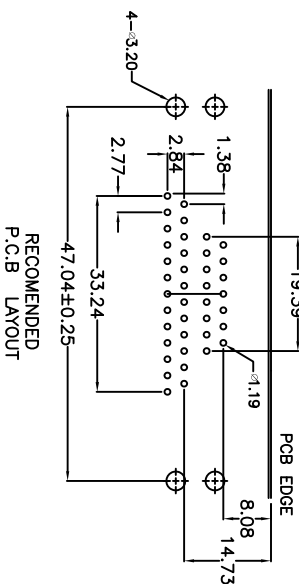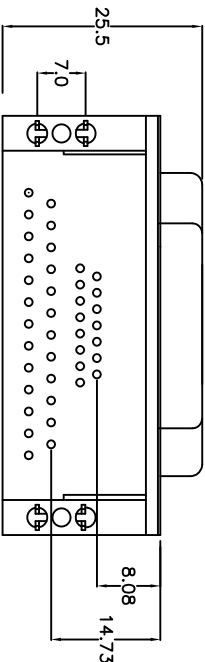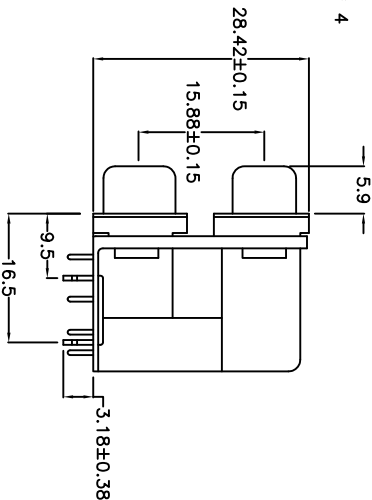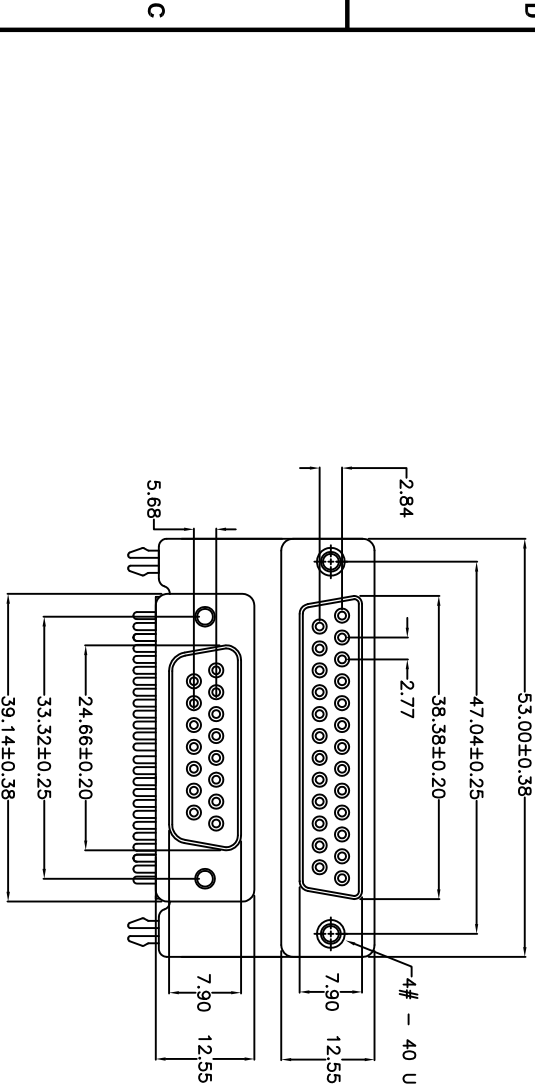

RECOMMENDED
P.C.B LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Nickel plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL PORT D-SUB, 25P FEMALE OVER 15P FEMALE, .625" PORT SPACING

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				HOLES							
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	SS	7/18/05									
CHECKED											
APPROVED											
TITLE											
DUAL PORT D-SUB, 25P FEMALE OVER 15P FEMALE, .625" PORT SPACING											
909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710											
ADAM TECH											
SIZE		PART NO.		REV.							
X		DPD-25/15-00-C3		-							
REF:		SCALE: NTS		SHEET 1 OF 1							

A

B

C

D

A

B

C

D

6

5

4

3

2

1