

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/04	

6

5

4

3



2

1



APPROVED: _____

DATE: _____ TITLE: _____

D

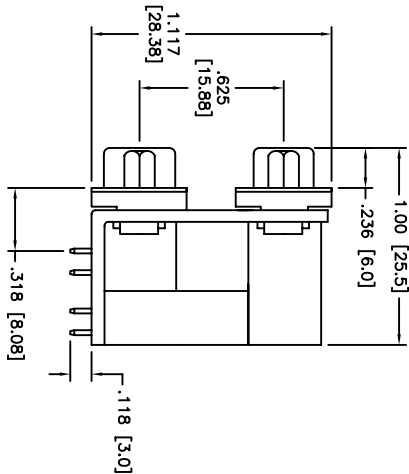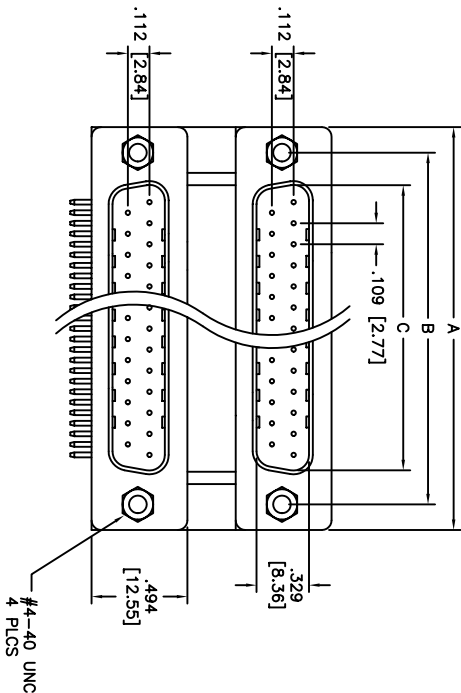

C

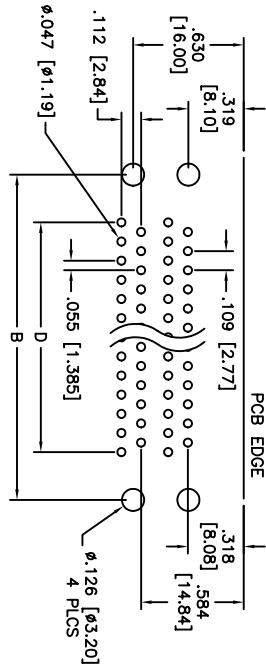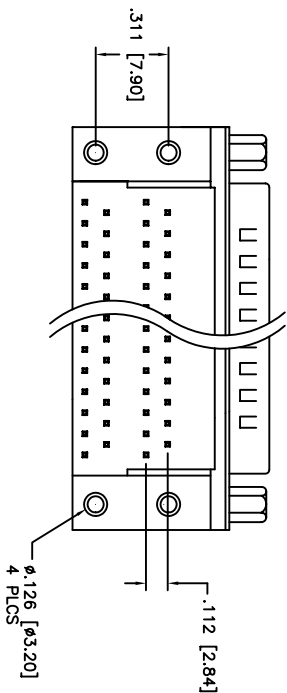

B

POSITIONS	Plug Dimensions			
	A	B	C	D
9	1.212 [30.80]	.984 [24.99]	.666 [16.92]	.436 [11.08]
15	1.541 [39.14]	1.312 [33.32]	.994 [25.25]	.763 [19.39]
25	2.086 [53.00]	1.852 [47.04]	1.534 [38.96]	1.308 [33.24]
37	2.729 [69.32]	2.500 [63.50]	2.182 [55.42]	1.963 [49.86]

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Zinc plated

Plating:

5u" Gold nom over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

A

A

B

C

D

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

DUAL PORT D-SUB, RIGHT ANGLE

MALE / MALE, XX POSITION, .625" PORT

SIZE

DPD-XX-11-C1-JS

REV.

DRAWN	SS	11/22/04
CHECKED		
APPROVED		

REF:

SCALE:

NTS

SHEET

1 OF 1

6

5

4

3

2

1