


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/04	

APPROVED: _____

DATE: _____ TITLE: _____


D

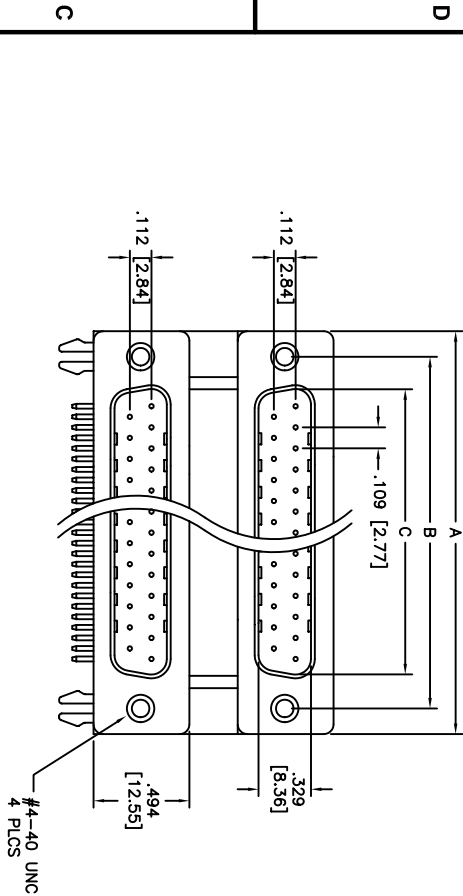

PORT SPACING	Dimensions	
	E	F
A	.900 [22.86]	1.392 [35.36]
B	.750 [19.05]	1.242 [31.55]
C	.625 [15.88]	1.117 [28.38]


D

C

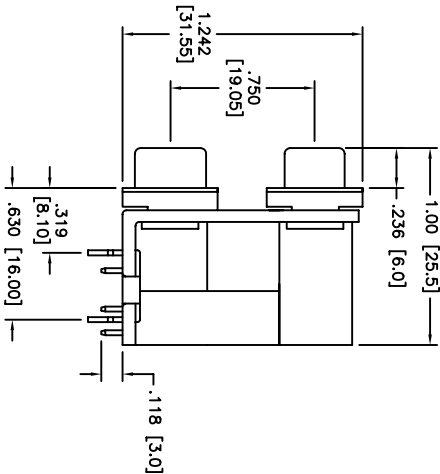

C

B

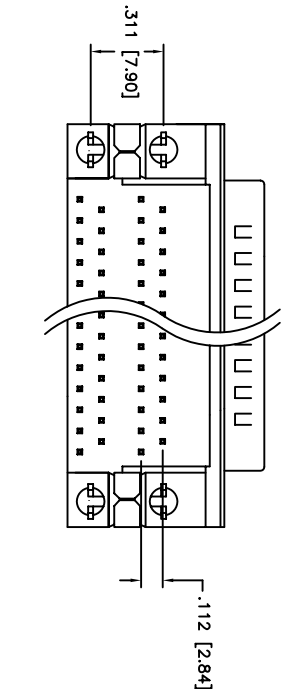

B

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Zinc plated

Plating:

5u" Gold nom over Nickel underplate overall

Electical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

B

POSITIONS	Plug Dimensions			
	A	B	C	D
9	1.212 [30.80]	.984 [24.99]	.666 [16.92]	.436 [11.08]
15	1.541 [39.14]	1.312 [33.32]	.994 [25.25]	.763 [19.39]
25	2.086 [53.00]	1.852 [47.04]	1.534 [38.96]	1.308 [33.24]
37	2.729 [69.32]	2.500 [63.50]	2.182 [55.42]	1.963 [49.86]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

A

A

TITLE
DUAL PORT D-SUB, RIGHT ANGLE
MALE / MALE, XX POSITION

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				DRAWN				SS				11/22/04				SIZE				PART NO.				DPD-XX-11-X3				REV.				-			
INCHES				Holes				DATE				X				SCALE: NTS				SHEET 1 OF 1															
.X ± .10				ØXX ± .10																															
.XX ± .020				ØXXX ± .015																															
.XXX ± .015				ØXXX ± .010																															
APPROVALS																																			
CHECKED																																			
APPROVED																																			