

HiPerFRED²

preliminary


$$\begin{aligned} V_{RRM} &= 200V \\ I_{FAV} &= 2 \times 120A \\ t_{rr} &= 55ns \end{aligned}$$

High Performance Fast Recovery Diode
Low Loss and Soft Recovery
Parallel legs

Part number

DPF240X200NA


Backside: isolated

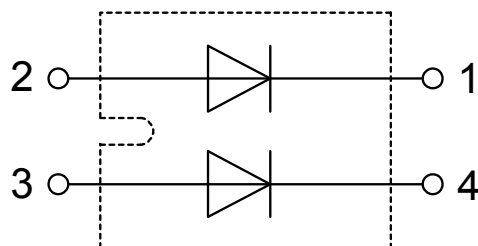 E72873


Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{rm} -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{rm} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

Package: SOT-227B (minibloc)


- Isolation Voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Base plate: Copper internally DCB isolated
- Advanced power cycling

Fast Diode				Ratings				
Symbol	Definition	Conditions		min.	typ.	max.	Unit	
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				200	V	
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				200	V	
I _R	reverse current, drain current	V _R = 200 V	T _{VJ} = 25°C			10	μA	
		V _R = 200 V	T _{VJ} = 150°C			0.5	mA	
V _F	forward voltage drop	I _F = 120 A	T _{VJ} = 25°C			1.19	V	
		I _F = 240 A				1.51	V	
		I _F = 120 A	T _{VJ} = 150°C			1.06	V	
		I _F = 240 A				1.48	V	
I _{FAV}	average forward current	T _C = 80°C	T _{VJ} = 150°C			120	A	
		rectangular d = 0.5						
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 150°C		0.65	V	
r _F	slope resistance					3.4	mΩ	
R _{thJC}	thermal resistance junction to case					0.4	K/W	
R _{thCH}	thermal resistance case to heatsink				0.10		K/W	
P _{tot}	total power dissipation	T _C = 25°C				310	W	
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; V _R = 0 V		T _{VJ} = 45°C		1.20	kA	
C _J	junction capacitance	V _R = 100 V f = 1 MHz		T _{VJ} = 25°C	328		pF	
I _{RM}	max. reverse recovery current	} I _F = 120 A; V _R = 100 V -di _F /dt = 200 A/μs		T _{VJ} = 25°C	6		A	
				T _{VJ} = 125°C	16		A	
t _{rr}	reverse recovery time			T _{VJ} = 25°C	55		ns	
				T _{VJ} = 125°C	85		ns	

preliminary

Package SOT-227B (minibloc)				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal				150	A
T_{VJ}	virtual junction temperature			-40		150	°C
T_{op}	operation temperature			-40		125	°C
T_{stg}	storage temperature			-40		150	°C
Weight					30		g
M_D	mounting torque			1.1		1.5	Nm
M_T	terminal torque			1.1		1.5	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	10.5	3.2			mm
$d_{Spb/Apb}$		terminal to backside	8.6	6.8			mm
V_{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	3000			V
		t = 1 minute		2500			V

Product Marking

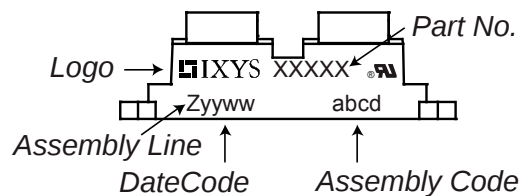

Part number


D = Diode
 P = HiPerFRED
 F = ultra fast
 240 = Current Rating [A]
 X = Parallel legs
 200 = Reverse Voltage [V]
 NA = SOT-227B (minibloc)

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DPF240X200NA	DPF240X200NA	Tube	10	512342


Similar Part	Package	Voltage class
DSEI2x121-02A	SOT-227B (minibloc)	200

Equivalent Circuits for Simulation

* on die level

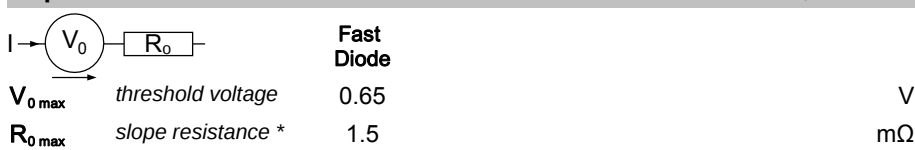 $T_{VJ} = 150\text{ °C}$ 

Outlines SOT-227B (minibloc)

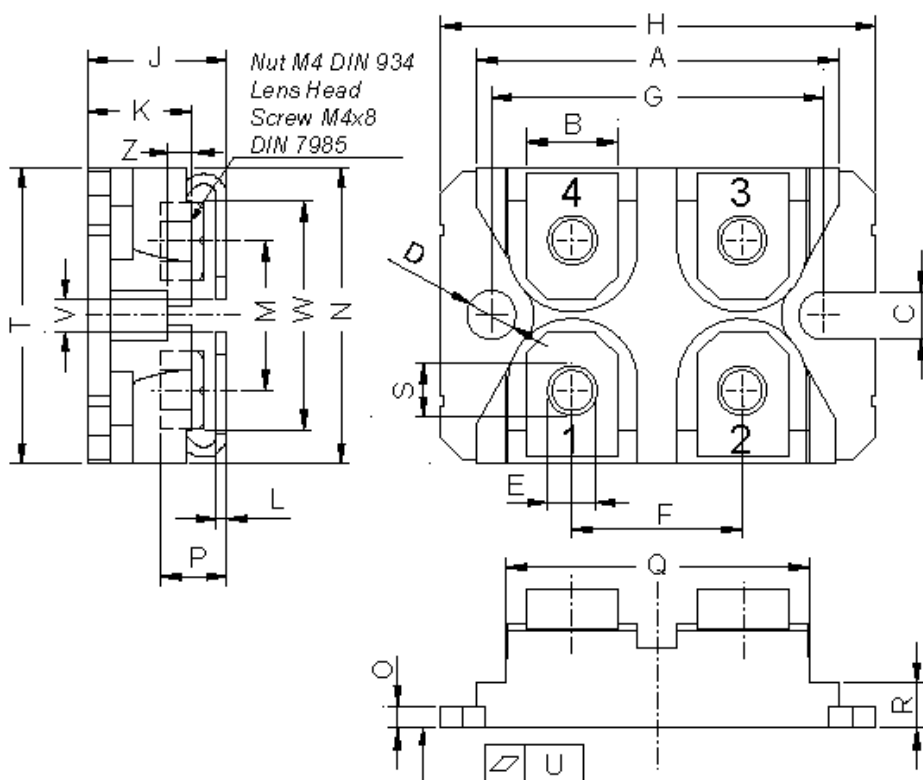

Dim.	Millimeter		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.167
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

