RECTRON SEMICONDUCTOR
TECHNICAL SPECIFICATION

DS12WV THRU DS120WV

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 20 to 200 Volts CURRENT 1.0 Ampere

FEATURES

* Metal silicon junction, majority carrier conduction
* For surface mounted applications
* Low power loss, high efficiency
* High forward surge current capability
* High surge capabitity
* High reliability
* P/N suffix V means AEC-Q 101 qualified, e.g:DS12WV
* P/N suffix V means Halogen-free

MECHANICAL DATA

* Case: Molded plastic
* Epoxy: Device has UL flammability classification 94V-O
* Lead: MIL-STD-202E method 208C guaranteed
* Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Resistive or inductive load.

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View
Marking Code: DS12W ---S12
DS14W ---S14
DS16W ---S16
DS18W ---S18
DS110W ---S110
DS112W ---S112
DS115W ---S115
DS120W ---S120

Weight：17mg，0.0006 oz
Simplified outline SOD-123F(L) and symbol

MAXIMUM RATINGS (@ TA=25 °C unless otherwise noted)

RATINGS	SYMBOL	DS12W	DS14W	DS16W	DS18W	DS110W	DS112W	DS115W	DS120W	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	Volts
Maximum RMS Voltage	V_{RMS}	14	28	42	56	70	84	105	140	Volts
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	Volts
Maximum Average Forward Rectified Current	I_O	1.0								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	40								Amps
Typical Current Square Time	I^2T	6.64								A^2S
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	115								°C/W
Typical Junction Capacitance (Note 2)	C_J	110				80				pF
Operating Temperature Range	T_J	-55 to + 150								°C
Storage Temperature Range	T_{STG}	-55 to + 150								°C

ELECTRICAL CHARACTERISTICS(@TA=25 °C unless otherwise noted)

CHARACTERISTICS		SYMBOL	DS12W	DS14W	DS16W	DS18W	DS110W	DS112W	DS115W	DS120W	UNITS
Maximum Instantaneous Forward Voltage at 1.0A DC		V_F	.55		.70		.85				Volts
Maximum Average Reverse Current	@T_A = 25°C	I_R	0.3				0.2		0.1		mA
at Rated DC Blocking Voltage	@T_A = 150°C		20				10		5		mA

NOTES : 1. Thermal Resistance : Mounted on PCB.
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

2020-11/01
REV:O

RATING AND CHARACTERISTICS CURVES (DS12WV THRU DS120WV)

Fig.1 Forward Current Derating Curve

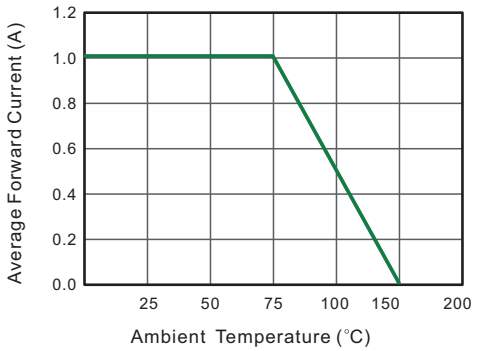


Fig.2 Typical Reverse Characteristics

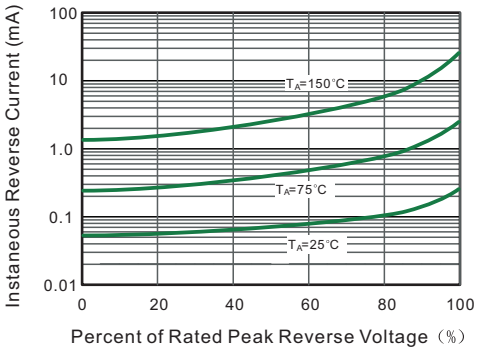


Fig.3 Typical Forward Characteristic

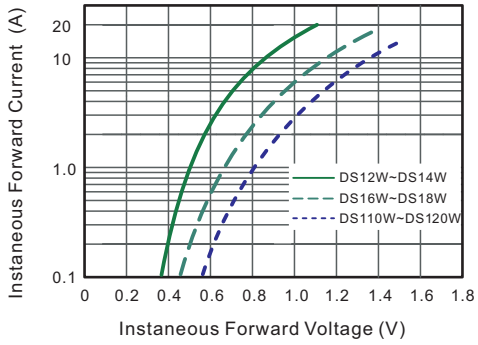


Fig.4 Typical Junction Capacitance

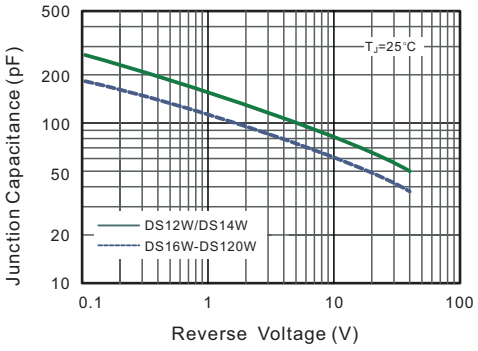


Fig.5 Maximum Non-Repetitive Peak Forward Surage Current



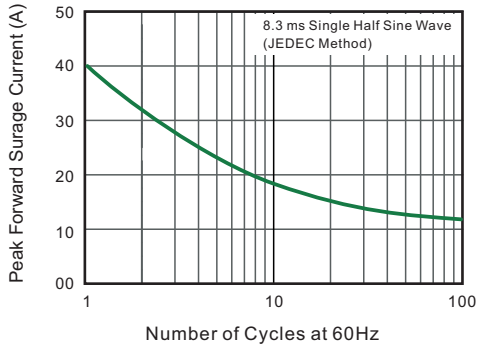



Fig.6- Typical Transient Thermal Impedance

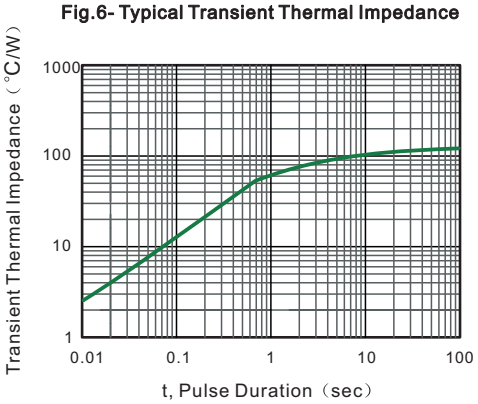


PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

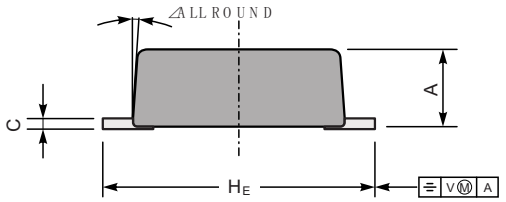



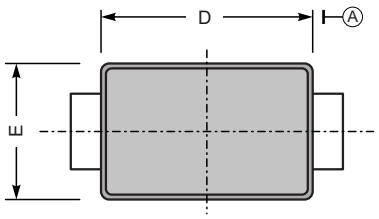


Top View



Bottom View

UNIT		A	C	D	E	e	g	H_E	∠
mm	max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	7°
	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	max	43	7.9	114	75	43	35	150	
	min	35	4.7	102	67	31	28	138	


The recommended mounting pad size

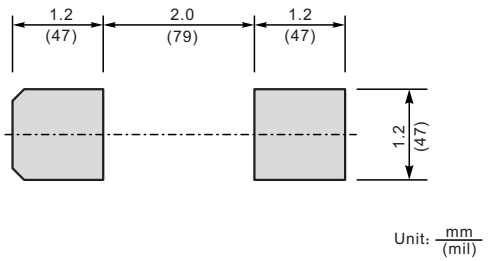


Marking

Type number	Marking code
DS12W	S12
DS14W	S14
DS16W	S16
DS18W	S18
DS110W	S110
DS112W	S112
DS115W	S115
DS120W	S120

• **Recommended condition of flow soldering**

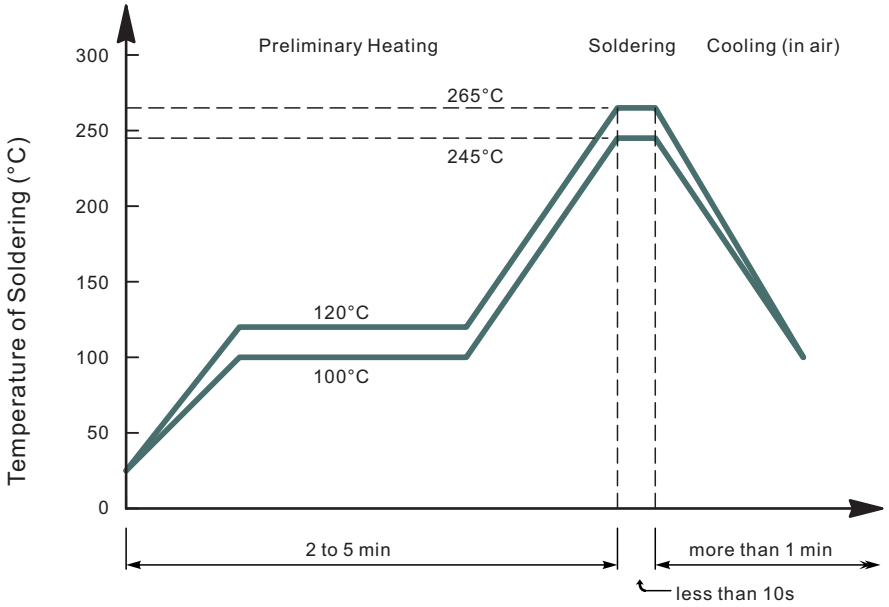

• **Recommended condition of reflow soldering**

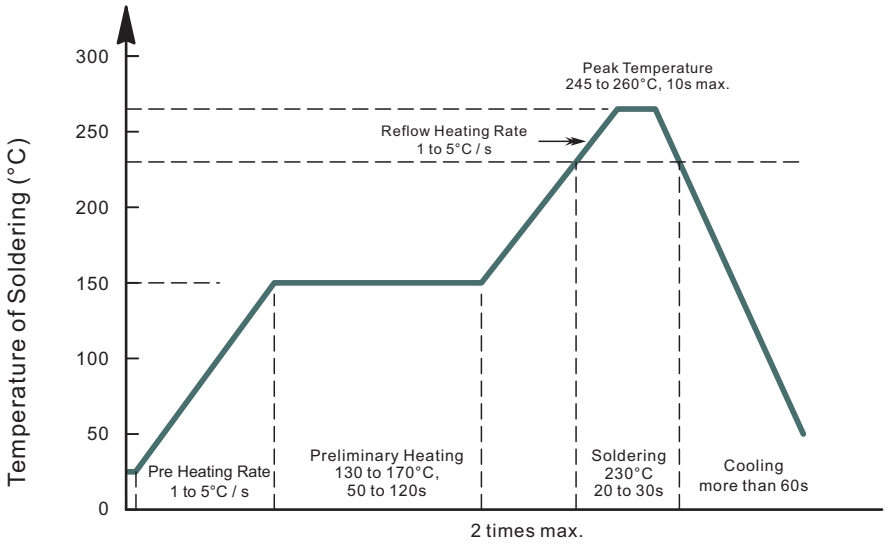

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters; time length of peak temperature (longer), time length of soldering (longer), thickness of solder paste (thicker)

• **Condition of hand soldering**
Temperature: 350°C
Time: 3s max.
Times: one time

• **Remark:**
Lead free solder paste (96.5Sn/3.0Ag/0.5Cu)

PACKAGING OF DIODE AND BRIDGE RECTIFIERS

REEL PACK

PACKAGE	PACKING CODE	EA PER REEL	EA PER INNER BOX	COMPONENT SPACE (mm)	TAPE SPACE (mm)	REEL DIA (mm)	CARTON SIZE (mm)	EA PER CARTON	GROSS WEIGHT(Kg)
SOD-123F(L)	-W/T	3,000	15,000	---	---	178	390*205*310	120,000	6.964

DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.