DSC8003 Series



1.8~3.3V Programmable Low-Power Precision CMOS Oscillator


General Description

The DSC8003 is a programmable silicon MEMS based CMOS oscillator offering excellent jitter and stability performance over a wide range of supply voltages and temperatures. The device operates from 1 to 150MHz in increments of 100Hz (up to four decimal point resolution) with supply voltages between 1.8 to 3.3 Volts and extended temperatures from -40ºC to 105ºC. The DSC8003 has the same functionality and performance as the DSC8001 but with greater output drive (C_L=25pf).

The DSC8003 incorporates an all silicon resonator that is extremely robust and nearly immune to stress related fractures, common to crystal based oscillators. Without sacrificing the performance and stability required of today's systems, a crystal-less design allows for a higher level of reliability, making the DSC8003 ideal for rugged, industrial, and portable applications where stress, shock, and vibration can damage quartz crystal based systems.

Available in industry standard packages, the DSC8003 can be "dropped-in" to the same PCB footprint as standard crystal oscillators.

Block Diagram

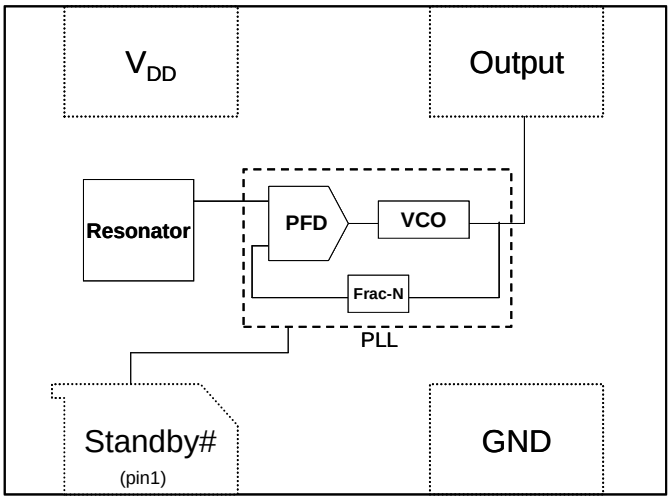

Features

- Frequency Range: Programmable from 1 to 150MHz
- Exceptional Stability over Temperature
  - ±20 PPM , ±25 PPM, ±50 PPM
- Operating voltage
  - 1.71 to 3.60V
- Operating Temperature Range
  - Ext. Industrial -40ºC to 105ºC
  - Industrial -40ºC to 85ºC
  - Ext. Commercial -20ºC to 70ºC
- Low Operating and Standby Current
  - 7mA Operating (40MHz)
  - 15uA Standby
- Ultra Miniature Footprint
  - 2.5 x 2.0 x 0.85 mm
  - 3.2 x 2.5 x 0.85 mm
  - 5.0 x 3.2 x 0.85 mm
  - 7.0 x 5.0 x 0.85 mm
- Excellent shock and Vibration Resistance
- Lead Free, RoHS & Reach SVHC Compliant

Benefits

- Pin for pin "drop in" replacement for industry standard oscillators
- Semiconductor level reliability, significantly higher than quartz
- Frequency Resolution to 4 decimals
- Short mass production lead-times
- Longer Battery Life / Reduced Power
- Compact Plastic package
- Cost Effective

Applications


- Mobile Applications
- Consumer Electronics
- Portable Electronics
- CCD Clock for VTR Cameras
- Low Profile Applications
- Industrial

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use.

Absolute Maximum Ratings[1]

Item	Min.	Max	Unit	Condition
Supply Voltage	-0.3	+4.0	V	
Input Voltage	-0.3	VDD+0.3	V	
Junction Temp	-	+150	°C	
Storage Temp	-55	+150	°C	
Soldering Temp	-	+260	°C	40 sec max.
ESD **HBM** **MM** **CDM**	-	 4000 200 1500	V	

Ordering Code

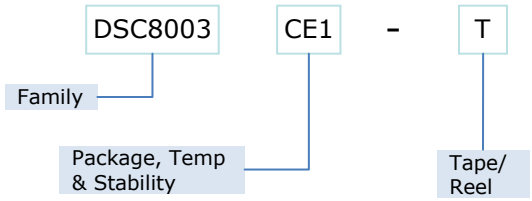

* See Ordering Information for details

Recommended Operating Conditions

Parameter	Symbol	Range
Supply Voltage	V_{DD}	1.71 – 3.60V
Output Load	Z_L	R>10KΩ, C≤25pF
Operating Temperature **Option 1** **Option 2** **Option 3**	T	 -40 to +105 °C -40 to +85 °C -20 to +70 °C

Specifications (VDD = 1.8 to 3.3v) T_A=85°C unless otherwise specified

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Frequency	f_0	Single Frequency	1		150	MHz
Frequency Tolerance	Δf	Includes frequency variations due to initial tolerance, temperature and power supply voltage			±10,±25,±50	ppm
Aging	Δf	1 year @25°C			±5	ppm
Supply Current, standby	I_{DD}	T=25°C			15	uA
Output Startup Time[2]	t_{SU}	T=25°C		1.0	1.3	ms
Output Disable Time	t_{DA}			20	100	ns
Output Duty Cycle	SYM		45		55	%
Input Logic Levels **Input logic high** **Input logic low**	 V_{IH} V_{IL}		 0.75*V_{DD} -		 - 0.25* V_{DD}	Volts

Notes:
1. Absolute maximum ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated beyond these limits.
2. t_{SU} is time to stable output frequency after V_{DD} is applied. t_{SU} and t_{EN} (after EN is asserted) are identical values.
3. Measured over 50k clock cycles.

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use.

VDD = 1.8v

Parameter	Symbol	Condition		Min	Typ	Max	Unit
Supply Current, no load	I_{DD}	C_L=0p R_L=∞ T=25°C	1MHz 27MHz 70MHz 150MHz		5.7 6.4 7.7 10.0	6.0 6.8 8.0 11.0	mA
Output Logic Levels **Output logic high** **Output logic low**	 V_{OH} V_{OL}	 -6mA 6mA		 0.8*V_{DD} -		 - 0.2*V_{DD}	Volts
Output Transition time **Rise Time** **Fall Time**	 t_R t_F	 C_L=25pF; T=25°C 20%/80%*V_{DD}			 1.5 1.2	 3 3	ns
Output Transition time **Rise Time** **Fall Time**	 t_R t_F	 C_L=25pF; T=25°C 10%/90%*V_{DD}			 2.6 1.9	 4 4	ns
Period Jitter	J_p	F = 100MHz[3]			10	15	ps rms

VDD = 2.5v


Parameter	Symbol	Condition		Min	Typ	Max	Unit
Supply Current, no load	I_{DD}	C_L=0p R_L=∞ T=25°C	1MHz 27MHz 70MHz 150MHz		5.7 6.7 8.4 11.4	6.0 7.1 8.8 12.7	mA
Output Logic Levels **Output logic high** **Output logic low**	 V_{OH} V_{OL}	 -6mA 6mA		 0.8*V_{DD} -		 - 0.2*V_{DD}	Volts
Output Transition time **Rise Time** **Fall Time**	 t_R t_F	 C_L=25pF; T=25°C 20%/80%*V_{DD}			 1.1 0.9	 2 2	ns
Output Transition time **Rise Time** **Fall Time**	 t_R t_F	 C_L=25pF; T=25°C 10%/90%*V_{DD}			 1.9 1.5	 3.5 3	ns
Period Jitter	J_p	F = 100MHz[3]			5	10	ps rms

VDD = 3.3v

Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit
Supply Current, no load	I_{DD}	C_L=0p R_L=∞ T=25°C	1MHz 27MHz 70MHz 150MHz		5.7 7.0 9.1 13.1	6.0 7.4 9.6 15.0	mA
Output Logic Levels **Output logic high** **Output logic low**	 V_{OH} V_{OL}	 -6mA 6mA		 0.9*V_{DD} -		 - 0.1*V_{DD}	Volts
Output Transition time **Rise Time** **Fall Time**	 t_R t_F	 C_L=25pF; T=25°C 20%/80%*V_{DD}			 1.1 0.9	 2 2	ns
Output Transition time **Rise Time** **Fall Time**	 t_R t_F	 C_L=25pF; T=25°C 10%/90%*V_{DD}			 1.5 1.5	 3 3	ns
Period Jitter	J_p	F = 100MHz[3]			5	10	ps rms

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use.


Output Waveform

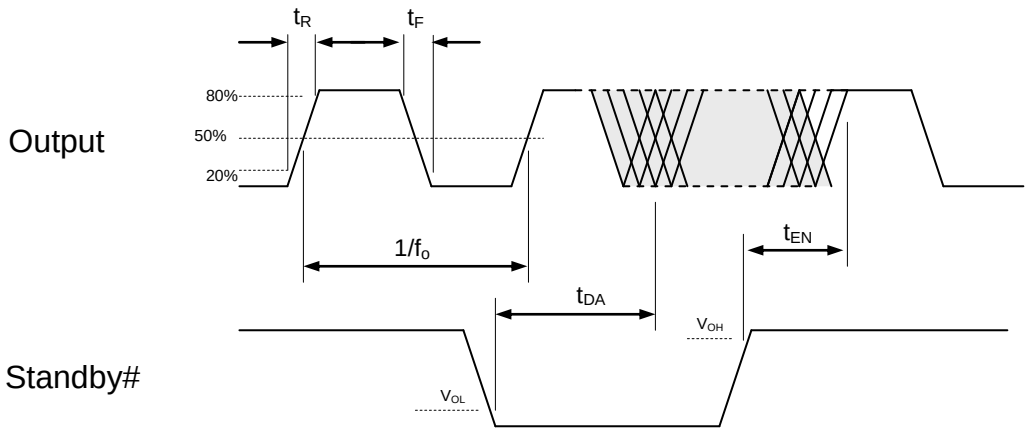

Standby Function


Standby# (pin 1)	Output (pin 3)
Hi Level	Output ON
Open (no connect)	Output ON
Low Level	High Impedance

Test Circuit

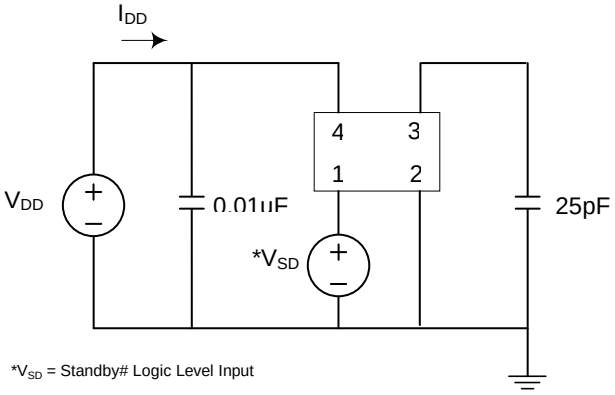


All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use.

Board Layout (recommended)

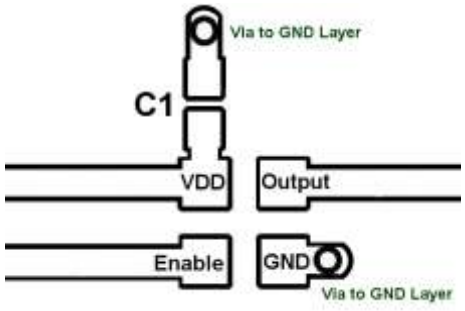

Solder Reflow Profile

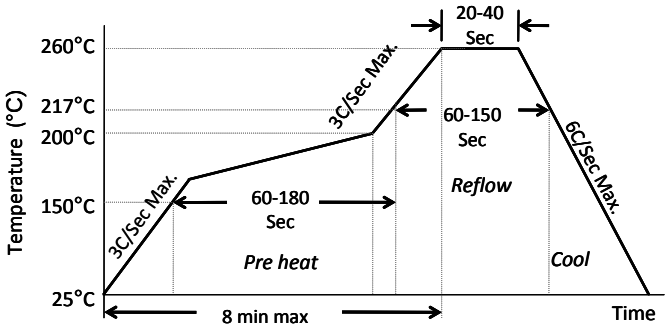


MSL 1 @ 260°C refer to JSTD-020C	
Ramp-Up Rate (200°C to Peak Temp)	3°C/Sec Max.
Preheat Time 150°C to 200°C	60-180 Sec
Time maintained above 217°C	60-150 Sec
Peak Temperature	255-260°C
Time within 5°C of actual Peak	20-40 Sec
Ramp-Down Rate	6°C/Sec Max.
Time 25°C to Peak Temperature	8 min Max.

Package Dimensions


7.0 x 5.0 mm Plastic Package

External Dimensions

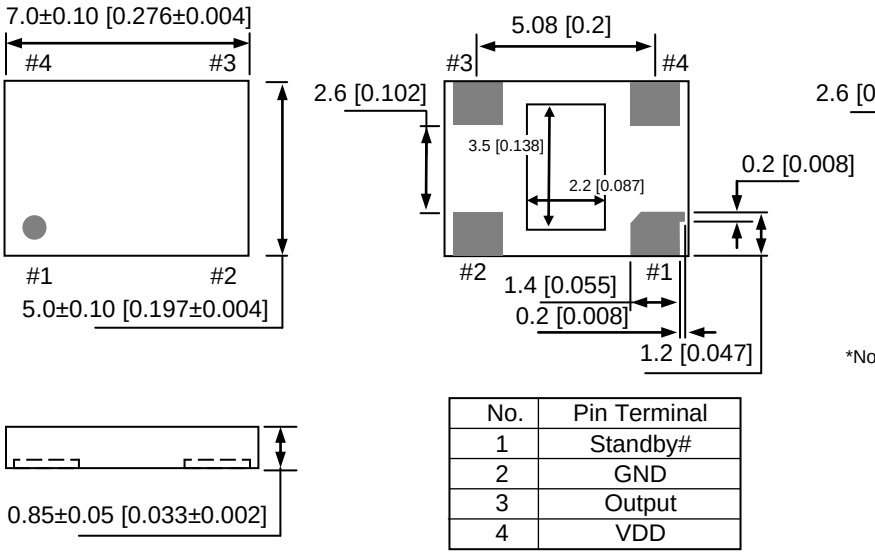

No.	Pin Terminal
1	Standby#
2	GND
3	Output
4	VDD

Recommended Land Pattern*

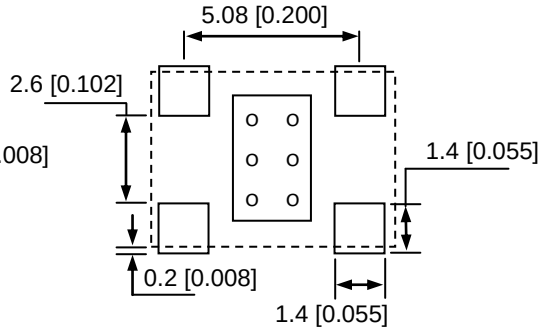


*Note: The center pad is not connected internally and should be left un-connected or tied to GND.

units: mm [inch]

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use.


5.0 x 3.2 mm Plastic Package

External Dimensions

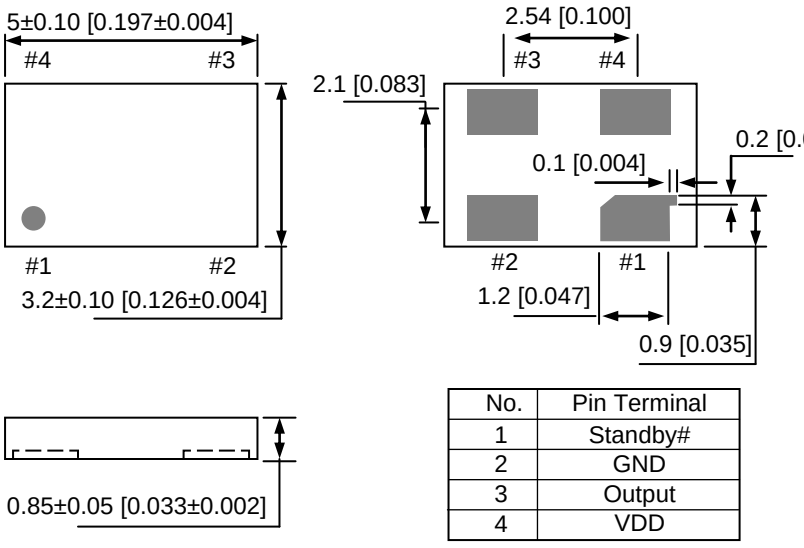

No.	Pin Terminal
1	Standby#
2	GND
3	Output
4	VDD


Recommended Land Pattern

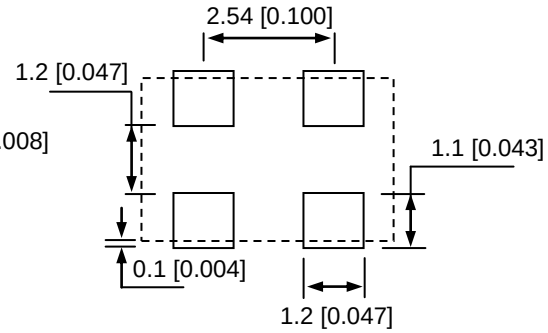

units: mm [inch]


3.2 x 2.5 mm Plastic Package

External Dimensions

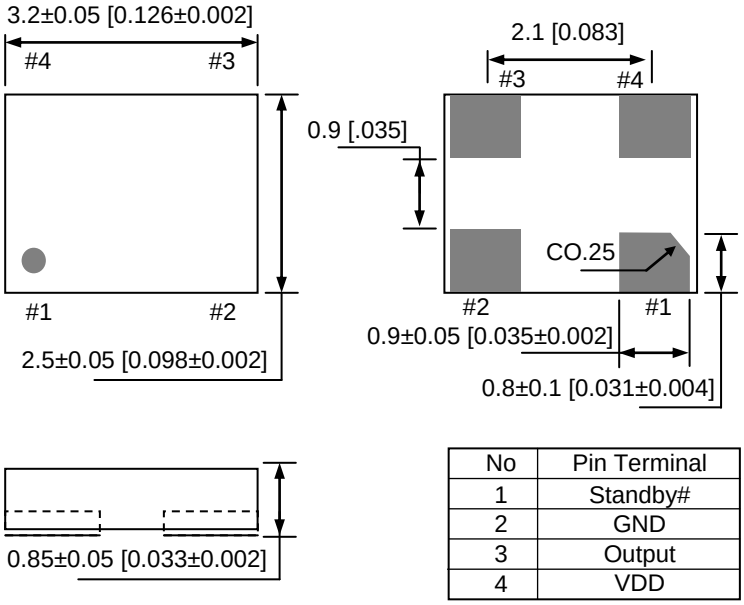

No	Pin Terminal
1	Standby#
2	GND
3	Output
4	VDD

Recommended Land Pattern

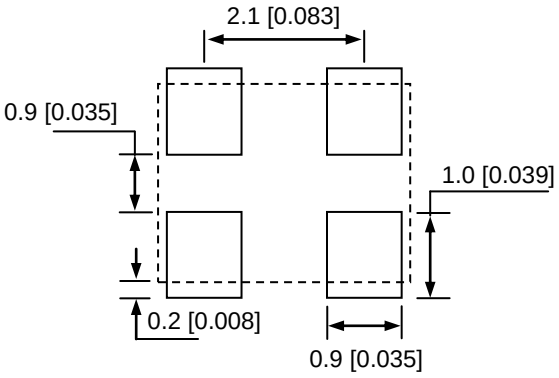


units: mm [inch]

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use.


2.5 x 2.0 mm Plastic Package

External Dimensions

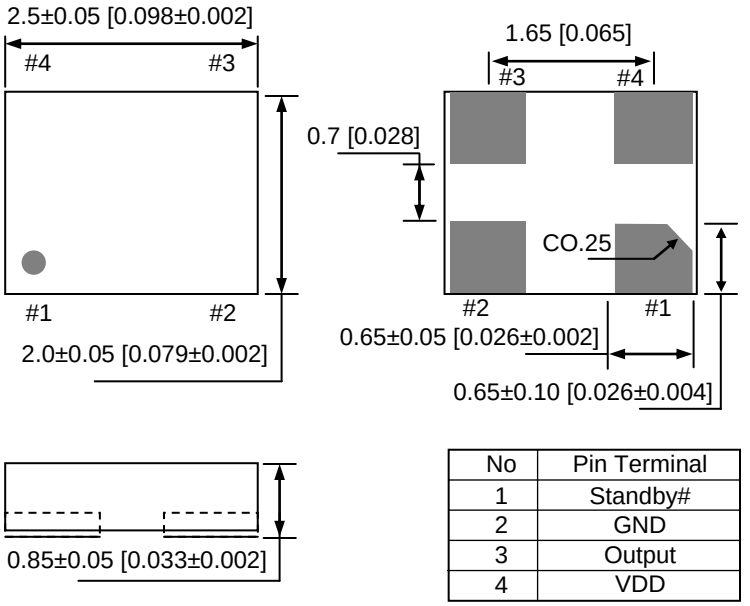

No	Pin Terminal
1	Standby#
2	GND
3	Output
4	VDD

Recommended Land Pattern

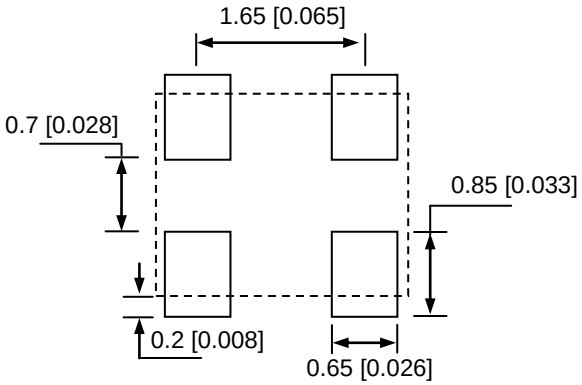

units: mm [inch]

Ordering Information

DSC8003 PTS - T

PART NUMBERING GUIDE			
Package (Plastic QFN)	**Temperature**	**Stability**	**Packing Option**
P=A: 7.0x5.0mm **P=B:** 5.0x3.2mm **P=C:** 3.2x2.5mm **P=D:** 2.5x2.0mm	**T=E:** -20° ~ +70° C **T=I:** -40° ~ +85° C **T=L:** -40° ~ +105° C	**S=1:** ±50ppm **S=2:** ±25ppm **S=3:** ±20ppm	**Blank:** Tubes **T:** Tape & Reel

Disclaimer:
Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

MICREL, Inc. • **2180 Fortune Drive,** **San Jose, California 95131** • **USA**
Phone: +1 (408) 944-0800 • **Fax: +1 (408) 474-1000** • **Email: hbwhelp@micrel.com** • **www.micrel.com**

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use.