HiPerFRED™ Epitaxial Diode with soft recovery

Preliminary Data

I_{FAV} = 8 A
V_{RRM} = 200 V
t_{rr} = 25 ns

V_{RSM} V	V_{RRM} V	Type
200	200	DSEP 8-02A



TO-220 AC

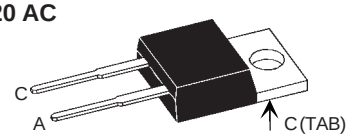

A = Anode, C = Cathode, TAB = Cathode

Symbol	Test Conditions	Maximum Ratings	
I_{FRMS}		35	A
I_{FAVM}	T_C = 150°C; rectangular, d = 0.5	8	A
I_{FSM}	T_{VJ} = 45°C; t_p = 10 ms (50 Hz), sine	80	A
E_{AS}	T_{VJ} = 25°C; non-repetitive I_{AS} = 2 A; L = 180 µH	0.5	mJ
I_{AR}	V_A = 1.5·V_R typ.; f = 10 kHz; repetitive	0.2	A
T_{VJ}		-55...+175	°C
T_{VJM}		175	°C
T_{stg}		-55...+150	°C
P_{tot}	T_C = 25°C	60	W
M_d	mounting torque	0.4...0.6	Nm
Weight	typical	2	g

Symbol	Test Conditions	Characteristic Values typ.	max.	
I_R ①	T_{VJ} = 25°C V_R = V_{RRM}		50	µA
	T_{VJ} = 150°C V_R = V_{RRM}		0.2	mA
V_F ②	I_F = 8 A; T_{VJ} = 150°C		0.94	V
	T_{VJ} = 25°C		1.30	V
R_{thJC}			2.5	K/W
R_{thCH}		0.5		K/W
t_{rr}	I_F = 1 A; -di/dt = 50 A/µs; V_R = 30 V; T_{VJ} = 25°C	25		ns
I_{RM}	V_R = 100 V; I_F = 10 A; -di_F/dt = 100 A/µs T_{VJ} = 100°C		4.1	A

Features

- International standard package
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low I_{RM}-values
- Soft recovery behaviour
- Epoxy meets UL 94V-0

Applications

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{RM} reduces:
  - Power dissipation within the diode
  - Turn-on loss in the commutating switch

Dimensions see Outlines.pdf

Recommended replacement: DPG10I200PA

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
② Pulse Width = 300 µs, Duty Cycle < 2.0 %

Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, test conditions and dimensions.

20080317a

© 2000 IXYS All rights reserved

NOT FOR NEW DESIGN