

Power Schottky Rectifier

I_{FAV} = 16 A
V_{RRM} = 45 V
V_F = 0.44 V

V_{RSM} V	V_{RRM} V	Type
45	45	DSS 16-0045B



TO-220 AC



A = Anode, C = Cathode , TAB = Cathode

NOT FOR NEW DESIGN

Symbol	Conditions	Maximum Ratings	
I_{FRMS}		35	A
I_{FAV}	T_C = 130°C; rectangular, d = 0.5	16	A
I_{FSM}	T_{VJ} = 45°C; t_p = 10 ms (50 Hz), sine	300	A
E_{AS}	I_{AS} = 15 A; L = 180 µH; T_{VJ} = 25°C; non repetitive	32	mJ
I_{AR}	V_A =1.5 • V_{RRM} typ.; f=10 kHz; repetitive	1.5	A
$(dv/dt)_{cr}$		1000	V/µs
T_{VJ}		-55...+150	°C
T_{VJM}		150	°C
T_{stg}		-55...+150	°C
P_{tot}	T_C = 25°C	90	W
M_d	mounting torque	0.4...0.6	Nm
Weight	typical	2	g

Symbol	Conditions	Characteristic Values typ.	max.	
I_R ①	V_R = V_{RRM}; T_{VJ} = 25°C		10	mA
	V_R = V_{RRM}; T_{VJ} = 100°C		100	mA
V_F	I_F = 15 A; T_{VJ} = 125°C		0.44	V
	I_F = 15 A; T_{VJ} = 25°C		0.48	V
	I_F = 30 A; T_{VJ} = 125°C		0.62	V
R_{thJC}			1.4	K/W
R_{thCH}		0.5		K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0%
Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, Conditions and dimensions.

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM}-values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see Outlines.pdf

IXYS reserves the right to change limits, Conditions and dimensions.

© 2006 IXYS All rights reserved

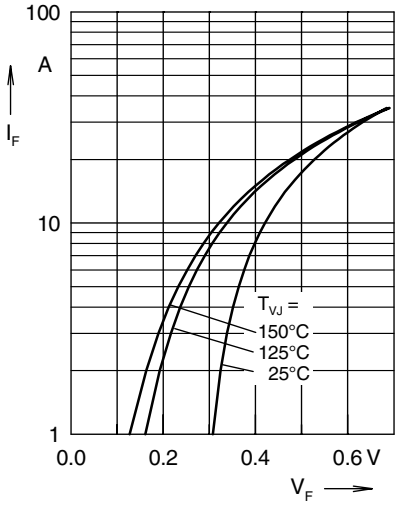


Fig. 1 Maximum forward voltage drop characteristics

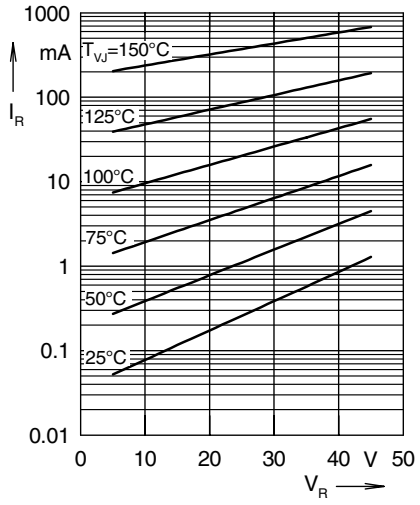


Fig. 2 Typ. value of reverse current I_R versus reverse voltage V_R

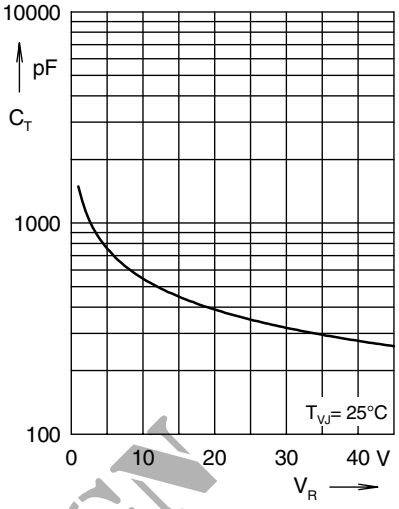


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

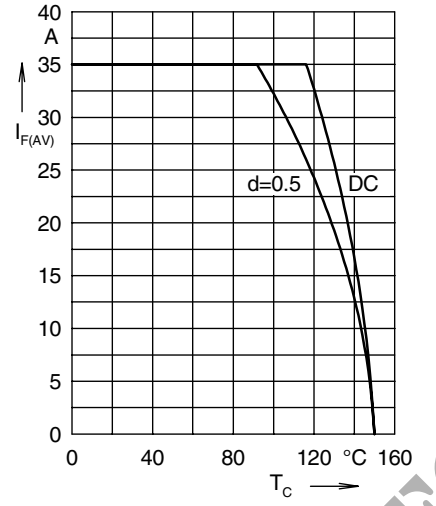


Fig. 4 Average forward current $I_{F(AV)}$ versus case temperature T_C

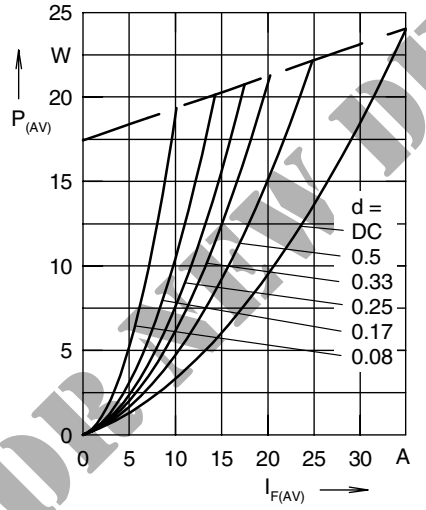


Fig. 5 Forward power loss characteristics

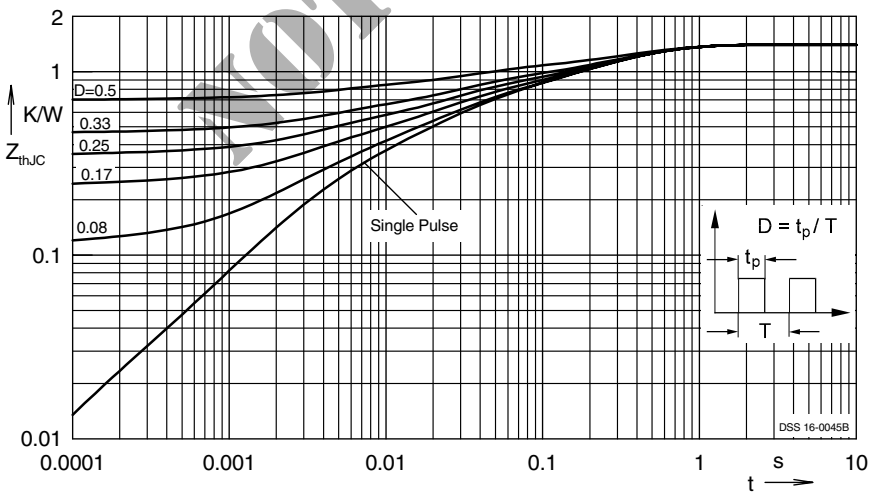


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode

NOT FOR NEW DESIGN

IXYS reserves the right to change limits, Conditions and dimensions.

© 2006 IXYS All rights reserved