MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH – ENCLOSED

CATALOG LISTING
DTE6–2RN

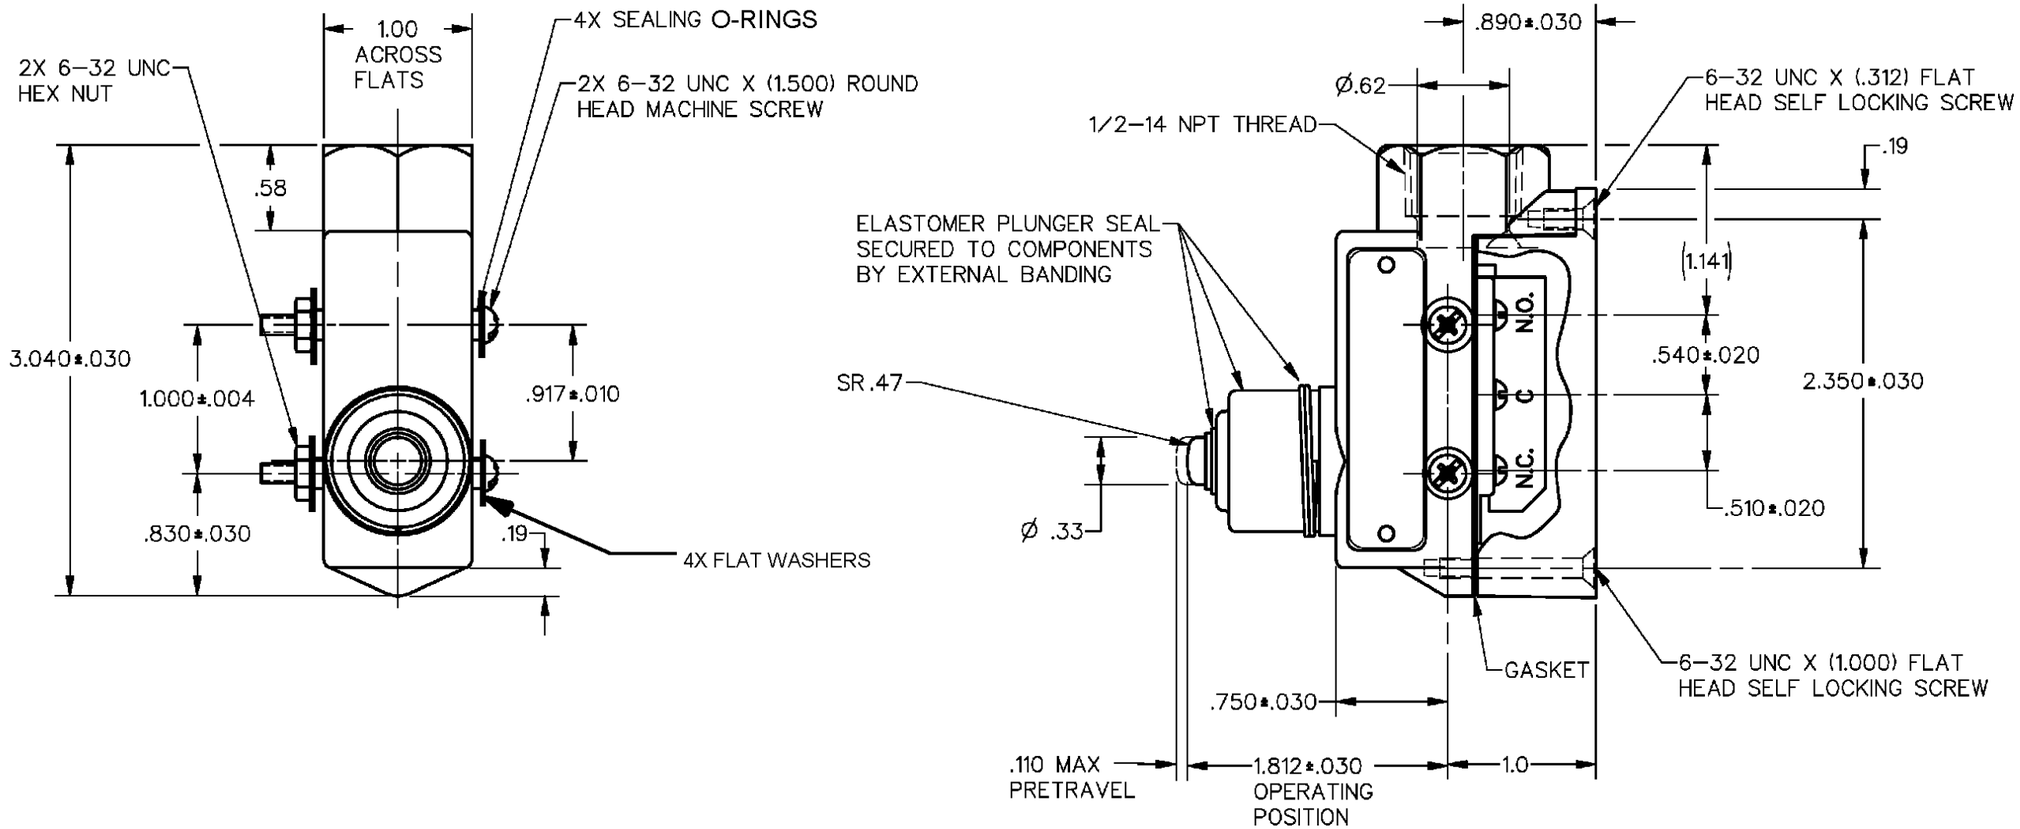

NOTE
1 – 6X 4–40 UNC X (.125) TERMINAL SCREW AND LOCKWASHER
2 – SEAL RATING : NEMA 1,3,4
IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

CHARACTERISTICS

OPERATING FORCE — — — — — 26–59 OZ
DIFFERENTIAL TRAVEL — — — — .060 MAX
OVERTRAVEL — — — — — — — .125 MIN
BASIC SWITCH REPLACEMENT — — — DT-2R3-A7

ELECTRICAL DATA

CONTACT ARRANGEMENT
D P D T

L59 10A 125 OR 250 VAC
0.3A 125 VDC, 0.15A 250 VDC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .56 LB

ANSI Y14.5M–1982 APPLIES

CATALOG LISTING DTE6–2RN
ISSUE 16
M
REPLACES
RELEASE NO. 03NOV06
CHECK RJ
REVISIONS
A CO–73751 S A V 8 OCT 92
B CO–73655 T S M 21 APR 93
C CO–77179B K D R 21 FEB 94
D 0016895 VKR 18NOV05
E 0018962 VKR 14FEB06
F 0023923 RKP 24AUG06
G 0025947 SPK 03NOV06
18NOV05 BP
CHECK
21 FEB 94
W L S
CHECK
8 OCT 92
DRAWN S A V
DDM/CAD