


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/8/04	

APPROVED: _____

DATE: _____ TITLE: _____

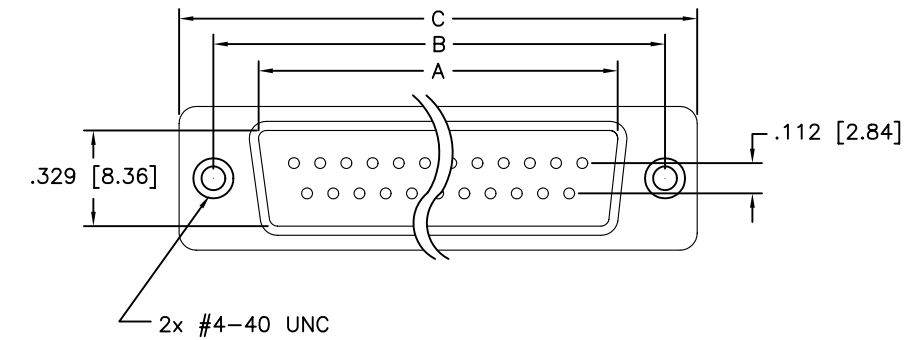

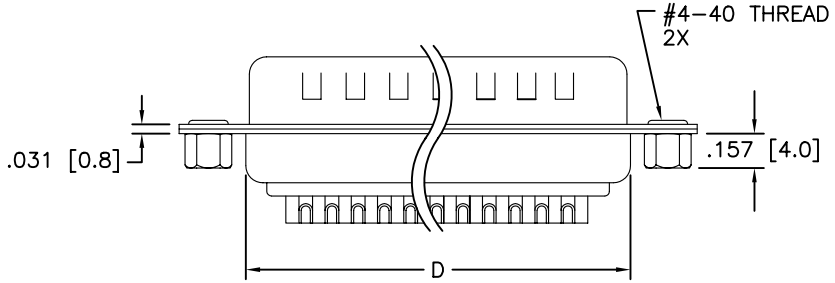



Unit: Inch / mm

POSITIONS	Plug Dimensions							
	A		B		C		D	
9	.666	(16.92)	.984	(24.99)	1.213	(30.81)	.759	(19.28)
15	.994	(25.25)	1.312	(33.32)	1.541	(39.14)	1.083	(27.51)
25	1.534	(38.96)	1.852	(47.04)	2.088	(53.04)	1.625	(41.30)
37	2.182	(55.42)	2.500	(63.50)	2.729	(69.32)	2.272	(57.71)
50	2.079	(52.81)	2.406	(61.11)	2.635	(66.93)	2.178	(55.32)

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Shell: Steel, Nickel plated
Plating:
Gold flash over Nickel underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 5 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 5000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +105°C

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	11/8/04
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SOLDER CUP D-SUB, MALE, RIVITED
#4-40 CLINCH NUTS

SIZE	PART NO.	REV.
X	DXXX-PD-SL	-

REF: | SCALE: NTS | SHEET 1 OF 1