

Marketing Bulletin

DATE: March 24th, 2006
TO: All Sales Personnel
FROM: Mark Stoner
RE: Product Termination

To all concerned parties,


This bulletin is to notify all customers of the discontinuation of the following Ecliptek series effective March 24th, 2006:

Series	Description	Recommended Replacement
E13C4	3.3V 5 x 7mm SMD LVPECL Oscillator	E13C7 or E13D8

In compliance with our End of Life (EOL) policy, this will serve as advanced notice of product termination. New orders will not be accepted after April 1st, 2007, with delivery to conclude by July 1st 2007.

If there are any questions pertaining to this bulletin, please feel free to contact me.
Thank you again for your cooperation.

Best Regards,




Mark W. Stoner
Director of Marketing
Ecliptek Corporation

E13C4 Series

- RoHS Compliant (Pb-Free)
- LVPECL Output Oscillators
- 3.3V Supply Voltage
- AT-Cut Third Overtone Crystal
- Ceramic 6-Pad SMD Package
- Stability to 25ppm
- Tri-State Output
- Complementary Output



ECLIPTEK
CORPORATION

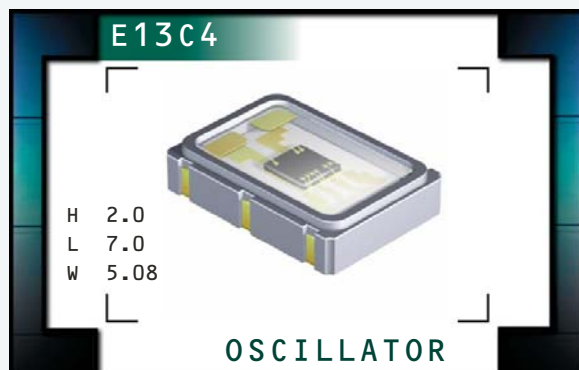

NOTES

OBSOLETE

ELECTRICAL SPECIFICATIONS

Nominal Frequency		100MHz, 106.250MHz, 125MHz, 133.333MHz, 155.52MHz, 156.25MHz, 161.1328MHz or 166MHz
Operating Temperature Range		0°C to 70°C, -5°C to 85°C, or -40°C to +85°C
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{CC})		3.3V _{DC} ±5%
Input Current		75mA Maximum
Frequency Tolerance / Stability		Inclusive of Operating Temperature Range, Supply Volt, Load, and 1st year Aging at 25°C ±100ppm, ±50ppm, or ±25ppm Maximum
Output Voltage Logic High (V_{OH})		$V_{CC}-1.025V_{DC}$ Minimum
Output Voltage Logic Low (V_{OL})		$V_{CC}-1.620V_{DC}$ Maximum
Rise Time / Fall Time		20% to 80% of waveform 1 nSeconds Maximum
Duty Cycle		at 50% of waveform 50 ±10(%) 50 ±5(%)
Load Drive Capability		50 Ohms into $V_{CC}-2.0V_{DC}$
Logic Control / Additional Output		Complementary Output and Tri-State
Tri-State Input Voltage	V_{IH} of 70% of V_{CC} Minimum	Enables Output
	No Connection	Enables Output
	V_{IL} of 30% of V_{CC} Maximum	Disables Output: High Impedance
Standby Current		Without Load 10µA Maximum
Start Up Time		10 mSeconds Maximum
RMS Phase Jitter		FJ = 12kHz to 20MHz 0.24 pSec Typical, 1 pSec Maximum
RMS Period Jitter		3 pSec Typical, 5 pSec Maximum

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
E13C4

PACKAGE
CERAMIC

VOLTAGE
3.3V

CLASS
OS1A

REV. DATE
04/03

OBSOLETE

PART NUMBERING GUIDE

E13C4 E 2 F - 155.520M TR

FREQUENCY TOLERANCE & STABILITY/ OPERATING TEMPERATURE RANGE

C=±100ppm Maximum over 0°C to +70°C
D=±50ppm Maximum over 0°C to +70°C
E=±25ppm Maximum over 0°C to +70°C
G=±100ppm Maximum over -40°C to +85°C
H=±50ppm Maximum over -40°C to +85°C
J=±25ppm Maximum over -40°C to +85°C
L=±100ppm Maximum over -5°C to +85°C
M=±50ppm Maximum over -5°C to +85°C
N=±25ppm Maximum over -5°C to +85°C

AVAILABLE OPTIONS

Blank=Tubes
TR=Tape and Reel (Standard)

FREQUENCY


LOGIC CONTROL/ADDITIONAL OUTPUT

F=Complementary Output and Tri-State


DUTY CYCLE

1=50%±10%, 2=50%±5%


MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

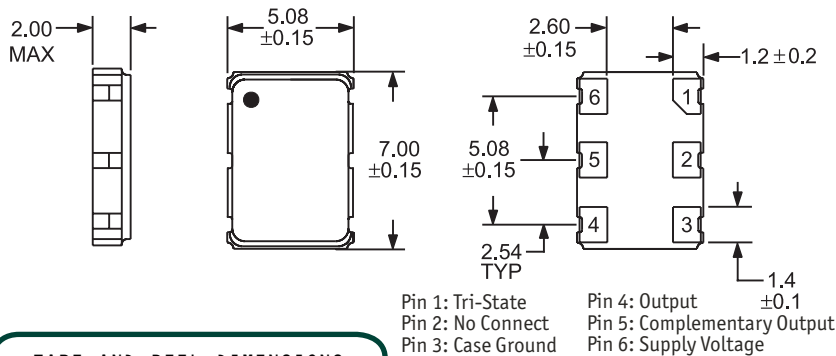


SUGGESTED SOLDER PAD LAYOUT ALL DIMENSIONS IN MILLIMETERS

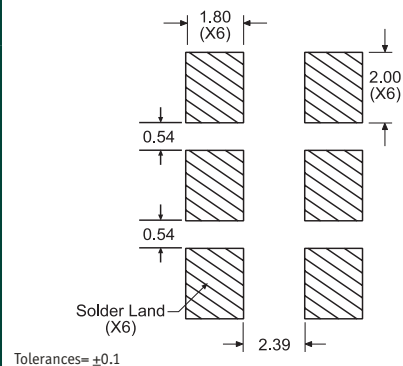

TAPE AND REEL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

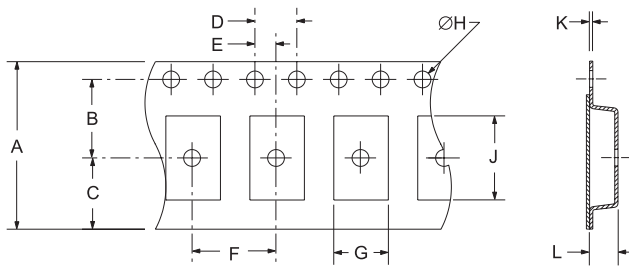

TAPE	A	B	C	D	E
	16±.3-.1	7.5±.1	6.75±.1	4 ±.1	2±.1
F	G	H	J	K	L
8±.1	B0*	1.5 +.1-.0	A0*	.3 ±.05	K0*

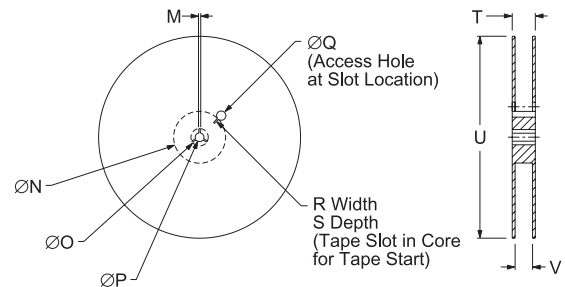

REEL	M	N	O	P	Q
	1.5 MIN	50 MIN	20.2 MIN	13±.2	40 MIN
R	S	T	U	V	QTY/REEL
2.5 MIN	10 MIN	22.4 MAX	360 MAX	16.4±2-0	1,000

*Compliant to EIA 481A

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic

Fine Leak Test
Gross Leak Test
Mechanical Shock
Vibration
Solderability
Temperature Cycling
Resistance to Soldering Heat
Resistance to Solvents

Specification

MIL-STD-883, Method 1014, Condition A
MIL-STD-883, Method 1014, Condition C
MIL-STD-202, Method 213, Condition C
MIL-STD-883, Method 2007, Condition A
MIL-STD-883, Method 2002
MIL-STD-883, Method 1010
MIL-STD-202, Method 210
MIL-STD-202, Method 215

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: XX.XXX M

Frequency in MHz (5 Digits Maximum + Decimal)

Line 3: XX Y ZZ

Week of Year
Last Digit of Year
Eclipse Manufacturing Identifier

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	E13C4	CERAMIC	3.3V	0S1A	04/03