


# E18


## SCSI-II D-SUB PCB STRAIGHT




| POSITION | A     | B     | C     | D     |
|----------|-------|-------|-------|-------|
| 20F      | 11.45 | 27.45 | 33.60 | 21.05 |
| 26F      | 15.26 | 31.26 | 37.41 | 24.86 |
| 28F      | 16.53 | 32.53 | 38.68 | 26.13 |
| 40F      | 24.15 | 40.15 | 46.30 | 33.75 |
| 50F      | 30.50 | 46.50 | 52.65 | 40.10 |
| 60F      | 36.85 | 52.85 | 59.00 | 46.45 |
| 68F      | 41.93 | 57.93 | 64.80 | 51.53 |
| 80F      | 49.55 | 65.55 | 71.70 | 59.15 |
| 100F     | 62.25 | 78.25 | 84.40 | 71.85 |
| 120F     | 74.95 | 90.95 | 97.10 | 84.55 |




P.C. BOARD LAYOUT FOR  
20F, 28F, 40F, 68F, 80F, 100F, 120F  
(TYPE C)

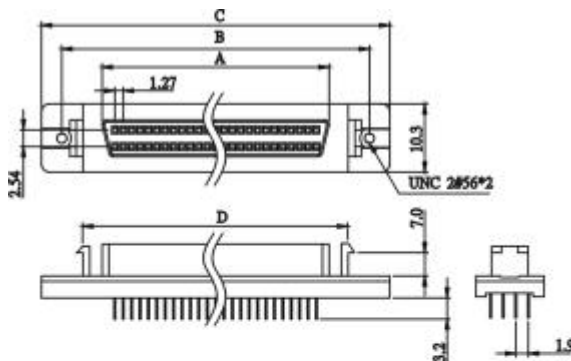


P.C. BOARD LAYOUT PATTERN

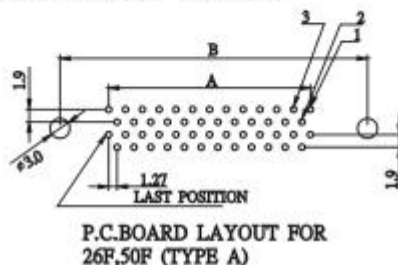

P.C. BOARD LAYOUT FOR  
26F, 50F (TYPE A)

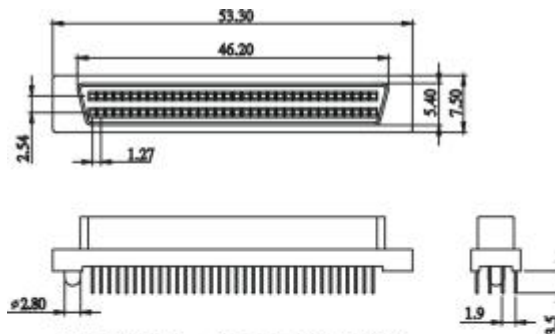

ALL PLASTIC - 68 POSITION ONLY

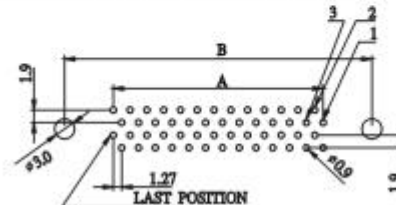

P.C. BOARD LAYOUT FOR  
20F, 28F, 40F, 68F, 80F, 100F, 120F  
(TYPE B)

### HOW TO ORDER:

E18 -  1 -  2 -  3 -  4 -  5 -  6 -  7 -  8

| 1.NO. OF CONTACT                                                                                       | 2.CONTACT TYPE                                | 3.CONTACT PLATING                                                                                                                 | 4.SHELL OPTION                   |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| 26 28 40 50 68<br>80 100                                                                               | F: FEMALE                                     | T: TIN PLATED<br>S: SELECTIVE<br>G: GOLD FLASH<br>A: 5u" INCH GOLD<br>B: 10u" INCH GOLD<br>C: 15u" INCH GOLD<br>D: 30u" INCH GOLD | A: METAL SHELL<br>B: ALL PLASTIC |
| 5.MOUNTING METHOD                                                                                      | 6.PARTS OPTION                                | 7.P.C.BOARD LAYOUT                                                                                                                | 8.INSULATOR COLOR                |
| A: THREAD INSERT 2-56 UNC<br>B: THREAD INSERT 4-40 UNC<br>C: THREAD INSERT M3<br>D: THREAD INSERT M2.6 | A: WITH FRONT LATCH<br>B: WITHOUT FRONT LATCH | A: TYPE A<br>B: TYPE B<br>C: TYPE C                                                                                               | 1. BLACK                         |