

DATA SHEET

E32/16/9

E cores and accessories


Supersedes data of September 2004

2008 Sep 01

CORE SETS

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(l/A)$	core factor (C1)	0.894	mm ⁻¹
V_e	effective volume	6180	mm ³
l_e	effective length	74	mm
A_e	effective area	83	mm ²
A_{min}	minimum area	83	mm ²
m	mass of core half	≈ 16	g

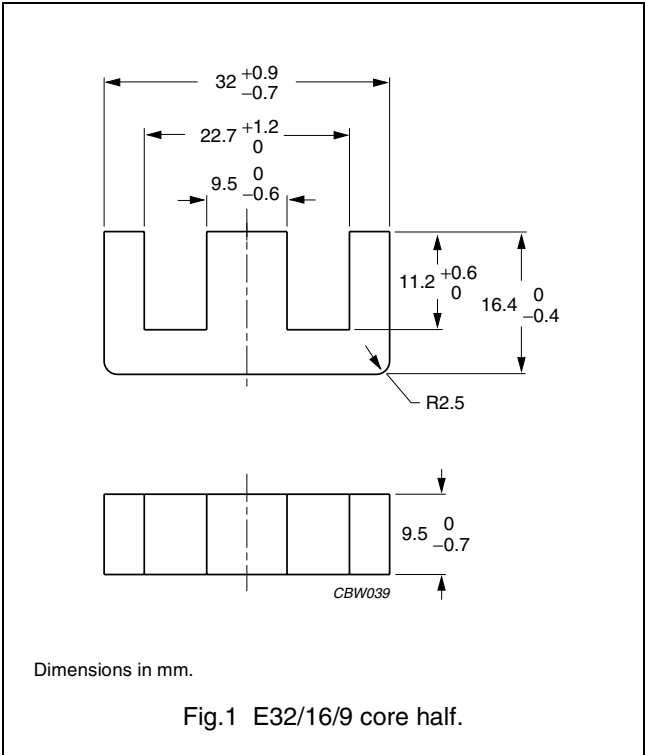

Core halves

A_L measured in combination with a non-gapped core half, clamping force for A_L measurements 40 ± 20 N, unless stated otherwise.

GRADE	A_L (nH)	μ_e	TOTAL AIR GAP (μm)	TYPE NUMBER
3C90	$100 \pm 5\%^{(1)}$	≈ 71	≈ 1600	E32/16/9-3C90-E100
	$160 \pm 5\%^{(1)}$	≈ 114	≈ 860	E32/16/9-3C90-E160
	$250 \pm 5\%$	≈ 177	≈ 480	E32/16/9-3C90-A250
	$315 \pm 5\%$	≈ 223	≈ 360	E32/16/9-3C90-A315
	$400 \pm 8\%$	≈ 284	≈ 260	E32/16/9-3C90-A400
	$630 \pm 15\%$	≈ 447	≈ 150	E32/16/9-3C90-A630
	$2500 \pm 25\%$	≈ 1770	≈ 0	E32/16/9-3C90
3C92 des	$1850 \pm 25\%$	≈ 1320	≈ 0	E32/16/9-3C92
3C94	$2500 \pm 25\%$	≈ 1770	≈ 0	E32/16/9-3C94
3C96 des	$2300 \pm 25\%$	≈ 1630	≈ 0	E32/16/9-3C96

E cores and accessories

E32/16/9

GRADE	A_L (nH)	μ_e	TOTAL AIR GAP (μm)	TYPE NUMBER
3F3	$100 \pm 5\%^{(1)}$	≈ 71	≈ 1600	E32/16/9-3F3-E100
	$160 \pm 5\%^{(1)}$	≈ 114	≈ 860	E32/16/9-3F3-E160
	$250 \pm 5\%$	≈ 177	≈ 480	E32/16/9-3F3-A250
	$315 \pm 5\%$	≈ 223	≈ 360	E32/16/9-3F3-A315
	$400 \pm 8\%$	≈ 284	≈ 260	E32/16/9-3F3-A400
	$630 \pm 15\%$	≈ 447	≈ 150	E32/16/9-3F3-A630
	$2300 \pm 25\%$	≈ 1630	≈ 0	E32/16/9-3F3
3F35 des	$1700 \pm 25\%$	≈ 1210	≈ 0	E32/16/9-3F35

1. A_L measured in combination with a equal gapped core half.

Properties of core sets under power conditions


GRADE	B (mT) at	CORE LOSS (W) at			
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; $\hat{B} = 200$ mT; T = 100 °C	f = 100 kHz; $\hat{B} = 100$ mT; T = 100 °C	f = 100 kHz; $\hat{B} = 200$ mT; T = 100 °C	f = 400 kHz; $\hat{B} = 50$ mT; T = 100 °C
3C90	≥ 330	≤ 0.65	≤ 0.7	–	–
3C92	≥ 370	–	≤ 0.55	≤ 3.2	–
3C94	≥ 330	–	≤ 0.55	≤ 3.2	–
3C96	≥ 340	–	≤ 0.43	≤ 2.5	–
3F3	≥ 320	–	≤ 0.75	–	≤ 1.3
3F35	≥ 300	–	–	–	–

Properties of core sets under power conditions (continued)

GRADE	B (mT) at	CORE LOSS (W) at			
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 500 kHz; $\hat{B} = 50$ mT; T = 100 °C	f = 500 kHz; $\hat{B} = 100$ mT; T = 100 °C	f = 1 MHz; $\hat{B} = 30$ mT; T = 100 °C	f = 3 MHz; $\hat{B} = 10$ mT; T = 100 °C
3C90	≥ 330	–	–	–	–
3C92	≥ 370	–	–	–	–
3C94	≥ 330	–	–	–	–
3C96	≥ 340	≤ 2.3	–	–	–
3F3	≥ 320	–	–	–	–
3F35	≥ 300	≤ 0.83	≤ 6.5	–	–

COIL FORMER**General data for 12-pins E32/16/9 coil former**

PARAMETER	SPECIFICATION
Coil former material	polyamide (PA6.6), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41871(M)
Pin material	copper-tin alloy (CuSn), tin (Sn) plated
Maximum operating temperature	130 °C, "IEC 60085", class B
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B: 350 °C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1: 235 °C, 2 s

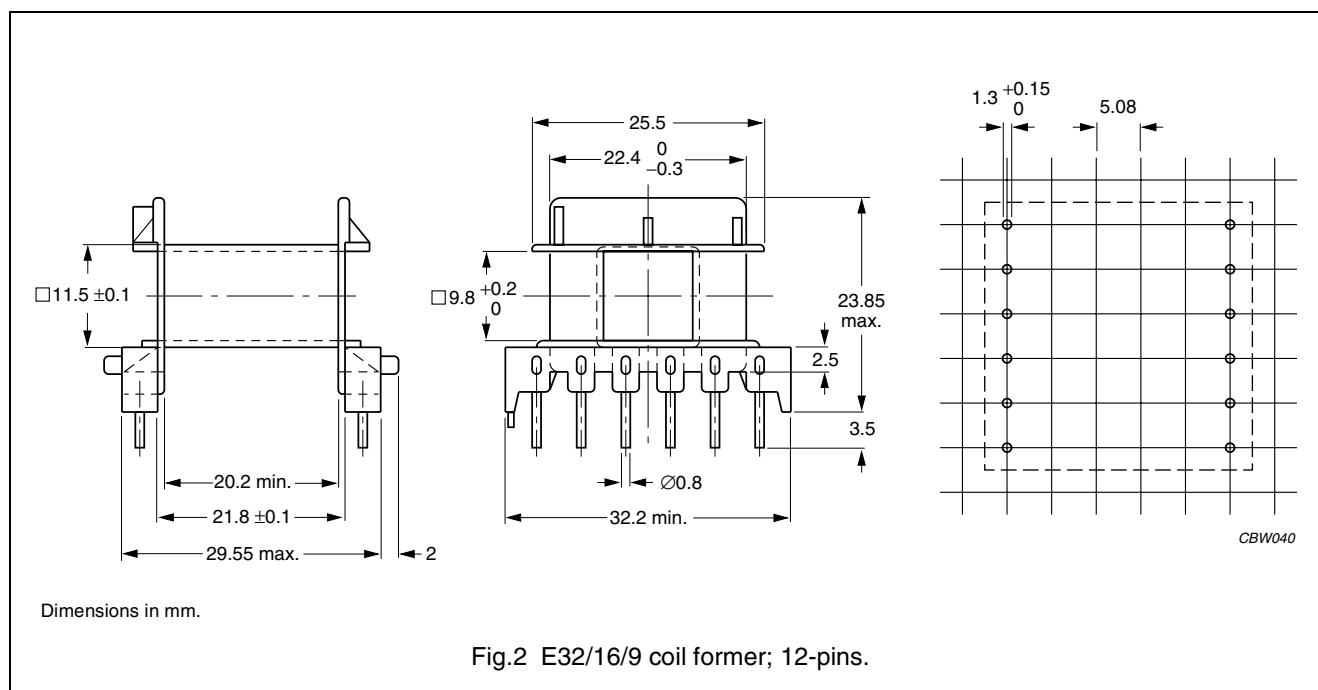**Winding data and area product for 12-pins E32/16/9 coil former**

NUMBER OF SECTIONS	WINDING AREA (mm ²)	MINIMUM WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	AREA PRODUCT Ae x Aw (mm ⁴)	TYPE NUMBER
1	97	20.2	60	8050	CPH-E32/16/9-1S-12P

E cores and accessories

E32/16/9

DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

STATUS	INDICATION	DEFINITION
Prototype		These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in		These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support		These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.