
EVERLIGHT AMERICA

DATASHEET

SMD ▪ B
EAST16086YA6

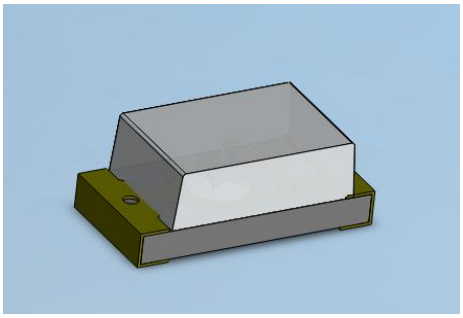

Features

- Package in 8mm tape on 7″ diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

Description

- The SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

+-

Copyright © 2010, Everlight All Rights Reserved. Release Date :11 .August. 2014. Issue No: DSE-0012456 Rev.1 www.everlight.com

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
AlGaInP	Brillant Yellow	Water Clear

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_F	50	mA
eak Forward Current (Duty 1/10 @1KHz)	I_{FP}	100	mA
Power Dissipation	Pd	120	mW
Electrostatic Discharge	ESD_{HBM}	2000	V
Operating Temperature	T_{opr}	-40 ~ +85	℃
Storage Temperature	Tstg	-40 ~ +90	℃
Soldering Temperature	Tsol	Reflow Soldering : 260 ℃ for 10 sec. Hand Soldering : 350 ℃ for 3 sec.	

Copyright ©2010,Everlight All Rights Reserved. Release Date :11 .August. 2014. Issue No: DSE-0012456 Rev.1

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	285.0	-----	565.0	mcd	I_F=20mA
Viewing Angle	$2\theta_{1/2}$	-----	120	-----	deg	
Peak Wavelength	λp	-----	591	-----	nm	
Dominant Wavelength	λd	586.0	-----	594.0	nm	
Spectrum Radiation Bandwidth	Δ λ	-----	15	-----	nm	
Forward Voltage	V_F	1.75	-----	2.35	V	
Reverse Current	I_R	-----	-----	10	μA	V_R=5V

Note:
1.Tolerance of Luminous Intensity: ±11%
2.Tolerance of Dominant Wavelength ±1nm
3.Tolerance of Forward Voltage: ±0.1V

Copyright ©2010,Everlight All Rights Reserved. Release Date :11 .August. 2014. Issue No: DSE-0012456 Rev.1

Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
T1	285.0	360.0	mcd	I_F =20mA
T2	360.0	450.0		
U1	450.0	565.0		

Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
DD6	586.0	588.0	nm	I_F =20mA
DD7	588.0	590.0		
DD8	590.0	592.0		
DD9	592.0	594.0		


Bin Range Of Forward Voltage


Bin Code	Min.	Max.	Unit	Condition
0	1.75	1.95	V	I_F =20mA
1	1.95	2.15		
2	2.15	2.35		


Note:
1.T0olerance of Luminous Intensity: ±11%
2.Tolerance of Dominant Wavelength ±1nm
3.Tolerance of Forward Voltage: ±0.1V


Copyright ©2010,Everlight All Rights Reserved. Release Date :11 .August. 2014. Issue No: DSE-0012456 Rev.1


Typical Electro-Optical Characteristics Curves

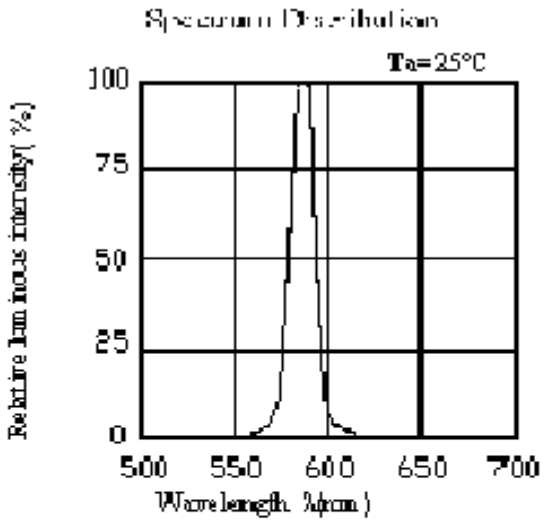


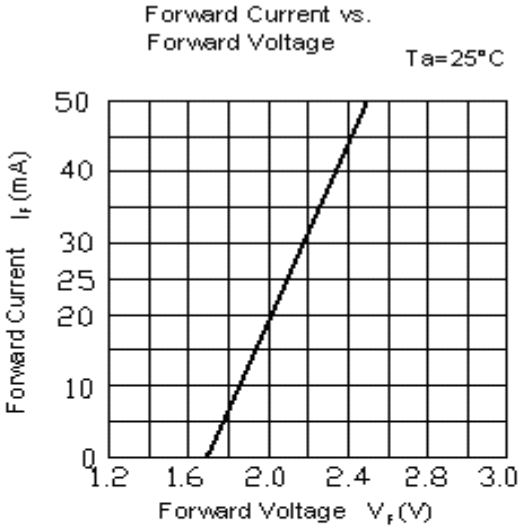

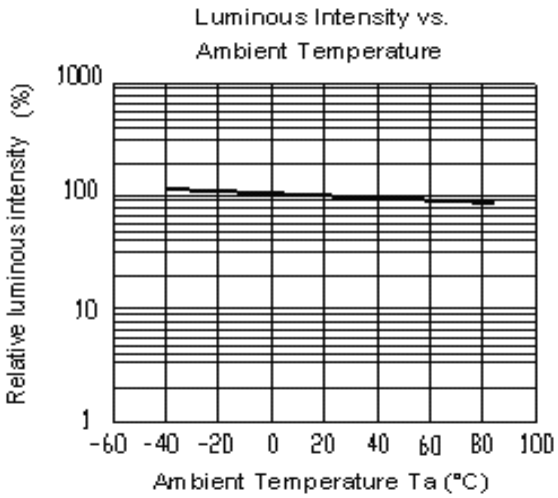

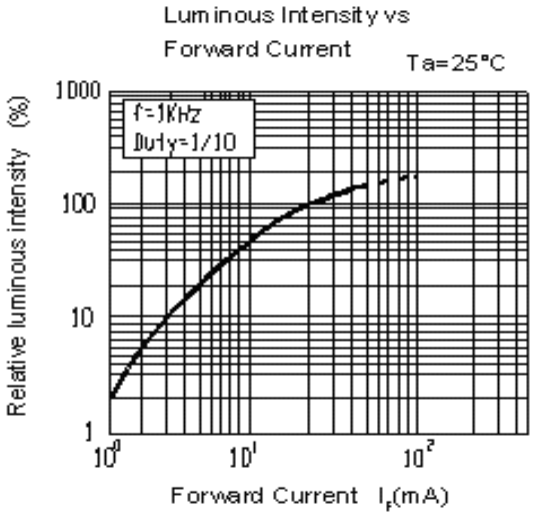


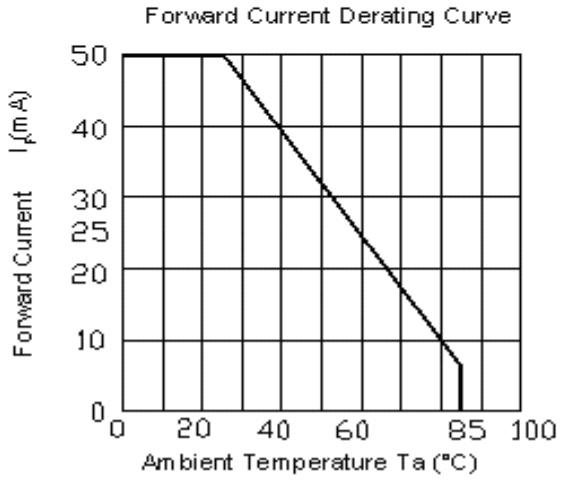


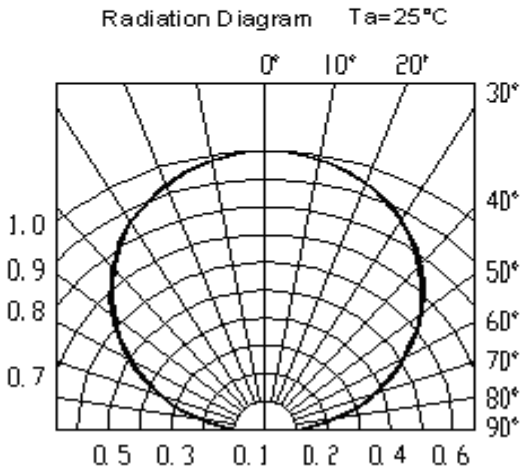



Copyright ©2010,Everlight All Rights Reserved. Release Date :11 .August. 2014. Issue No: DSE-0012456 Rev.1

Package Dimension

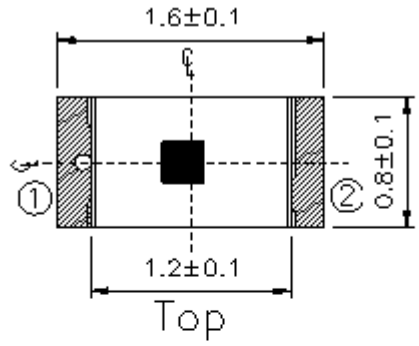




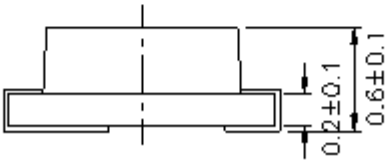

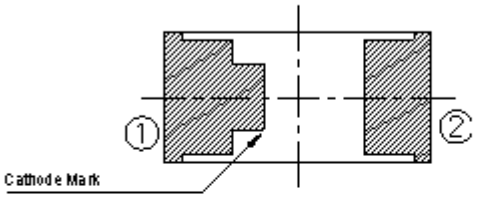

Recommend Sodering Pad

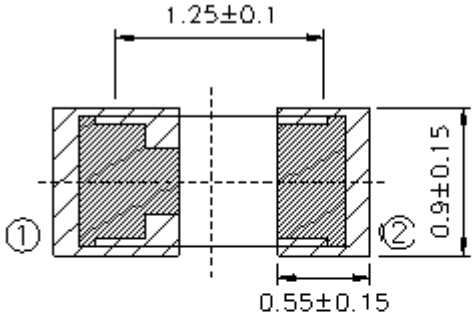


Suggested pad dimension is just for reference only.
Please modify the pad dimension based on individual need.

Note: Tolerances unless mentioned ±0.1mm. Unit = mm


Copyright ©2010,Everlight All Rights Reserved. Release Date :11 .August. 2014. Issue No: DSE-0012456 Rev.1

Moisture Resistant Packing Materials
Label Explanation

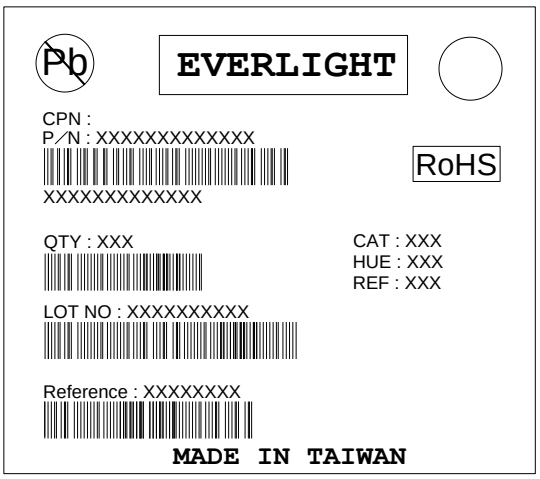

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number


Reel Dimensions

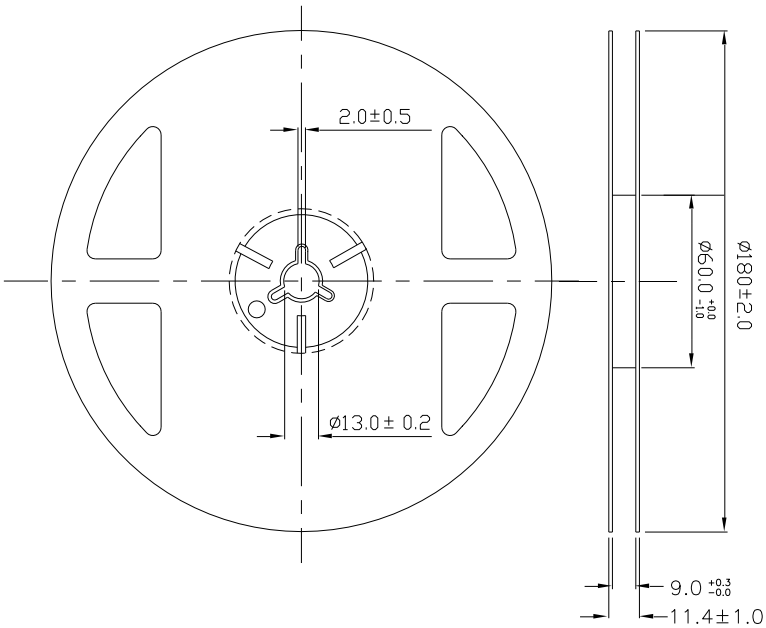

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm


Copyright ©2010,Everlight All Rights Reserved. Release Date :11 .August. 2014. Issue No: DSE-0012456 Rev.1

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

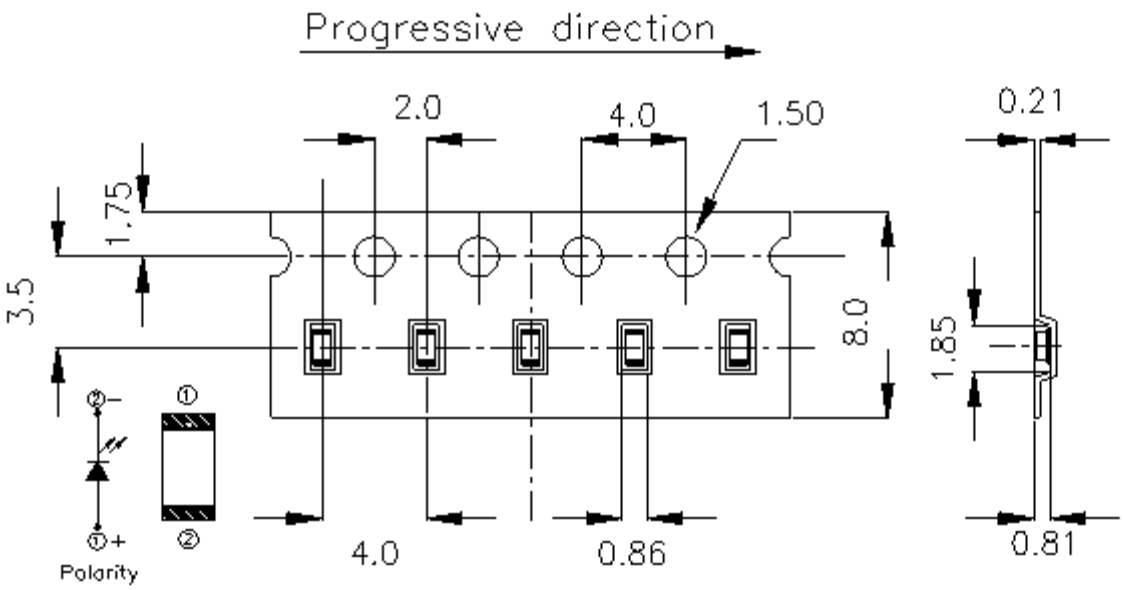

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

Moisture Resistant Packaging

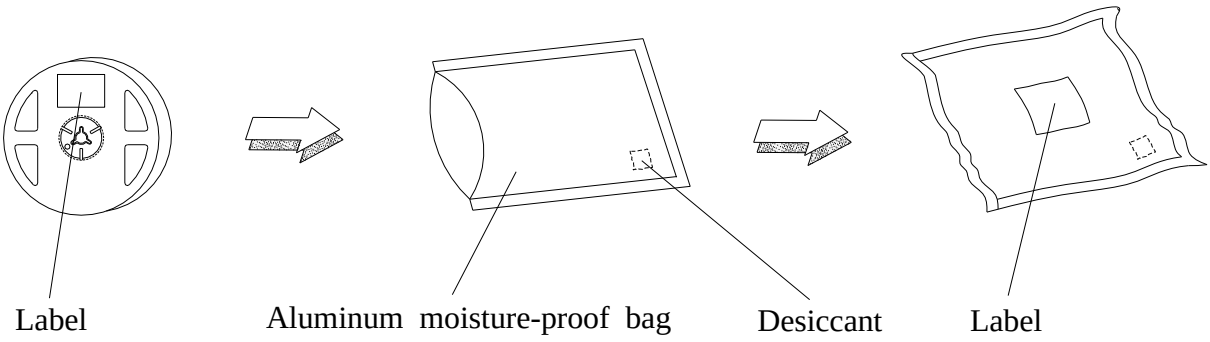


Copyright ©2010,Everlight All Rights Reserved. Release Date :11 .August. 2014. Issue No: DSE-0012456 Rev.1

Precautions For Use

1. Over-current-proof
Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage
2.1 Do not open moisture proof bag before the products are ready to use.
2.2 Before opening the package: The LEDs should be kept at 30℃ or less and 90%RH or less.
2.3 After opening the package: The LED's floor life is 1 year under 30℃ or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
Baking treatment : 60±5℃ for 24 hours.


3. Soldering Condition
3.1 Pb-free solder temperature profile

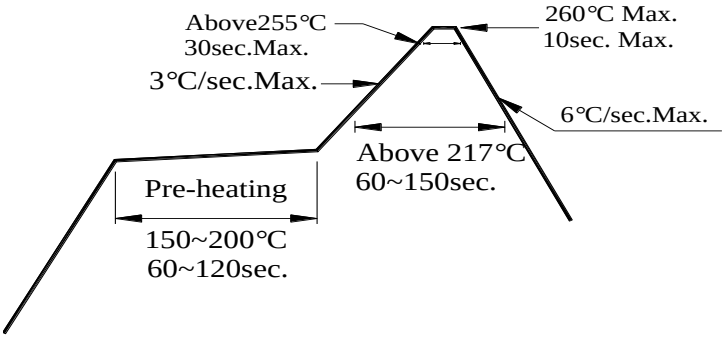

3.2 Reflow soldering should not be done more than two times.
3.3 When soldering, do not put stress on the LEDs during heating.
3.4 After soldering, do not warp the circuit board.

4.Soldering Iron
Each terminal is to go to the tip of soldering iron temperature less than 350℃ for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing
Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

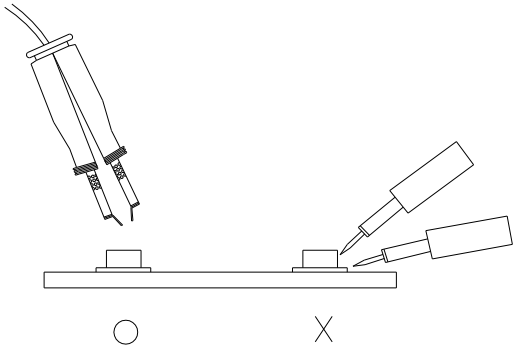

Copyright ©2010,Everlight All Rights Reserved. Release Date :11 .August. 2014. Issue No: DSE-0012456 Rev.1

Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight Americas before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

Copyright ©2010,Everlight All Rights Reserved. Release Date :11 .August. 2014. Issue No: DSE-0012456 Rev.1