


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	

APPROVED: _____


DATE: _____ TITLE: _____



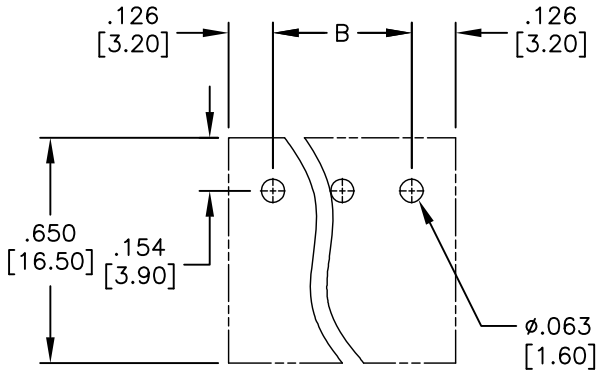

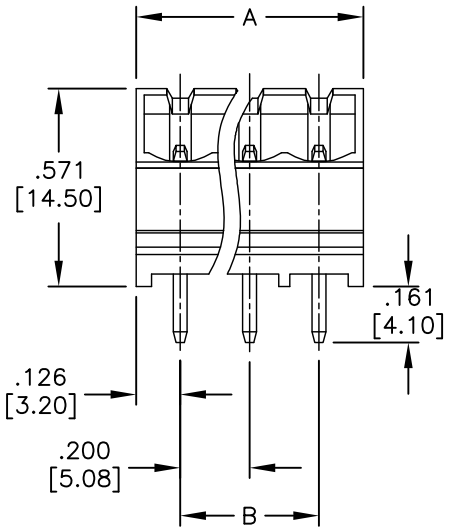

Recommended PCB Layout

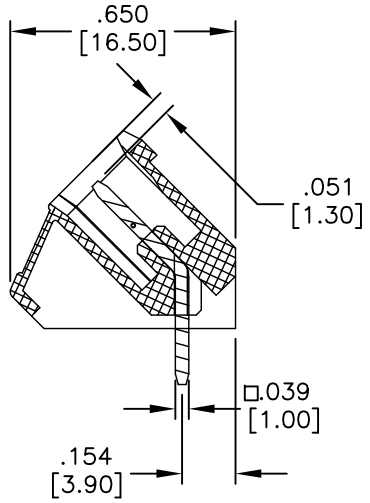

Poles: 2 thru 24

A = .200 [5.08] X No. of Spaces + .255 [6.48]

B = .200 [5.08] X No. of Spaces

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Green

Contact: Copper Alloy, Tin plated.

Electrical:

Operation voltage: 300 VAC

Current rating: 15 Amps

Mechanical:

Withstanding Voltage: 1.6KV

Environmental:

Operating temperature: -40°C to +115°C

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	11/30/10
CHECKED	AH	11/30/10
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

EURO BLOCK, PCB .200 [5.08] PITCH

45 DEGREE ANGLE

SIZE	PART NO.	REV.
X	EB41-XX-D-CL	-

REF:	SCALE:	SHEET
S00007T	NTS	1 OF 1