

6

5

4

3



2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	

APPROVED: _____

DATE: _____ TITLE: _____

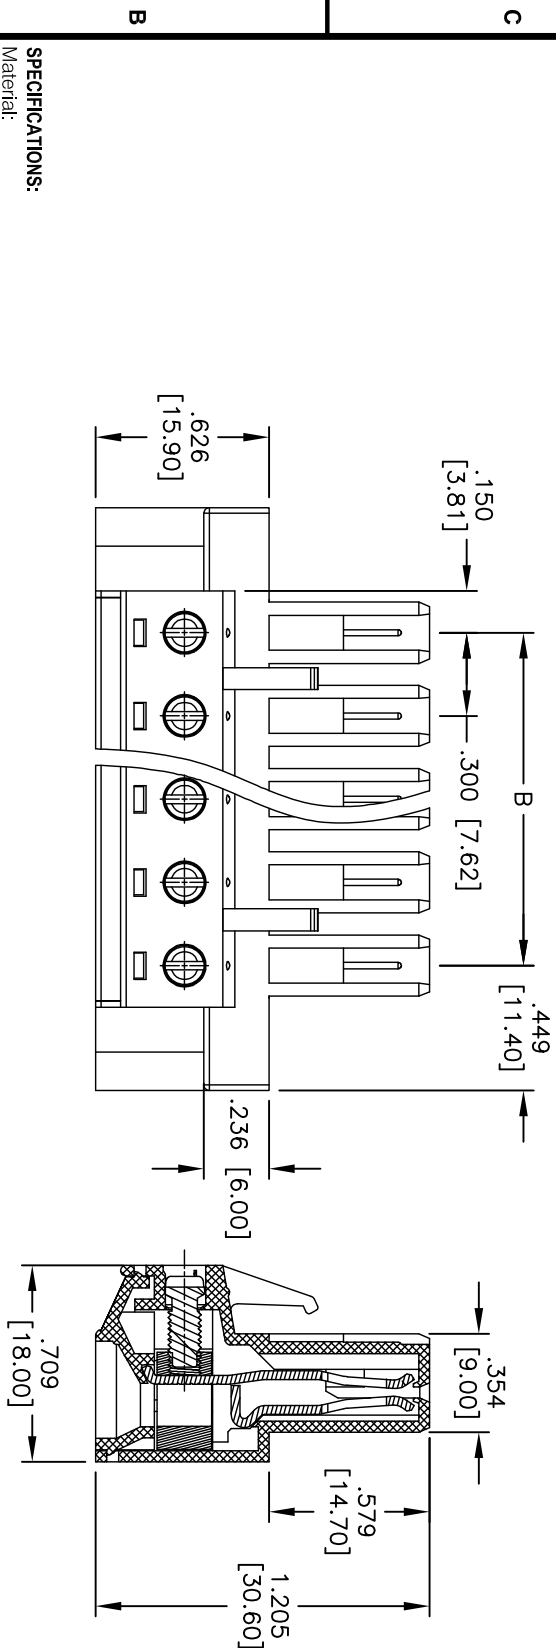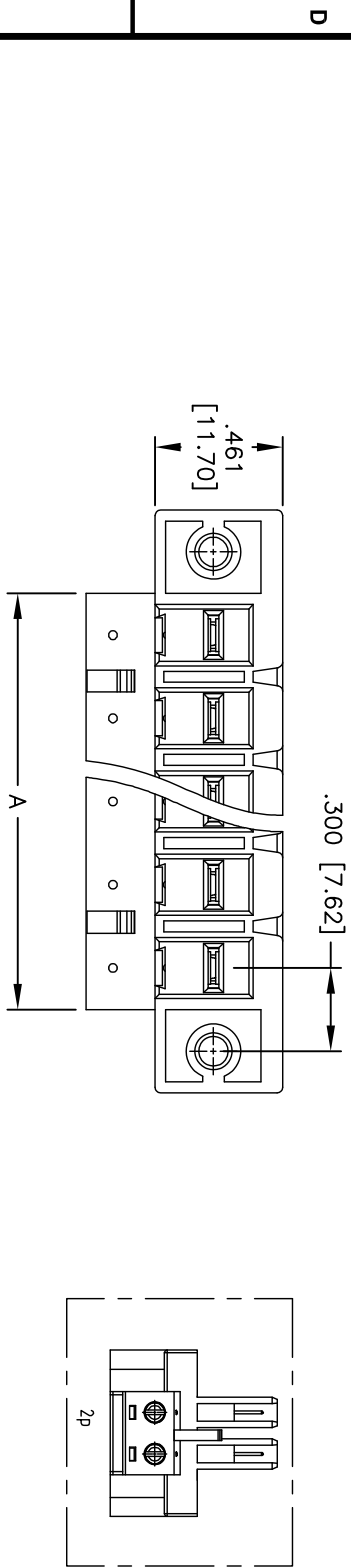

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Clamp: Brass, Nickel plated
- Screw: M3.0, Steel, Zn plated.
- Contact: Copper Alloy, Tin plated.
- Electrical: Operation voltage: 300 VAC
- Current rating: 20 Amps
- Mechanical: Wire strip length: 7-8mm
- Torque (lb-in): 4.5
- Wire Range: 10-30 Awg
- Withstanding Voltage: 1.6KV
- Environmental: Operating temperature: -40°C to +115°C
- Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



Poles: 2 thru 16
A = .300 [7.62] X No. of Positions
B = .300 [7.62] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES		HOLES	
X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	AY	11/30/10	
CHECKED	AH	11/30/10	
APPROVED			

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .300 [7.62] PITCH

SIZE	PART NO.	REV.
X	EB42-XX-G-E	-
REF: S00007T	SCALE: NTS	SHEET 1 OF 1