
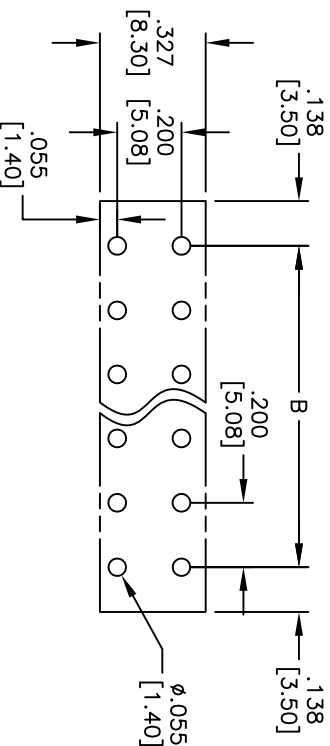
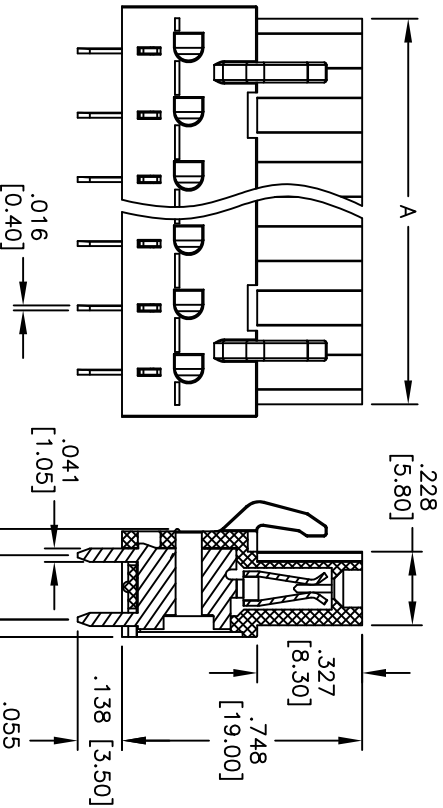



Rev	AWO #	Description	Date	Appr
-	10539	RELEASED	9/14/10	

APPROVED: _____

DATE: _____ TITLE: _____

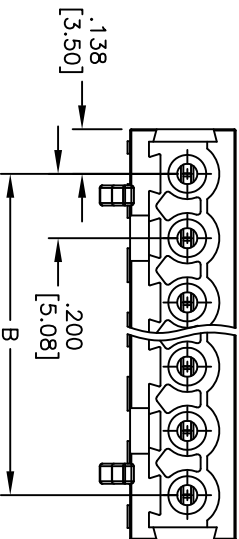

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Green
Wire guard: Phosphor Bronze, Tin plated
Electrical:
Operation voltage: 300 VAC max
Current rating: 10 Amps
Withstanding Voltage: 1.6KV
Environmental:
Operating temperature: -30°C to +105°C
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.



Positions: 2 thru 24
A= .200 [5.08] x No. of Poles
B= .200 [5.08] x No. of (Poles-1)

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TERMINAL BLOCK, PCB, 200 [5.08] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES		Holes		DATE	
.X	± .10	ØX	± .10		
.XX	± .020	ØXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN	DR	9/14/10			
CHECKED					
APPROVED					
SIZE		PART NO.		REV.	
X		EB50-XX-D-180		-	
REF:		S00007T		SCALE: NTS	
				SHEET 1 OF 1	