

| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 2/04/10 | |


APPROVED: _____


DATE: _____ TITLE: _____

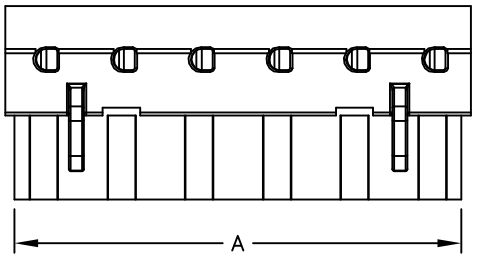


RECOMMENDED PCB LAYOUT

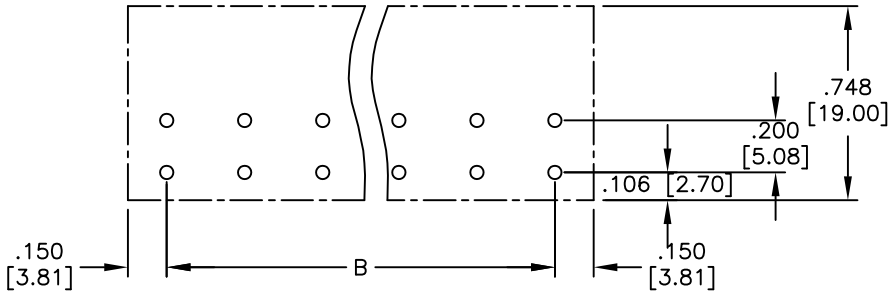

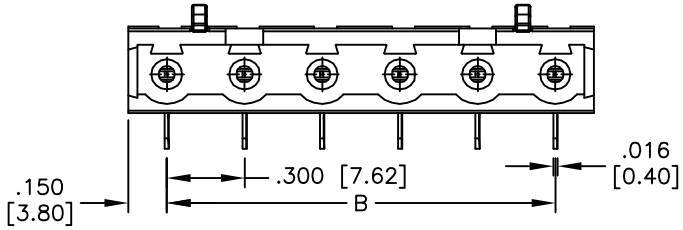
Positions: 2 thru 16
A= .300 [7.62] x No. of (Poles−1) + .221 [5.62]
B= .300 [7.62] x No. of (Poles−1)

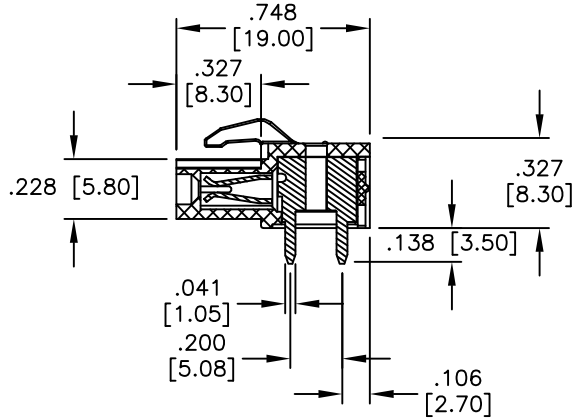SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V−0
Insulator color: Green
Wire guard: Phosphor Bronze, Tin plated
Electrical:
Operation voltage: 300 VAC max
Current rating: 10 Amps
Withstanding Voltage: 1.6KV
Environmental:
Operating temperature: −30°C to +105°C
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | DY | 2/04/10 |
| CHECKED | | |
| APPROVED | | |


**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908−687−5000 Fax: 908−687−5710


TITLE
TERMINAL BLOCK, PCB, .300 [7.62] PITCH

| SIZE | PART NO. | REV. |
|---|---|---|
| X | EB50-XX-D | - |

| REF: | SCALE: | SHEET |
|---|---|---|
| S00007T | NTS | 1 OF 1 |