


EB51F5 Series

- Temperature Compensated Crystal Oscillator (TCXO)
- HCMOS Output
- 5.0V Supply Voltage
- Stability to 1.5ppm
- Internal mechanical trim
- External voltage control option available

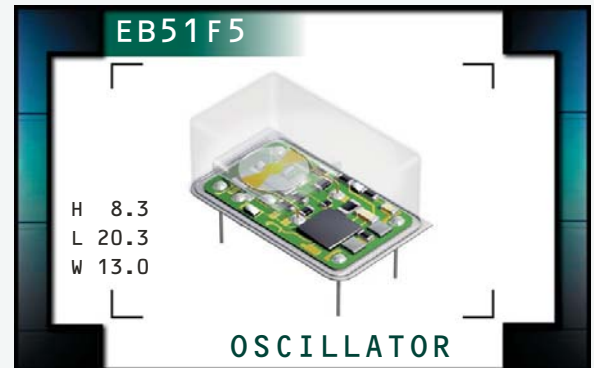

NOTES

ELECTRICAL SPECIFICATIONS

Frequency Range		1.544MHz to 44.736MHz
Operating Temperature Range		See Table 1
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{DD})		5.0V _{DC} ±5%
Input Current	Measured at Steady State at 25°C, at Nominal V_{DD} , at Nominal V_C	15mA Maximum ≤ 20.000MHz, 30mA Maximum > 20.000MHz
Frequency Stability	vs. Initial Frequency Tolerance	±1.0ppm (at Nominal V_{DD} and V_C , at 25°C)
	vs. Operating Temperature Range	See Table 1 (at Nominal V_{DD} and V_C)
	vs. Input Voltage (V_{DD} ±5%)	±0.3ppm Maximum
	vs. Load (±10%)	±0.2ppm Maximum
Aging (at 25°C)		±1ppm / year Maximum
Output Voltage Logic High (V_{OH})		$V_{DD} - 0.5V_{DC}$ Minimum
Output Voltage Logic Low (V_{OL})		0.5V _{DC} Maximum
Rise Time / Fall Time	20% to 80% of Waveform	6 nSeconds Maximum
Duty Cycle	at 50% of Waveform	50 ±5(%)
Load Drive Capability		30pF HCMOS Load Maximum
Control Voltage Range		0.0V _{DC} to V_{DD}
Control Voltage (External)	Positive Transfer Characteristic	2.5V _{DC} ±2.0V _{DC}
Frequency Deviation	Referenced to F_0 at $V_C = 2.5V_{DC}$, $V_{DD} = 5.0V_{DC}$	±7ppm Minimum, ±20ppm Maximum
Linearity		±10% Maximum
Internal Trim	Measured at 25°C, $V_{DD} = 5.0V_{DC}$, $V_C = 2.5V_{DC}$	±3ppm Minimum (Top Access)
Input Impedance		10kOhms Typical
Phase Noise (at 19.440MHz)	Measured at 25°C, at Nominal V_{DD} , at Nominal V_C	
	at 10Hz Offset	-70dBc/Hz Typical
	at 100Hz Offset	-100dBc/Hz Typical
	at 1kHz Offset	-130dBc/Hz Typical
	at 10kHz Offset	-140dBc/Hz Typical
	at 100kHz Offset	-145dBc/Hz Typical

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EB51F5	14-PIN DIP	5.0V	OS3A	06/04

PART NUMBERING GUIDE

EB51F5 G 15 A V - 12.800M - G

INITIAL TOLERANCE

G=±1.0ppm Maximum

FREQUENCY STABILITY

Two Digit Code Per Table 1

OPERATING TEMP. RANGE

One Letter Code Per Table 1

AVAILABLE OPTIONS

Blank=None (Standard)

CB=Cut Leads to 2.540 ±0.500 (0.100" ±0.020")

CC=Cut Leads to 3.175 ±0.500 (0.125" ±0.020")

CD=Cut Leads to 3.810 ±0.500 (0.150" ±0.020")

CE=Cut Leads to 4.445 ±0.500 (0.175" ±0.020")

G=Full Size Gull Wing

FREQUENCY

EXTERNAL TRIM

N=None (No Connection on Pin 1)


V=Voltage Control on Pin 1

TABLE 1: PART NUMBERING CODES

Operating Temperature Range	Code	Frequency Stability			
		X = Available from 1.544MHz to 32.768MHz Y = Available at any Frequency			
		±1.5ppm	±2.0ppm	±3.0ppm	±5.0ppm
0°C to +50°C	A	Y	Y	Y	Y
0°C to 70°C	B	X	Y	Y	Y
-20°C to +70°C	C	X	X	Y	Y
-30°C to +75°C	D		X	Y	Y
-40°C to +85°C	E			X	Y

MECHANICAL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

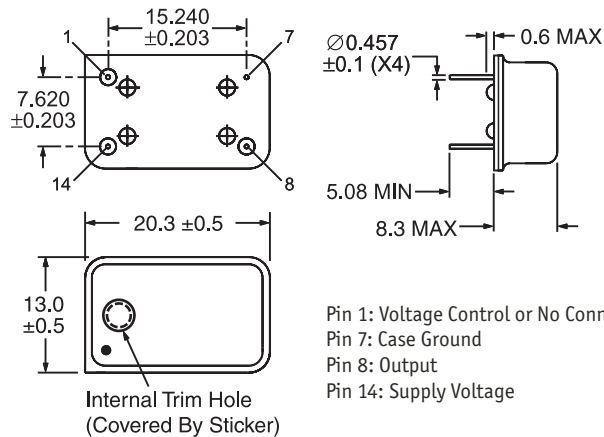

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: XX.XXX M

M=MHz

Frequency (5 Digits Maximum + Decimal)

Line 3: XX YY ZZ

Week of Year

Last Digit of Year

Ecliptek Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic

Fine Leak Test
Gross Leak Test
Mechanical Shock
Vibration
Lead Integrity
Solderability
Temperature Cycling
Resistance to Soldering Heat
Resistance to Solvents

Specification

MIL-STD-883, Method 1014, Condition A (Internal Crystal Only)
MIL-STD-883, Method 1014, Condition C (Internal Crystal Only)
MIL-STD-202, Method 213, Condition C
MIL-STD-883, Method 2007, Condition A
MIL-STD-883, Method 2004
MIL-STD-883, Method 2002
MIL-STD-883, Method 1010
MIL-STD-883, Method 210
MIL-STD-883, Method 215

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EB51F5

PACKAGE
14 pin DIP

VOLTAGE
5.0V

CLASS
OS3A

REV. DATE
06/04