

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/06/09	

APPROVED: _____

DATE: _____ TITLE: _____

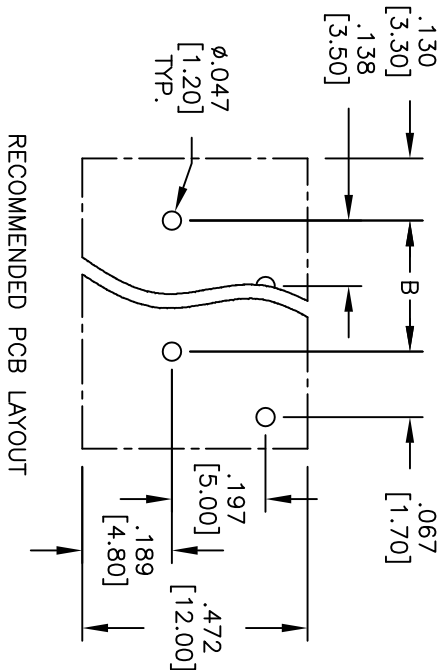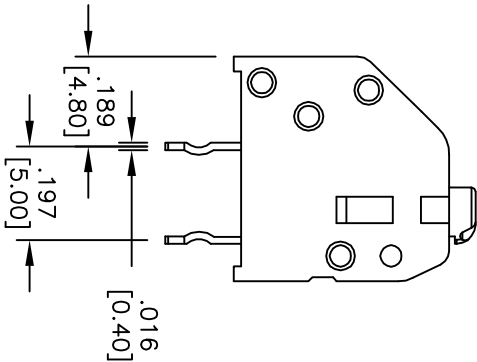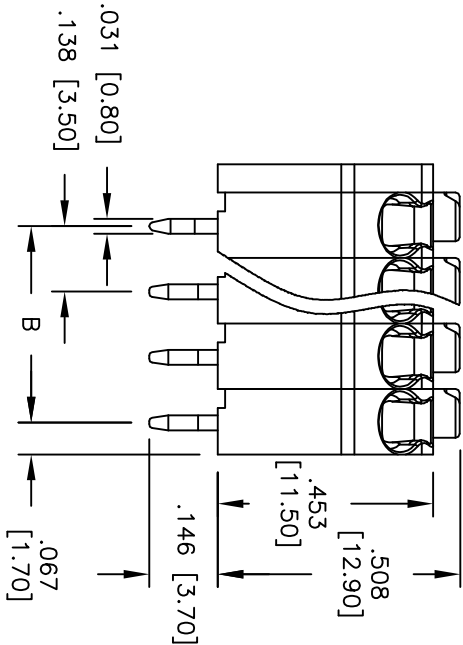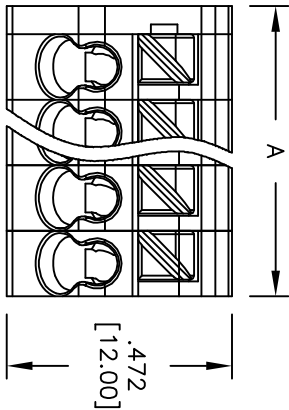

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Gray

Contact: Bronze, Tin plated

Electrical:

Operation voltage: 300 VAC max

Current rating: 6 Amps max per Pole

Mechanical:

Solid wire: 20-16 AWG

Environmental:

Operating temperature: -30°C to +105°C

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



Poles: 2 thru 24
A= .138 [3.50] x No. of Poles + .059 [1.50]
B= .138 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
				.X	± .10	Ø.X	± .10	.XX	± .020	Ø.XX	± .015
				.XXX	± .015	Ø.XXX	± .010				
APPROVALS				DATE							
DRAWN	DR			3/06/09							
CHECKED											
APPROVED											
				SIZE	PART NO.						
				X	EB59-XX-A						
REF:				S00007T	SCALE: NTS						
				SHEET 1 OF 1							

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MINI TYPE, SIMPLE TYPE CAGE CLAMP TERMINAL BLOCKS,
3.50MM PITCH