


EC27 Series

- RoHS Compliant (Pb-Free)
- LVHCMOS output
- 2.5V Supply Voltage
- Ceramic SMD package
- Stability to ± 20 ppm
- Standby Function
- Available on Tape and Reel



ECLIPTEK
CORPORATION

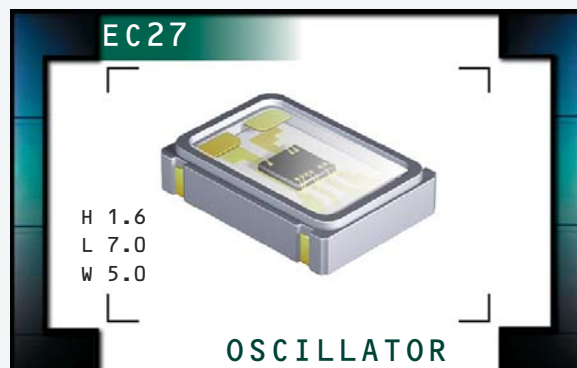

ELECTRICAL SPECIFICATIONS

Frequency Range (F_0)	1.544MHz to 125.000MHz, 125.009MHz, 125.00937MHz, 125.010MHz, 127.000MHz, 128.000MHz, 130.000MHz, 132.000MHz, 133.000MHz, 133.333MHz, 137.472MHz, 142.850MHz, and 150.000MHz	
Operating Temperature Range (OTR)	0°C to 70°C or -40°C to 85°C	
Storage Temperature Range (STR)	-55°C to 125°C	
Supply Voltage (V_{DD})	2.5V _{DC} $\pm 5\%$	
Input Current (I_{DD})	1.544MHz to 9.999MHz	3mA Maximum
	10.000MHz to 24.999MHz	5mA Maximum
	25.000MHz to 34.999MHz	8mA Maximum
	35.000MHz to 49.999MHz	15mA Maximum
	50.000MHz to 69.999MHz	20mA Maximum
	70.000MHz to 110.000MHz	25mA Maximum
	110.001MHz to 125.000MHz	35mA Maximum
	125.001MHz to 150.000MHz	45mA Maximum
Frequency Tolerance/Stability	Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, First Year Aging at 25°C, Shock, and Vibration	± 100 ppm, ± 50 ppm, ± 25 ppm, or ± 20 ppm
Output Voltage Logic High (V_{OH})	90% of V_{DD} Minimum $I_{OH} = -8$ mA	
Output Voltage Logic Low (V_{OL})	10% of V_{DD} Maximum $I_{OL} = +8$ mA	
Rise Time / Fall Time (T_R/T_F)	20% to 80% of Waveform, 1.544MHz to 24MHz	6 nSeconds Maximum
	20% to 80% of Waveform, 24.001MHz to 110MHz	4 nSeconds Maximum
	20% to 80% of Waveform, 110.001MHz to 150MHz	2 nSeconds Maximum
Duty Cycle (SYM)	50% of Waveform	50 ± 10 (%) (Standard)
	50% of Waveform (at 25°C, at Vdd=2.5Vdc over >125MHz)	50 ± 5 (%) (Optional)
Load Drive Capability (C_{LOAD})	15pF HCMOS Load Maximum	
Tri-State Input Voltage	No Connection	Enables Output
	$V_{IH} \geq 90\%$ of V_{DD}	Enables Output
	$V_{IL} \leq 10\%$ of V_{DD}	Disables Output: High Impedance
Standby Current	Disabled Output: High Impedance	10 μ A Maximum
Aging (at 25°C)	± 5 ppm/year Maximum	
Start Up Time (T_S)	10 mSeconds Maximum	
RMS Phase Jitter	12kHz to 20MHz offset frequency	1pSeconds Maximum

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EC27

PACKAGE
CERAMIC

VOLTAGE
2.5V

CLASS
OS52

REV. DATE
11/06

PART NUMBERING GUIDE

EC27 00 ET TS - 30.000M TR

FREQUENCY TOLERANCE / STABILITY

00=±100ppm Maximum (Standard)
45=±50ppm Maximum, 25=±25ppm Maximum
20=±20ppm Maximum

OPERATING TEMPERATURE RANGE

Blank=0°C to 70°C (Standard)
ET=-40°C to 85°C

PACKAGING OPTIONS

Blank=Bulk (Standard)
TR=Tape and Reel


FREQUENCY

DUTY CYCLE

Blank=50 ±10(%) (Standard)
T=50 ±5(%)

MECHANICAL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

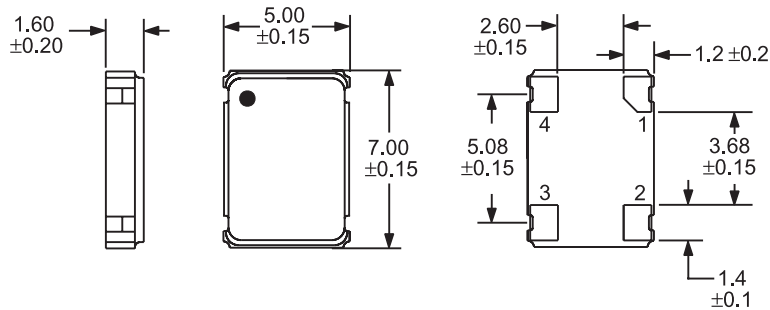


Pin 1: Tri-State
Pin 2: Case Ground

Pin 3: Output
Pin 4: Supply Voltage


SUGGESTED SOLDER PAD LAYOUT

ALL DIMENSIONS IN MILLIMETERS

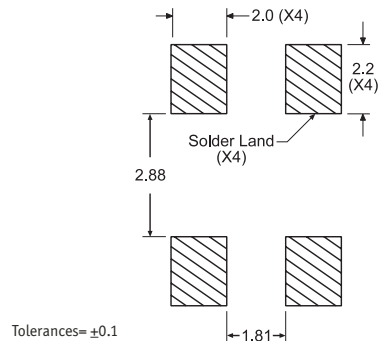


TAPE AND REEL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

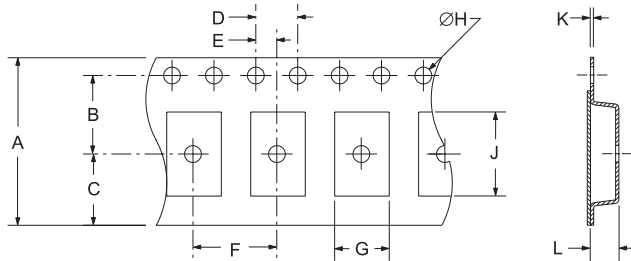

TAPE	A	B	C	D	E
	16±.3-.1	7.5±.1	6.75±.1	4±.1	2±.1
F	G	H	J	K	L
8±.1	B0*	1.5 +.1-0	A0*	.3 ±.05	K0*

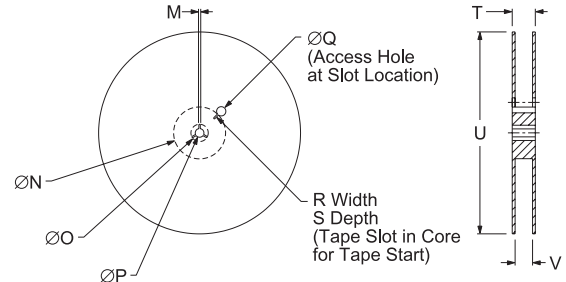

REEL	M	N	O	P	Q
	1.5 MIN	50 MIN	20.2 MIN	13±.2	40 MIN
R	S	T	U	V	QTY/REEL
2.5 MIN	10 MIN	22.4 MAX	360 MAX	16.4±2-0	1,000

*Compliant to EIA 481A

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic

Fine Leak Test
Gross Leak Test
Mechanical Shock
Vibration
Solderability
Temperature Cycling
Resistance to Soldering Heat
Resistance to Solvents

Specification

MIL-STD-883, Method 1014, Condition A
MIL-STD-883, Method 1014, Condition C
MIL-STD-202, Method 213, Condition C
MIL-STD-883, Method 2007, Condition A
MIL-STD-883, Method 2002
MIL-STD-883, Method 1010
MIL-STD-202, Method 210
MIL-STD-202, Method 215

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: XX.XXX M

Frequency in MHz (5 Digits Maximum + Decimal)

Line 3: XX YY ZZ

Week of Year
Last Digit of Year
Eclipse Manufacturing Identifier

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EC27	CERAMIC	2.5V	OS52	11/06




ECLIPTEK®
CORPORATION

Ecliptek
MEMS Oscillators

Ecliptek MEMS Oscillators

- Lower Cost, Quicker Delivery Alternative!

The EMO™ family of oscillators offers exceptional performance, shorter delivery and significant cost advantages by utilizing a revolutionary new MEMS resonator technology. This important innovation enables Ecliptek to offer the ultimate in flexibility with delivery of 2 days for samples and 5 to 10 days for quantities up to 10,000 pieces on tape and reel.



Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EMK11	EMK21	EMK31	EMK41
2.5	EMK12	EMK22	EMK32	EMK42
3.3	EMK13	EMK23	EMK33	EMK43

Would you like to request EMO™ samples or a quotation now?

[Click Here](#)

Want to learn more about the Ecliptek EMO™ family of MEMS oscillators?

[Click Here](#)

Product Features:

- Improved frequency stability through the use of a MEMS resonator
- 1.8VDC, 2.5VDC, or 3.3VDC supply voltages
- Frequency range of 1MHz to 125MHz, HCMOS output
- Frequency stability to ±50ppm, -40°C to +85°C operation
- Tri-state or power down functions
- RoHS compliant
- High temperature +260°C reflow capability
- EIA compliant tape and reel packaging
- Four SMD package sizes

If you have any questions or would like additional information regarding the Ecliptek EMO™ family of oscillators, please contact our [Sales Department](#).