
ECB-910M

XTX Carrier Board

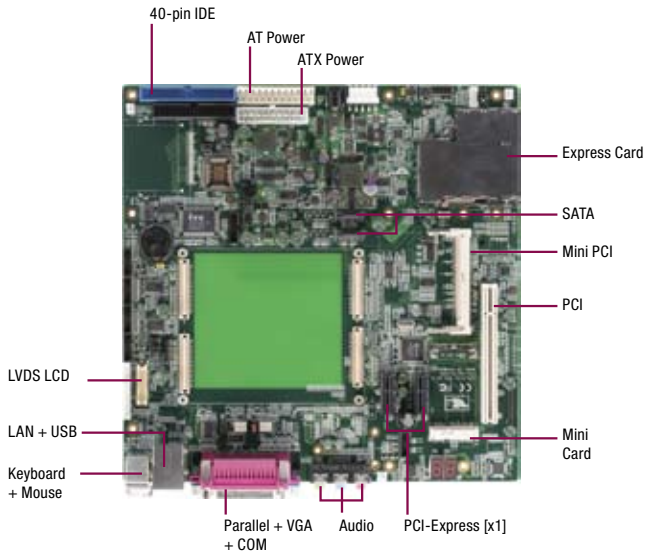

Features

- **Supports XTX Module**
- **RJ-45 x 1, Supports 10/100Base-TX Ethernet**
- **VGA, LVDS Connector**
- **5.1 Channel Audio (Optional)**
- **PATA Connector x 1, SATA Port x 2**
- **USB Port x 3, COM Port x 4**
- **PCI Express [x1] Slot x 2, PCI Slot x 1**
- **ExpressCard Slot x 1, Mini PCI Slot x 1, Mini Card Slot x 1, LPC Connector x 1**
- **AT/ ATX Power Input**
- **MicroATX Form Factor**

Specifications

System	
Form Factor	MicroATX
I/O Chipset	ITE IT8712KX
Ethernet	10/100Base-TX, RJ-45 x 1
Expansion Interface	PCI-Express [x1] Slot x 2 PCI Slot x 1 ExpressCard slot x 1 Mini PCI slot x 1 Mini Card slot x 1 LPC Connector x 1
Power Supply Type	AT/ ATX
Board Size	9.6" x 9.6" (243.8mm x 243.8mm)
Gross Weight	1.32 lb (0.6 Kg)
Operating Temperature	32˚F ~ 140˚F (0˚C ~ 60˚C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	60,000
Display	
VGA	DB15 connector x 1
LVDS	30-pin (15x2) dual-channel LVDS connector x 1
I/O	
Storage	PATA connector x 1 SATA Port x 2
Serial Port	RS-232 port x 3 (9-pin D-Sub connector x 1 + 5x2-pin box header x 2) RS-232/422/485 port x 1 (5x2-pin box header)
Parallel Port	DB25 connector x 1, supports SPP/ EPP/ ECP mode
USB	Type A connector x 2, Wafer x 1
PS/2 Port	Keyboard x 1, Mouse x 1
Digital I/O	Supports 8-bit (Programmable)
IrDA	One IrDA Tx/Rx header
Audio	Audio jack, supports 5.1 channel audio

Packing List

- **9681910M00**
  Cable Kit
  1701400453 IDE Cable x 1
  1709070780 SATA Cable x 1
  1701340704 FDD Cable x 1
  1701100207 FPC x 1
- **Quick Installation Guide**
- **ECB-910M**


AAEON an ASUS assoc. co.

Note: All specifications are subject to change without notice.

ECB-910M

Dimension

Unit: mm

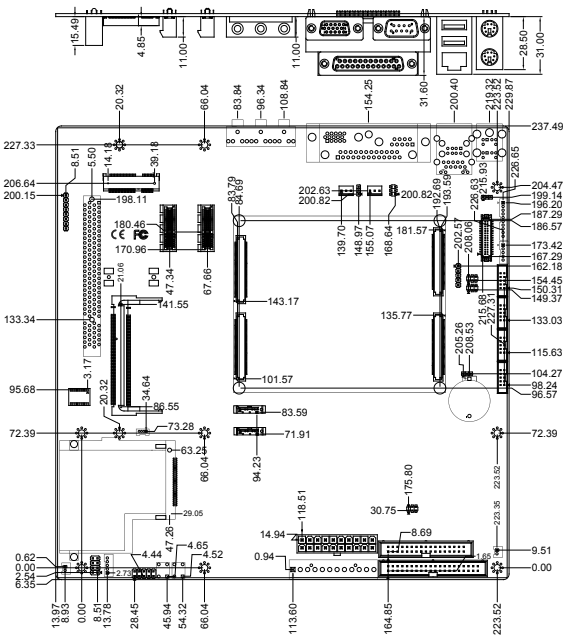

Ordering Information

- **TF-ECB-910M-A10**
  XTX Carrier Board, LAN, Audio, 4 COM, USB, PCI-E, 2 SATA, AT/ATX, Rev. A1.0
- **TF-ECB-910M-A10-01**
  XTX Carrier Board, LAN, Audio, 4 COM, USB, PCI-E, 2 SATA, TPM, AT/ATX, Rev. A1.0
- **TF-ECB-910M-A10-02**
  XTX Carrier Board, LAN, Audio, 2 COM, USB, PCI-E, 2 SATA, AT/ATX, Rev. A1.0