ECX-1000-PoE

9th Generation Intel® Xeon®/Core™ i7/i5/i3 (Coffee Lake Refresh) Fanless Embedded System with Intel® C246 Chipset, 6 GigE LAN with 4 PoE+, 6 USB 3.1, 2 M.2 Socket, Isolated DIO, High Performance, Rugged, -40°C to 75°C Extended Temperature



Features

- 8 Cores 9th Generation Intel® Xeon®/Core™ i7/i5/i3 Processor (Coffee Lake Refresh) with Intel® C246 Chipset
- Fanless, -40°C to 75°C Operating Temperature
- 6 Independent GigE LAN with 4 IEEE 802.3at PoE+
- SIM Sockets for WiFi/4G/3G/LTE/GPRS/UMTS
- 2 SIM Socket, 1 CFast Socket, 2 M.2 Socket
- 6 USB 3.1, 4 COM RS-232/422/485, 16 Isolated DIO
- Expansion : SUMIT A, B, M.2, up to 5 Mini PCIe
- 6V to 36V DC Power Input with 80V Surge Protection
- Configurable Ignition Power Control


Specifications

System	
Processor	Intel® Xeon®/Core™ i7/i5/i3 Processor (CFL-R S/CFL-S)
Chipset	Intel® C246
BIOS	AMI
SIO	IT8786E
Memory	2 DDR4 2666MHz SO-DIMM, up to 64GB (ECC/Non-ECC)
I/O Interface	
Serial	4 COM RS-232/422/485 (ESD 8KV)
USB	▪ 6 USB 3.1 (6 External) ▪ 1 USB 2.0 (Internal)
Isolated DIO	16 Isolated DIO : 8 DI, 8 DO
LED	Power, HDD, PoE, Wireless
SIM Card	2 External SIM Card Socket
Expansion	
Mini PCIe	2 Full-size Mini PCIe Socket for PCIe/USB/External SIM Card/ mSATA
M.2	1 M.2 Key E Socket
SUMIT A, B	2 SUMIT Slot (Optional)
Graphics	
Graphics Processor	Intel® UHD Graphics 630
Interface	▪ DVI-I : Up to 1920 x 1200 @60Hz ▪ DVI-D : Up to 1920 x 1080 @60Hz ▪ DisplayPort : Up to 4096 x 2304 @60Hz
Storage	
SATA	2 SATA III (6Gbps) support S/W RAID 0, 1
mSATA	2 SATA III (Mini PCIe Type, 6Gbps)
Storage Device	▪ 1 CFast Socket, Push-in/Push-out Ejector ▪ 2 2.5" SSD/HDD Bracket (Internal) ▪ 1 M.2 Key M Socket
Audio	
Audio Codec	Realtek ALC892, 5.1 Channel HD Audio
Audio Interface	1 Mic-in, 1 Line-out
Ethernet	
LAN 1	Intel® I219LM GigE LAN supports iAMT 12.0
LAN 2	Intel® I210 GigE LAN
PoE	
LAN 3 to 6	GigE IEEE 802.3at (25.5W/48V) PoE+ by Intel® I210 with Power On/Off Control


Power	
Power Input	6V to 36V, DC-in
Power Interface	3-pin Terminal Block : V+, V-, Frame Ground
Ignition Control	16 Mode (Internal)
Remote Switch	3-pin Terminal Block : On, Off, IGN
Surge Protection	Up to 80V/1ms Transient Power
Others	
TPM	Optional Infineon SLB9665 supports TPM 2.0, LPC Interface
Watchdog Timer	Reset : 1 to 255 sec./min. per step
Smart Management	Wake on LAN, PXE supported
HW Monitor	Monitoring temperature, voltages. Auto throttling control when CPU overheats.
Software Support	
OS	Windows 10, Linux
Mechanical	
Dimensions (W x L x H)	260mm x 175mm x 79mm (10.2" x 6.9" x 3.1")
Weight	3.8 kg (8.38 lb)
Mounting	▪ Wallmount by mounting bracket ▪ DIN Rail Mount (Optional) ▪ 2U Rackmount (Optional)
Environment	
Operating Temperature	35W TDP CPU : -40°C to 75°C (-40°F to 167°F) 65W TDP CPU : -40°C to 55°C (-40°F to 131°F) 80W TDP CPU : -40°C to 45°C (-40°F to 113°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @ 75°C
Shock	▪ IEC 60068-2-27 ▪ SSD : 50G @ wallmount, Half-sine, 11ms
Vibration	▪ IEC 60068-2-64 ▪ SSD : 5Grms, 5Hz to 500Hz, 3 Axis
EMC	CE, FCC, EN50155, EN50121-3-2

Dimensions


Unit : mm/ inch

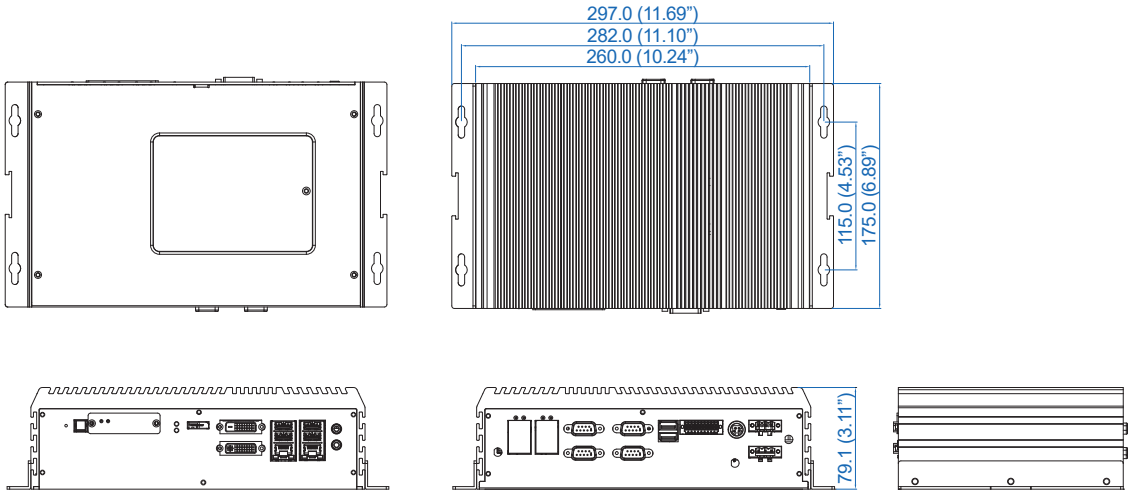

Front I/O

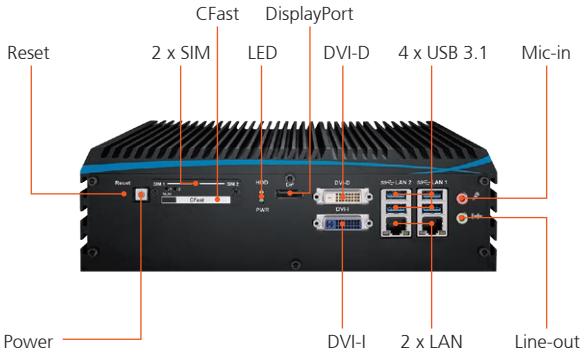

Rear I/O

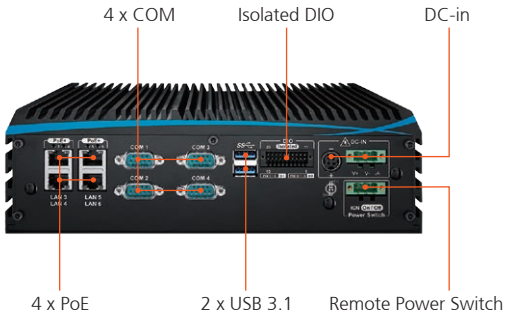

Order Information

ECX-1000-PoER	ECX-1000, 6 GigE LAN w/4 PoE+, 4 COM, 2 SIM, 6 USB 3.1, 16 Isolated DIO

Accessories

DDR4 32G	Certified DDR4 32GB 2666MHz RAM
DDR4 16G	Certified DDR4 16GB 2666MHz RAM
DDR4 8G	Certified DDR4 8GB 2666MHz RAM
DDR4 4G	Certified DDR4 4GB 2666MHz RAM
PWA-120W	120W, 24V, 90VAC to 264VAC Power Adapter with 3-pin Terminal Block
PWA-160W-WT	160W, 24V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
PWA-280W-WT	280W, 24V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
VESA Mount	VESA Mounting Kit
DIN-RAIL	DIN Rail Kit
Rack Mount	2U Rackmount Kit
TMK2-20P-100	Terminal Block 20-pin to Terminal Block 20-pin Cable, 100cm
TMK2-20P-500	Terminal Block 20-pin to Terminal Block 20-pin Cable, 500cm
TMB-TMBK-20P	Terminal Board with One 20-pin Terminal Block Connector and DIN-Rail Mounting
4G Module	Mini PCIe 4G/GPS Module with Antenna
WiFi & Bluetooth	WiFi & Bluetooth Module with Antenna

CPU List

Series	CPU	Cores	GHz	TDP (W)	ECC RAM
Intel® Xeon®	E-2176G	6	4.6	80	Yes
	E-2124G	4	4.5	71	
	E-2278GE	8	4.7	80	
	E-2278GEL	8	3.9	35	
	E-2226GE	6	4.6	80	
Intel® Core™	i7-8700	6	4.6	65	N/A
	i7-8700T	6	4	35	
	i7-9700E	8	4.4	65	
	i7-9700TE	8	3.8	35	
	i5-8500	6	4.1	65	
	i5-8500T	6	3.5	35	
	i5-9500E	6	4.2	65	
	i5-9500TE	6	3.6	35	
	i3-8100	4	3.6	65	Yes
	i3-8100T	4	3.1	35	
	i3-9100E	4	3.7	65	
	i3-9100TE	4	3.2	35	

* The rights of all brand names, product names and trademarks belong to their respective owners.
Copyright © 2019 Vecow Co., Ltd. All rights reserved.