

Snap-in Type

Series: ED Type : TS

Country of Origin

- Features
- Endurance: 105°C 3000h
 - High ripple current capability in high frequency range.
 - High ripple current and miniaturization to help miniaturization of equipment.
 - RoHS directive compliant


Japan
U.S.A
Malaysia



■ Specifications

Category temp. range	-40 to +105°C				-25 to +105°C				
Rated W.V. Range	200,220,250 V.DC				400, 420, 450 V .DC				
Nominal Cap. Range	220 to 2200 μF				56 to 560 μ F				
Capacitance Tolerance	±20 % (120Hz/+20°C)								
DC Leakage Current	3√CV (μA) max. after 5 minutes application of rated working voltage at +20°C C:Capacitance(μF) V: W.V. (V.DC)								
tan δ	Please see the attached standard products list								
Frequency Correction Factor for Ripple Current	Frequency (Hz)	50	60	100	120	500	1k	10k to	
	Correction Factor	0.5	0.55	0.68	0.70	0.85	0.90	1.00	
Endurance	After 3000 hours application of DC voltage with specified ripple current (≤ rated DC working voltage) at +105°C, the capacitor shall meet the following limits.								
	Capacitance change	±20 % of initial measured value							
	tan δ	≤ 200 % of initial specified value							
	DC leakage current	≤ initial specified value							
Shelf Life	After storage for 1000 hours at +105±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in Endurance(With voltage treatment)								

■ Dimensions in mm (not to scale)

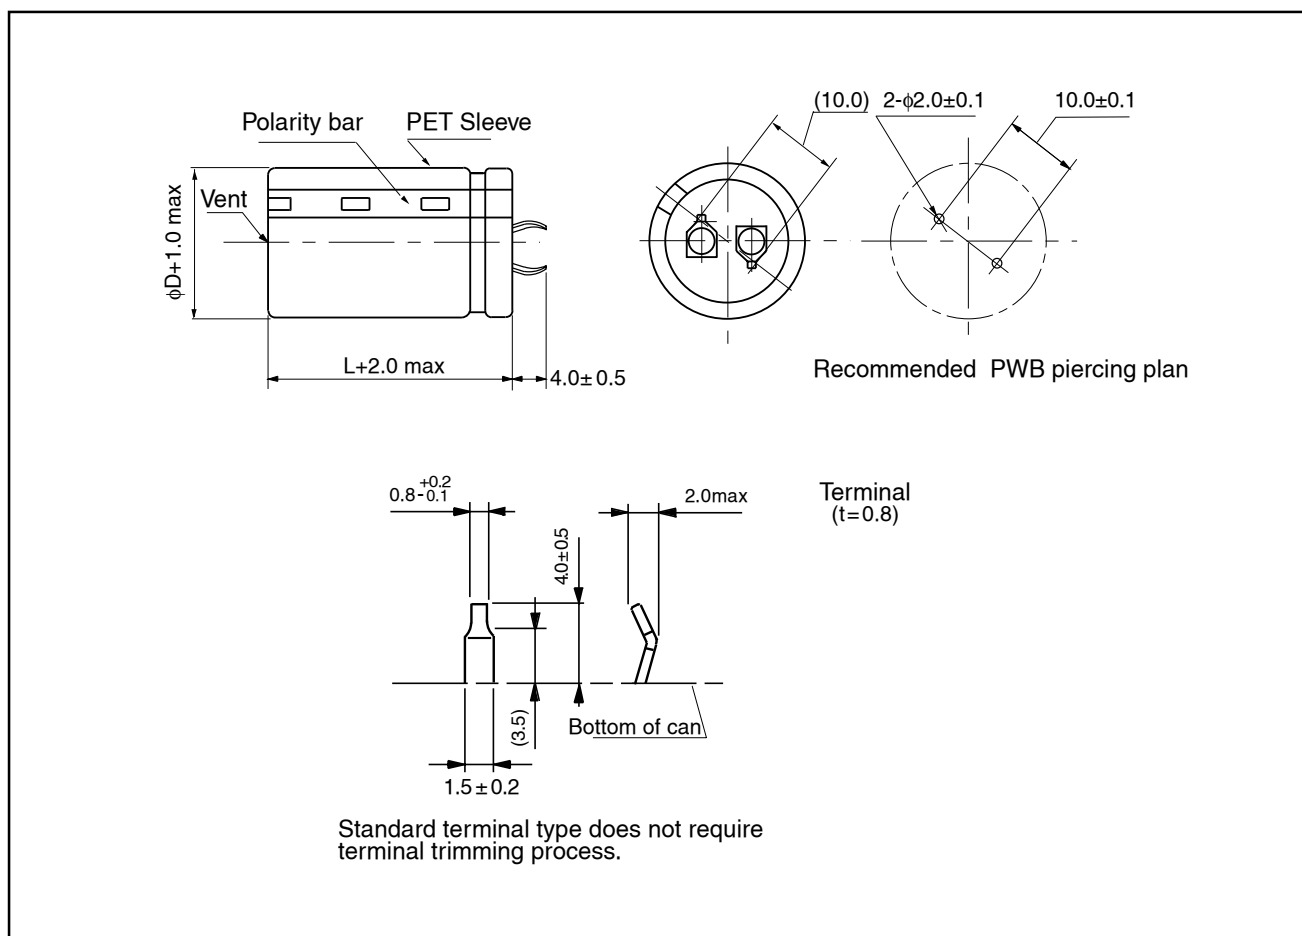

■ Standard Products

W.V. (V)	Cap. ($\pm 20\%$) (μF)	Case size		Specification		Part No. PET sleeve Terminal Length 4.0mm (Without P.V.C.plate)	MirPackagingQty (pcs)
		Dia. (mm)	Length (mm)	Ripple current (50kHz) (+105°C) (A)	$\tan \delta$ (120Hz) (+20°C)		
200	270	22	25	2.03	0.15	EETED2D271HJ	200
	330	22	30	2.23	0.15	EETED2D331HJ	200
	390	22	30	2.44	0.15	EETED2D391HJ	200
		25	25	2.44	0.15	EETED2D391JJ	200
	470	22	35	2.64	0.15	EETED2D471HJ	200
		25	30	2.64	0.15	EETED2D471JJ	200
	560	22	40	3.05	0.15	EETED2D561HJ	200
		25	30	3.05	0.15	EETED2D561JJ	200
		30	25	3.05	0.15	EETED2D561KJ	200
	680	22	45	3.45	0.15	EETED2D681HJ	200
		25	35	3.45	0.15	EETED2D681JJ	200
		30	30	3.45	0.15	EETED2D681KJ	200
	820	22	50	3.76	0.15	EETED2D821HJ	200
		25	40	3.76	0.15	EETED2D821JJ	200
		30	30	3.76	0.15	EETED2D821KJ	200
		35	25	3.76	0.15	EETED2D821LJ	200
	1000	25	45	4.06	0.15	EETED2D102JJ	200
		30	35	4.06	0.15	EETED2D102KJ	100
		35	30	4.06	0.15	EETED2D102LJ	200
	1200	30	40	4.47	0.15	EETED2D122KJ	100
		35	35	4.47	0.15	EETED2D122LJ	100
	1500	30	50	5.08	0.15	EETED2D152KJ	100
		35	40	5.08	0.15	EETED2D152LJ	100
	1800	35	45	5.48	0.15	EETED2D182LJ	100
	2200	35	50	5.89	0.15	EETED2D222LJ	100
220	270	22	30	2.03	0.15	EETED2Q271HJ	200
	330	22	30	2.23	0.15	EETED2Q331HJ	200
		25	25	2.23	0.15	EETED2Q331JJ	200
	390	22	35	2.44	0.15	EETED2Q391HJ	200
		25	30	2.44	0.15	EETED2Q391JJ	200
	470	22	40	2.64	0.15	EETED2Q471HJ	200
		25	30	2.64	0.15	EETED2Q471JJ	200
		30	25	2.64	0.15	EETED2Q471KJ	200
	560	22	45	3.05	0.15	EETED2Q561HJ	200
		25	35	3.05	0.15	EETED2Q561JJ	200
		30	30	3.05	0.15	EETED2Q561KJ	200
	680	25	40	3.45	0.15	EETED2Q681JJ	200
		30	30	3.45	0.15	EETED2Q681KJ	200
		35	25	3.45	0.15	EETED2Q681LJ	200
	820	25	45	3.76	0.15	EETED2Q821JJ	200
		30	35	3.76	0.15	EETED2Q821KJ	100

Endurance : 105°C 3000h

Terminal Pitch : 10mm

When capacitors of $\phi 35 \times 45\text{L}$ and $\phi 35 \times 50\text{L}$ are mounted on PWB, reinforce them with mounting clamp or adhesives.(Avoid using adhesives including halogenated compositions.)

■ Standard Products

W.V. (V)	Cap. ($\pm 20\%$) (μF)	Case size		Specification		Part No.	MinPackagingQty
		Dia. (mm)	Length (mm)	Ripple current (50kHz) (+105°C) (A)	$\tan \delta$ (120Hz) (+20°C)	PET sleeve Terminal Length 4.0mm (Without P.V.C.plate)	(pcs)
220	820	35	30	3.76	0.15	EETED2Q821LJ	200
	1000	30	40	4.06	0.15	EETED2Q102KJ	100
		35	35	4.06	0.15	EETED2Q102LJ	100
	1200	30	45	4.47	0.15	EETED2Q122KJ	100
		35	40	4.47	0.15	EETED2Q122LJ	100
	1500	35	45	5.08	0.15	EETED2Q152LJ	100
	1800	35	50	5.48	0.15	EETED2Q182LJ	100
250	220	22	30	1.83	0.15	EETED2E221HJ	200
	270	22	30	2.03	0.15	EETED2E271HJ	200
		25	25	2.03	0.15	EETED2E271JJ	200
	330	22	35	2.23	0.15	EETED2E331HJ	200
		25	30	2.23	0.15	EETED2E331JJ	200
	390	22	40	2.44	0.15	EETED2E391HJ	200
		25	30	2.44	0.15	EETED2E391JJ	200
		30	25	2.44	0.15	EETED2E391KJ	200
	470	22	45	2.64	0.15	EETED2E471HJ	200
		25	35	2.64	0.15	EETED2E471JJ	200
		30	30	2.64	0.15	EETED2E471KJ	200
	560	25	40	3.05	0.15	EETED2E561JJ	200
		30	30	3.05	0.15	EETED2E561KJ	200
		35	25	3.05	0.15	EETED2E561LJ	200
	680	25	45	3.45	0.15	EETED2E681JJ	200
		30	35	3.45	0.15	EETED2E681KJ	100
		35	30	3.45	0.15	EETED2E681LJ	200
	820	30	40	3.76	0.15	EETED2E821KJ	100
		35	35	3.76	0.15	EETED2E821LJ	100
	1000	30	50	4.06	0.15	EETED2E102KJ	100
		35	40	4.06	0.15	EETED2E102LJ	100
	1200	35	45	4.47	0.15	EETED2E122LJ	100
	1500	35	50	5.08	0.15	EETED2E152LJ	100
400	82	22	25	1.14	0.15	EETED2G820HJ	200
	100	22	30	1.30	0.15	EETED2G101HJ	200
		25	25	1.30	0.15	EETED2G101JJ	200
	120	22	35	1.46	0.15	EETED2G121HJ	200
		25	30	1.46	0.15	EETED2G121JJ	200
	150	22	40	1.53	0.15	EETED2G151HJ	200
		25	30	1.53	0.15	EETED2G151JJ	200
		30	25	1.53	0.15	EETED2G151KJ	200
	180	22	45	1.60	0.15	EETED2G181HJ	200
		25	35	1.60	0.15	EETED2G181JJ	200
		30	30	1.60	0.15	EETED2G181KJ	200

Endurance : 105°C 3000h

Terminal Pitch : 10mm

When capacitors of $\phi 35 \times 45\text{L}$ and $\phi 35 \times 50\text{L}$ are mounted on PWB, reinforce them with mounting clamp or adhesives.(Avoid using adhesives including halogenated compositions.)

■ Standard Products

W.V. (V)	Cap. ($\pm 20\%$) (μF)	Case size		Specification		Part No. PET sleeve Terminal Length 4.0mm (Without P.V.C.plate)	MirPackagingQty (pcs)
		Dia. (mm)	Length (mm)	Ripple current (50kHz) (+105°C) (A)	$\tan \delta$ (120Hz) (+20°C)		
400	220	22	50	2.03	0.15	EETED2G221HJ	200
		25	40	2.03	0.15	EETED2G221JJ	200
		30	30	2.03	0.15	EETED2G221KJ	200
		35	25	2.03	0.15	EETED2G221LJ	200
	270	25	45	2.23	0.15	EETED2G271JJ	200
		30	35	2.23	0.15	EETED2G271KJ	100
		35	30	2.23	0.15	EETED2G271LJ	200
	330	30	40	2.44	0.15	EETED2G331KJ	100
		35	30	2.44	0.15	EETED2G331LJ	200
	390	30	45	2.64	0.15	EETED2G391KJ	100
		35	35	2.64	0.15	EETED2G391LJ	100
	470	35	40	2.84	0.15	EETED2G471LJ	100
420	560	35	45	3.05	0.15	EETED2G561LJ	100
	68	22	25	1.08	0.15	EETED2S680HJ	200
		22	30	1.14	0.15	EETED2S820HJ	200
	82	25	25	1.14	0.15	EETED2S820JJ	200
		22	30	1.30	0.15	EETED2S101HJ	200
	100	25	25	1.30	0.15	EETED2S101JJ	200
		22	35	1.46	0.15	EETED2S121HJ	200
	120	25	30	1.46	0.15	EETED2S121JJ	200
		22	40	1.53	0.15	EETED2S151HJ	200
	150	25	35	1.53	0.15	EETED2S151JJ	200
		30	25	1.53	0.15	EETED2S151KJ	200
		22	45	1.60	0.15	EETED2S181HJ	200
	180	25	40	1.60	0.15	EETED2S181JJ	200
		30	30	1.60	0.15	EETED2S181KJ	200
		35	25	1.60	0.15	EETED2S181LJ	200
		25	45	2.03	0.15	EETED2S221JJ	200
	220	30	35	2.03	0.15	EETED2S221KJ	100
		35	30	2.03	0.15	EETED2S221LJ	200
		25	50	2.40	0.15	EETED2S271JJ	200
	270	30	40	2.40	0.15	EETED2S271KJ	100
		35	30	2.40	0.15	EETED2S271LJ	200
		30	45	2.54	0.15	EETED2S331KJ	100
	330	35	35	2.54	0.15	EETED2S331LJ	100
		30	50	2.73	0.15	EETED2S391KJ	100
	390	35	40	2.73	0.15	EETED2S391LJ	100
		35	45	3.18	0.15	EETED2S471LJ	100
450	56	22	25	0.95	0.15	EETED2W560HJ	200
	68	22	30	1.08	0.15	EETED2W680HJ	200
		25	25	1.08	0.15	EETED2W680JJ	200

Endurance : 105°C 3000h

Terminal Pitch : 10mm

When capacitors of $\phi 35 \times 45\text{L}$ and $\phi 35 \times 50\text{L}$ are mounted on PWB, reinforce them with mounting clamp or adhesives.(Avoid using adhesives including halogenated compositions.)

■ Standard Products

W.V. (V)	Cap. ($\pm 20\%$) (μF)	Case size		Specification		Part No. PET sleeve Terminal Length 4.0mm (Without P.V.C.plate)	MirPackagingQty (pcs)
		Dia. (mm)	Length (mm)	Ripple current (50kHz) (+105°C) (A)	$\tan \delta$ (120Hz) (+20°C)		
450	82	22	30	1.14	0.15	EETED2W820HJ	200
		25	25	1.14	0.15	EETED2W820JJ	200
	100	22	35	1.30	0.15	EETED2W101HJ	200
		25	30	1.30	0.15	EETED2W101JJ	200
	120	22	40	1.46	0.15	EETED2W121HJ	200
		25	35	1.46	0.15	EETED2W121JJ	200
		30	25	1.46	0.15	EETED2W121KJ	200
	150	22	45	1.53	0.15	EETED2W151HJ	200
		25	40	1.53	0.15	EETED2W151JJ	200
		30	30	1.53	0.15	EETED2W151KJ	200
		35	25	1.53	0.15	EETED2W151LJ	200
	180	22	50	1.60	0.15	EETED2W181HJ	200
		25	40	1.60	0.15	EETED2W181JJ	200
		30	30	1.60	0.15	EETED2W181KJ	200
		35	25	1.60	0.15	EETED2W181LJ	200
	220	25	45	2.03	0.15	EETED2W221JJ	200
		30	35	2.03	0.15	EETED2W221KJ	100
		35	30	2.03	0.15	EETED2W221LJ	200
	270	30	40	2.45	0.15	EETED2W271KJ	100
		35	35	2.45	0.15	EETED2W271LJ	100
	330	30	50	2.64	0.15	EETED2W331KJ	100
		35	40	2.64	0.15	EETED2W331LJ	100
	390	35	40	2.82	0.15	EETED2W391LJ	100
	470	35	50	3.53	0.15	EETED2W471LJ	100

Endurance : 105°C 3000h

Terminal Pitch : 10mm

When capacitors of $\phi 35 \times 45\text{L}$ and $\phi 35 \times 50\text{L}$ are mounted on PWB, reinforce them with mounting clamp or adhesives.(Avoid using adhesives including halogenated compositions.)