



Sketch with main dimensions

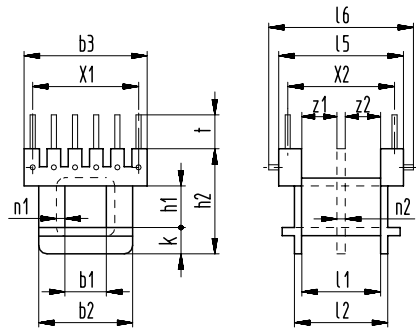


Standard: fully pinned, partial fitting on request.
t = standard pin length, alternative pin length in brackets.
The grid distances X1/X2 can be used for metric and for inch measures.
Bobbin Wz 2538 with primary margin on side of pin positions 7-12.



z1 ± 0,2	z2 ± 0,2	b1 ± 0,1	b2 ± 0,2	b3 ± 0,2	h1 ± 0,1	h2 ± 0,2	k ± 0,2	l1 ± 0,2	l2 ± 0,2	l5 ± 0,3	l6 ± 0,3	n1 +0,2	n2 ± 0,1	t ± 0,2	X1 ± 0,2	X2 ± 0,2	X3 ①	Type	Art. No.	
4,1	4,1	4,9	11,1	14,6	4,9	12,4	3	9,4	11,1	14,7	16,8	0,7	1	3 (5)	5x2,5	12,5	2x6	EE 16/4,9/1 ST EE 16/4,9/2 ST	Wz 7388/1 ST Wz 7388/2 ST	2886 2901
-	-	4,9	11,1	14,6	4,9	12,4	3	7,3 9,4	11,1	14,7	16,8	1,9 0,7 1		3,2	5x2,5	12,5	2x6	EE 16/4,9/1 ST-WU with primary margin	Wz 2538/1 ST-WU	7103

Sketch with main dimensions

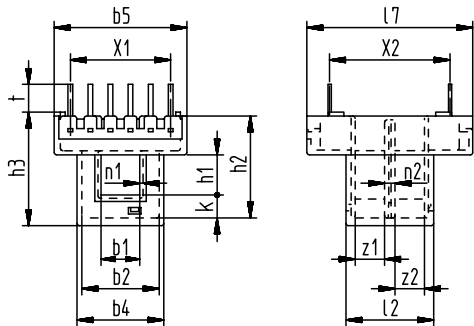


t = pin length from spacers

Bobbins with molded-in pins 0,4 x 0,6 mm.
For PCB mounting and SMD technique.
Only fully fitted available.
Standard material PA 6.6 - 30 H,
for SMD versions we recommend PPS material.

ST/II-H
with shortened open cover
(for applications
in accordance with VDE 0570/EN 61558)

SMD

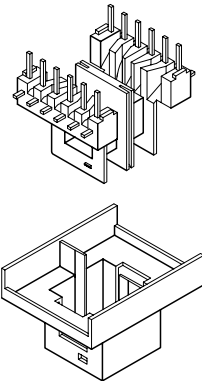

One set consists of: 1 bobbin
1 cover

z1 ± 0,2	z2 ± 0,2	b1 ± 0,2	b2 ± 0,2	b4 ± 0,2	b5 ± 0,3	h1 ± 0,2	h2 ± 0,2	h3 ± 0,3	k ± 0,2	l2 ± 0,2	l7 ± 0,3	n1 +0,2	n2 ± 0,1	t ± 0,4	X1 ± 0,3	X2 ± 0,3	X3 ①	Type	Art. No.	
3,7	3,7	4,9	9,8	11	16,8	4,9	12,8	14,5	2,9	11,1	21	0,5	1,3	3,5	5x2,54	15,24	2x6	EE 16/4,9/1 ST EE 16/4,9/2 ST	Wz 7741/1 ST Wz 7741/2 ST	3537 3503

① X3 = max. number of slots or terminals