

Features

- High intensity
- Wide viewing angle
- General purpose leads
- Reliable and rugged


Absolute Maximum Ratings at Ta=25

Parameter	Max.	Unit
Power Dissipation	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	40	mA
Derating Linear From 50	0.4	mA /
Reverse Voltage	5	V
Operating Temperature Range	-40 to +80	
Storage Temperature Range	-40 to +80	
Lead Soldering Temperature [4mm(.157") From Body]	260 for 5 Seconds	

Notes:

- All dimensions are in millimeters (inches).
- Protruded resin under flange is 1.0mm (.04") max.
- Lead spacing is measured where the leads emerge from the package.
- Specifications are subject to change without notice.

Package Dimensions

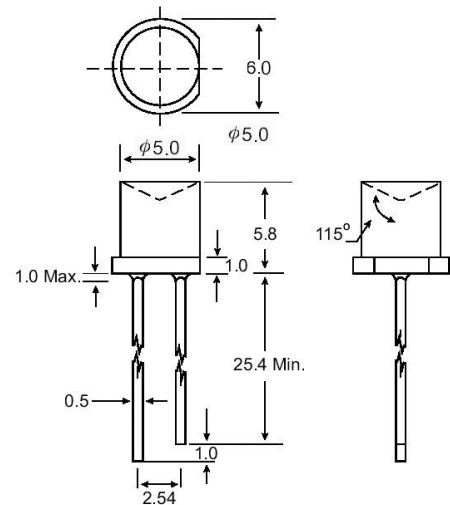

Unit: mm (inches)

Tolerance: $\pm 0.25\text{mm}$ (.010") max

Part No.	Emitting Color	Lens Color	Peak Wavelength λ_p (nm)	Vf (V) If = 20mA (Note E1)		Iv (mcd) (Note E2)		Viewing Angle $2\theta_{1/2}$ (Deg) (Note E3)
				Min	Typ	Min	Typ	
EL-5RX52	Ultra-Red	Water Clear	645	1.6	1.8	1100	2300	160
EL-5GX52	Ultra-Green	Water Clear	568	1.7	2.2	400	1100	160
EL-5YX52	Ultra-Yellow	Water Clear	590	1.7	2.0	800	1800	160
EL-5RX53	Ultra-Red	Red Transparent	645	1.6	1.8	1100	2300	160
EL-5GX53	Ultra-Green	Green Transparent	568	1.7	2.2	400	1000	160
EL-5YX53	Ultra-Yellow	Yellow Transparent	590	1.7	2.0	800	1800	160

Parameter

Luminous Intensity

Dominant Wavelength

Peak Emission Wavelength

Viewing Angle

Spectral Line Half-Width

Forward Voltage

Reverse Current

Test Condition

If = 20mA (Note E1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.)

If = 20mA (Note E2: The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.)

If = 20mA

(Note E3. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.)

If = 20mA

If = 20mA

If = 20mA