Data Sheet | February 11, 2005 | FN7030.1

Low-Power 100MHz Gain-of-2 Stable Operational Amplifier

The EL2045 is a high speed, low power, low cost monolithic operational amplifier built on Elantec's proprietary complementary bipolar process. The EL2045 is gain-of-2 stable and features a 275V/µs slew rate and 100MHz gain-bandwidth at gain-of-2 while requiring only 5.2mA of supply current.

The power supply operating range of the EL2045 is from ±18V down to as little as ±2V. For single-supply operation, the EL2045 operates from 36V down to as little as 2.5V. The excellent power supply operating range of the EL2045 makes it an obvious choice for applications on a single +5V or +3V supply.

The EL2045 also features an extremely wide output voltage swing of ±13.6V with V_S = ±15V and R_L = 1kΩ. At ±5V, output voltage swing is a wide ±3.8V with R_L = 500Ω and ±3.2V with R_L = 150Ω. Furthermore, for single-supply operation at +5V, output voltage swing is an excellent 0.3V to 3.8V with R_L = 500Ω.

At a gain of +2, the EL2045 has a -3dB bandwidth of 100MHz with a phase margin of 50°. Because of its conventional voltage-feedback topology, the EL2045 allows the use of reactive or non-linear elements in its feedback network. This versatility combined with low cost and 75mA of output-current drive makes the EL2045 an ideal choice for price-sensitive applications requiring low power and high speed.

Ordering Information

PART NUMBER	PACKAGE	TAPE & REEL	PKG. DWG. #
EL2045CS	8-Pin SO	-	MDP0027
EL2045CS-T7	8-Pin SO	7”	MDP0027
EL2045CS-T13	8-Pin SO	13”	MDP0027
EL2045CSZ (See Note)	8-Pin SO (Pb-free)	-	MDP0027
EL2045CSZ-T7 (See Note)	8-Pin SO (Pb-free)	7”	MDP0027
EL2045CSZ-T13 (See Note)	8-Pin SO (Pb-free)	13”	MDP0027
EL2045CN	8-Pin PDIP	-	MDP0031

NOTE: Intersil Pb-free products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

Features


- 100MHz gain-bandwidth at gain-of-2
- Gain-of-2 stable
- Low supply current - 5.2mA at V_S = ±15V
- Wide supply range - ±2V to ±18V dual-supply and 2.5V to 36V single-supply
- High slew rate - 275V/µs
- Fast-settling - 80ns to 0.1% for a 10V step
- Low differential gain - 0.02% at A_V = +2, R_L = 150Ω
- Low differential phase - 0.07° at A_V = +2, R_L = 150Ω
- Wide output voltage swing - ±13.6V with V_S = ±15V, R_L = 1kΩ and 3.8V/0.3V with V_S = +5V, R_L = 500Ω
- Pb-Free available (RoHS compliant)

Applications

- Video amplifiers
- Single-supply amplifiers
- Active filters/integrators
- High speed sample-and-hold
- High speed signal processing
- ADC/DAC buffers
- Pulse/RF amplifiers
- Pin diode receivers
- Log amplifiers
- Photo multiplier amplifiers
- Difference amplifiers

Pinout

EL2045
(8-PIN SO & 8-PIN PDIP)
TOP VIEW



CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
1-888-INTERSIL or 1-888-352-6832 | Intersil (and design) is a registered trademark of Intersil Americas Inc.
Copyright Intersil Americas Inc. 2002, 2005. All Rights Reserved
All other trademarks mentioned are the property of their respective owners.

Absolute Maximum Ratings (T_A = 25°C)

Supply Voltage (V_S) . . . . . ±18V or 36V
Input Voltage (V_{IN}) . . . . . $\pm V_S$
Differential Input Voltage (dV_{IN}) . . . . . ±10V
Continuous Output Current 60mA
Power Dissipation (P_D) . . . . . See Curves
Operating Temperature Range (T_A) . . . . . -40°C to +85°C
Operating Junction Temperature (T_J) . . . . . +150°C
Storage Temperature (T_{ST}) . . . . . -65°C to +150°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

IMPORTANT NOTE: All parameters having Min/Max specifications are guaranteed. Typical values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore: $T_J = T_C = T_A$

DC Electrical Specifications

V_S = ±15V, R_L = 1kΩ, unless otherwise specified.

PARAMETER	DESCRIPTION	CONDITION	TEMP	MIN	TYP	MAX	UNIT
V_{OS}	Input Offset Voltage	V_S = ±15V	25°C		0.5	7.0	mV
			T_{MIN}, T_{MAX}			9.0	mV
TCV_{OS}	Average Offset Voltage Drift		All		10.0		µV/°C
I_B	Input Bias Current	V_S = ±15V	25°C		2.8	8.2	µA
			T_{MIN}, T_{MAX}			9.2	µA
		V_S = ±5V	25°C		2.8		µA
I_{OS}	Input Offset Current	V_S = ±15V	25°C		50	300	nA
			T_{MIN}, T_{MAX}			400	nA
		V_S = ±5V	25°C		50		nA
TCI_{OS}	Average Offset Current Drift	(Note 1)	All		0.3		nA/°C
A_{VOL}	Open-loop Gain	V_S = ±15V,V_{OUT} = ±10V, R_L = 1kΩ	25°C	1500	3000		V/V
			T_{MIN}, T_{MAX}	1500			V/V
		V_S = ±5V, V_{OUT} = ±2.5V, R_L = 500Ω	25°C		2500		V/V
		V_S = ±5V, V_{OUT} = ±2.5V, R_L = 150Ω	25°C		1750		V/V
PSRR	Power Supply Rejection Ratio	V_S = ±5V to ±15V	25°C	65	85		dB
			T_{MIN}, T_{MAX}	60			dB
CMRR	Common-mode Rejection Ratio	V_{CM} = ±12V, V_{OUT} = 0V	25°C	70	95		dB
			T_{MIN}, T_{MAX}	70			dB
CMIR	Common-mode Input Range	V_S = ±15V	25°C		±14.0		V
		V_S = ±5V	25°C		±4.2		V
		V_S = +5V	25°C		4.2/0.1		V
V_{OUT}	Output Voltage Swing	V_S = ±15V, R_L = 1kΩ	25°C	±13.4	±13.6		V
			T_{MIN}, T_{MAX}	±13.1			V
		V_S = ±15V, R_L = 500Ω	25°C	±12.0	±13.4		V
		V_S = ±5V, R_L = 500Ω	25°C	±3.4	±3.8		V
		V_S = ±5V, R_L = 150Ω	25°C		±3.2		V
		V_S = +5V, R_L = 500Ω	25°C	3.6/0.4	3.8/0.3		V
			T_{MIN}, T_{MAX}	3.5/0.5			V
I_{SC}	Output Short Circuit Current		25°C	40	75		mA
			T_{MIN}, T_{MAX}	35			mA

DC Electrical Specifications V_S = ±15V, R_L = 1kΩ, unless otherwise specified. **(Continued)**

PARAMETER	DESCRIPTION	CONDITION	TEMP	MIN	TYP	MAX	UNIT
I_S	Supply Current	V_S = ±15V, no load	25°C		5.2	7	mA
			T_{MIN}, T_{MAX}			7.6	mA
		V_S = ±5V, no load	25°C		5.0		mA
R_{IN}	Input Resistance	Differential	25°C		150		kΩ
		Common-mode	25°C		15		MΩ
C_{IN}	Input Capacitance	A_V = +2 @10MHz	25°C		1.0		pF
R_{OUT}	Output Resistance	A_V = +2	25°C		50		mΩ
PSOR	Power-Supply Operating Range	Dual-supply	25°C	±2.0		±18.0	V
		Single-supply	25°C	2.5		36.0	V

NOTE:

1. Measured from T_{MIN} To T_{MAX}.


Closed-Loop AC Electrical Specifications V_S = ±15V, A_V = +2, R_F = R_G = 1kΩ, C_F = 3pF, R_L = 1kΩ unless otherwise specified.

PARAMETER	DESCRIPTION	CONDITION	TEMP	MIN	TYP	MAX	UNIT
BW	-3dB Bandwidth (V_{OUT} = 0.4V_{PP})	V_S = ±15V, A_V = +2	25°C		100		MHz
		V_S = ±15V, A_V = -1	25°C		75		MHz
		V_S = ±15V, A_V = +5	25°C		20		MHz
		V_S = ±15V, A_V = +10	25°C		10		MHz
		V_S = ±15V, A_V = +20	25°C		5		MHz
		V_S = ±5V, A_V = +2	25°C		75		MHz
GBWP	Gain-bandwidth Product	V_S = ±15V	25°C		200		MHz
		V_S = ±5V	25°C		150		MHz
PM	Phase Margin	R_L = 1kΩ, C_L = 10pF	25°C		50		°
SR	Slew Rate (Note 1)	V_S = ±15V, R_L = 1kΩ	25°C	200	275		V/µs
		V_S = ±5V, R_L = 500Ω	25°C		200		V/µs
FPBW	Full-power Bandwidth (Note 2)	V_S = ±15V	25°C	3.2	4.4		MHz
		V_S = ±5V	25°C		12.7		MHz
t_R, t_F	Rise Time, Fall Time	0.1V output step	25°C		3.0		ns
OS	Overshoot	0.1V output step	25°C		20		%
t_{PD}	Propagation Delay		25°C		2.5		ns
t_S	Settling to +0.1% (A_V = +2)	V_S = ±15V, 10V step	25°C		80		ns
		V_S = ±5V, 5V step	25°C		60		ns
dG	Differential Gain (Note 3)	NTSC/PAL	25°C		0.02		%
dP	Differential Phase (Note 3)	NTSC/PAL	25°C		0.07		°
eN	Input Noise Voltage	10kHz	25°C		15.0		nV/√Hz
iN	Input Noise Current	10kHz	25°C		1.50		pA/√Hz
CI STAB	Load Capacitance Stability	A_V = +2	25°C		Infinite		pF

NOTES:


1. Slew rate is measured on rising edge.
2. For V_S = ±15V, V_{OUT} = 20V_{PP}. For V_S = ±5V, V_{OUT} = 5 V_{PP}. Full-power bandwidth is based on slew rate measurement using: FPBW = SR / (2π * Vpeak).
3. Video performance measured at V_S = ±15V, A_V = +2 with 2 times normal video level across R_L = 150Ω. This corresponds to standard video levels across a back-terminated 75Ω load. For other values of R_L, see curves.

EL2045 Test Circuit

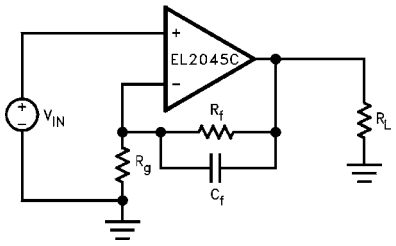


Typical Performance Curves


Non-Inverting Frequency Response




Inverting Frequency Response




Frequency Response for Various Load Resistances




Open-Loop Gain and Phase vs Frequency




Output Voltage Swing vs Frequency




Equivalent Input Noise




CMRR, PSRR and Closed-Loop Output Resistance vs Frequency




2nd and 3rd Harmonic Distortion vs Frequency




Settling Time vs Output Voltage Change




Supply Current vs Supply Voltage



Common-Mode Input Range vs Supply Voltage




Output Voltage Range vs Supply Voltage




Typical Performance Curves (Continued)


Gain-Bandwidth Product vs Supply Voltage




Open-Loop Gain vs Supply Voltage




Slew-Rate vs Supply Voltage




Bias and Offset Current vs Input Common-Mode Voltage




Open-Loop Gain vs Load Resistance




Voltage Swing vs Load Resistance




Offset Voltage vs Temperature




Bias and Offset Current vs Temperature




Supply Current vs Temperature




Gain-Bandwidth Product vs Temperature



Open-Loop Gain PSRR and CMRR vs Temperature




Slew Rate vs Temperature




Typical Performance Curves (Continued)


Short-Circuit Current vs Temperature




Gain-Bandwidth Product vs Load Capacitance




Overshoot vs Load Capacitance




Small-Signal Step Response




Large-Signal Step Response




Differential Gain and Phase vs DC Input Offset at 3.58MHz




Differential Gain and Phase vs DC Input Offset at 4.43MHz



Differential Gain and Phase vs Number of 150Ω Loads at 3.58MHz




Differential Gain and Phase vs Number of 150Ω Loads at 4.43MHz




Package Power Dissipation vs Ambient Temperature


JEDEC JESD51-3 Low Effective Thermal Conductivity Test Board

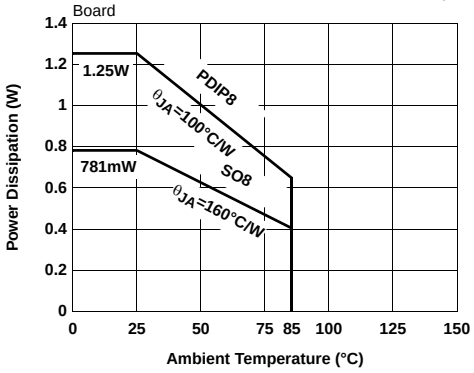

Simplified Schematic

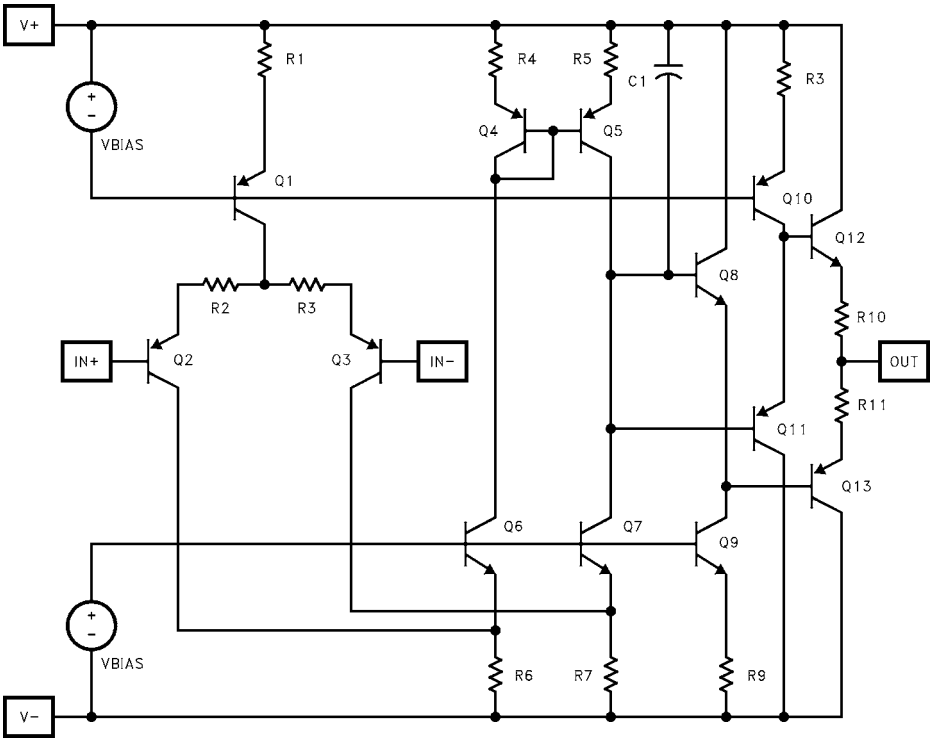

Burn-In Circuit



ALL PACKAGES USE THE SAME SCHEMATIC

Applications Information

Product Description

The EL2045 is a low-power wideband, gain-of-2 stable monolithic operational amplifier built on Elantec's proprietary high-speed complementary bipolar process. The EL2045 uses a classical voltage-feedback topology which allows it to be used in a variety of applications where current-feedback amplifiers are not appropriate because of restrictions placed upon the feedback element used with the amplifier. The conventional topology of the EL2045 allows, for example, a capacitor to be placed in the feedback path, making it an excellent choice for applications such as active filters, sample-and-holds, or integrators. Similarly, because of the ability to use diodes in the feedback network, the EL2045 is an excellent choice for applications such as fast log amplifiers.

Single-Supply Operation

The EL2045 has been designed to have a wide input and output voltage range. This design also makes the EL2045 an excellent choice for single-supply operation. Using a single positive supply, the lower input voltage range is within 100mV of ground (R_L = 500Ω), and the lower output voltage range is within 300mV of ground. Upper input voltage range reaches 4.2V, and output voltage range reaches 3.8V with a 5V supply and R_L = 500Ω. This results in a 3.5V output swing on a single 5V supply. This wide output voltage range also allows single-supply operation with a supply voltage as high as 36V or as low as 2.5V. On a single 2.5V supply, the EL2045 still has 1V of output swing.

Gain-Bandwidth Product and the -3dB Bandwidth

The EL2045 has a gain-bandwidth product of 100MHz while using only 5.2mA of supply current. For gains greater than 4, its closed-loop -3dB bandwidth is approximately equal to the gain-bandwidth product divided by the noise gain of the circuit. For gains less than 4, higher-order poles in the amplifier's transfer function contribute to even higher closed loop bandwidths. For example, the EL2045 has a -3dB bandwidth of 100MHz at a gain of +2, dropping to 20MHz at a gain of +5. It is important to note that the EL2045 has been

designed so that this “extra” bandwidth in low-gain applications does not come at the expense of stability. As seen in the typical performance curves, the EL2045 in a gain of +2 only exhibits 1.0dB of peaking with a 1kΩ load.

Video Performance

An industry-standard method of measuring the video distortion of a component such as the EL2045 is to measure the amount of differential gain (dG) and differential phase (dP) that it introduces. To make these measurements, a $0.286V_{PP}$ (40 IRE) signal is applied to the device with 0V DC offset (0 IRE) at either 3.58MHz for NTSC or 4.43MHz for PAL. A second measurement is then made at 0.714V DC offset (100 IRE). Differential gain is a measure of the change in amplitude of the sine wave, and is measured in percent. Differential phase is a measure of the change in phase, and is measured in degrees.

For signal transmission and distribution, a back-terminated cable (75Ω in series at the drive end, and 75Ω to ground at the receiving end) is preferred since the impedance match at both ends will absorb any reflections. However, when double termination is used, the received signal is halved; therefore a gain of 2 configuration is typically used to compensate for the attenuation.

The EL2045 has been designed as an economical solution for applications requiring low video distortion. It has been thoroughly characterized for video performance in the topology described above, and the results have been included as typical dG and dP specifications and as typical performance curves. In a gain of +2, driving 150Ω, with standard video test levels at the input, the EL2045 exhibits dG and dP of only 0.02% and 0.07° at NTSC and PAL. Because dG and dP can vary with different DC offsets, the video performance of the EL2045 has been characterized over the entire DC offset range from -0.714V to +0.714V. For more information, refer to the curves of dG and dP vs DC Input Offset.

The output drive capability of the EL2045 allows it to drive up to 2 back-terminated loads with good video performance. For more demanding applications such as greater output drive or better video distortion, a number of alternatives such as the EL2120, EL400, or EL2074 should be considered.

Output Drive Capability

The EL2045 has been designed to drive low impedance loads. It can easily drive $6V_{PP}$ into a 150Ω load. This high output drive capability makes the EL2045 an ideal choice for RF, IF and video applications. Furthermore, the current drive of the EL2045 remains a minimum of 35mA at low temperatures.

Printed-Circuit Layout

The EL2045 is well behaved, and easy to apply in most applications. However, a few simple techniques will help assure rapid, high quality results. As with any high-frequency device, good PCB layout is necessary for optimum performance. Ground-plane construction is highly recommended, as is good power supply bypassing. A 0.1µF ceramic capacitor is recommended for bypassing both supplies. Pin lengths should be as short as possible, and bypass capacitors should be as close to the device pins as possible. For good AC performance, parasitic capacitances should be kept to a minimum at both inputs and at the output. Resistor values should be kept under 5kΩ because of the RC time constants associated with the parasitic capacitance. Metal-film and carbon resistors are both acceptable, use of wire-wound resistors is not recommended because of their parasitic inductance. Similarly, capacitors should be low-inductance for best performance.

The EL2045 Macromodel

This macromodel has been developed to assist the user in simulating the EL2045 with surrounding circuitry. It has been developed for the PSPICE simulator (copywritten by the Microsim Corporation), and may need to be rearranged for other simulators. It approximates DC, AC, and transient response for resistive loads, but does not accurately model capacitive loading. This model is slightly more complicated than the models used for low-frequency op-amps, but it is much more accurate for AC analysis.


The model does not simulate these characteristics accurately:

- Noise
- Settling time
- Non-linearities
- Temperature effects
- Manufacturing variations
- CMRR
- PSRR

EL2045 Macromodel

```
* Connections:   +input
*                |    | -input
*                |    |    +Vsupply
*                |    |    |     -Vsupply
*                |    |    |     |    output
*                |    |    |     |    |
.subckt M2045    3    2    7     4    6
*
* Input stage
*
ie 7 37 0.9mA
r6 36 37 400
r7 38 37 400
rc1 4 30 850
rc2 4 39 850
q1 30 3 36 qp
q2 39 2 38 qpa
ediff 33 0 39 30 1.0
rdiff 33 0 1Meg
*
* Compensation Section
*
ga 0 34 33 0 1m
rh 34 0 2Meg
ch 34 0 1.5pF
rc 34 40 1K
cc 40 0 1pF
*
* Poles
*
ep 41 0 40 0 1
rpa 41 42 200
cpa 42 0 2pF
rpb 42 43 200
cpb 43 0 2pF
*
* Output Stage
*
ios1 7 50 1.0mA
ios2 51 4 1.0mA
q3 4 43 50 qp
q4 7 43 51 qn
q5 7 50 52 qn
q6 4 51 53 qp
ros1 52 6 25
ros2 6 53 25
*
* Power Supply Current
*
ips 7 4 2.7mA
*
* Models
*
.model qn npn(is=800E-18 bf=200 tf=0.2nS)
.model qpa pnp(is=864E-18 bf=100 tf=0.2nS)
.model qp pnp(is=800E-18 bf=125 tf=0.2nS)
.ends
```

EL2045 Macromodel (Continued)

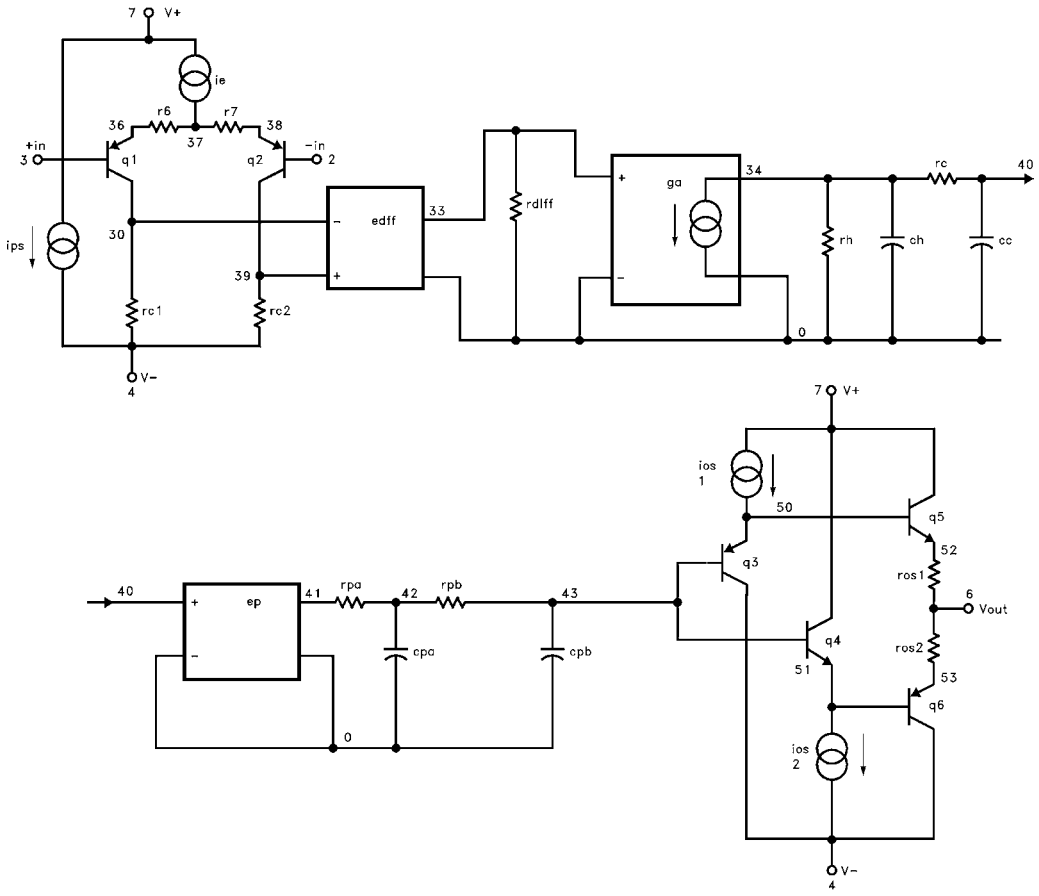

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.
Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com