

## 60MHz Rail-to-Rail Input-Output Op Amp

The EL5211A is a low power, high voltage, rail-to-rail input-output amplifier containing two amplifiers. Operating on supplies ranging from 5V to 15V, while consuming only 2.5mA per amplifier, the EL5211A has a bandwidth of 60MHz (-3dB) and provides common-mode input ability beyond the supply rails, as well as rail-to-rail output capability. This enables the EL5211A to offer maximum dynamic range at any supply voltage.

The EL5211A also features fast slewing and settling times, as well as a high output drive capability of 65mA (sink and source). These features make the EL5211A ideal for high speed filtering and signal conditioning application. Other applications include battery-powered, portable devices and anywhere low power consumption is important.

The EL5211A is available in the 8 Ld HMSOP package, features a standard operational amplifier pinout, and is specified for operation over a temperature range of -40°C to +85°C.

## Ordering Information

| PART NUMBER<br>(Note) | PART<br>MARKING | TAPE &<br>REEL | PACKAGE<br>(Pb-free)  | PKG.<br>DWG. # |
|-----------------------|-----------------|----------------|-----------------------|----------------|
| EL5211AIYEZ           | BBLAA           | -              | 8 Ld HMSOP<br>(3.0mm) | MDP0050        |
| EL5211AIYEZ-T7        | BBLAA           | 7"             | 8 Ld HMSOP<br>(3.0mm) | MDP0050        |
| EL5211AIYEZ-T13       | BBLAA           | 13"            | 8 Ld HMSOP<br>(3.0mm) | MDP0050        |

NOTE: Intersil Pb-free plus anneal products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

## Features


- 60MHz (-3dB) bandwidth
- Supply voltage = 4.5V to 16.5V
- Low supply current (per amplifier) = 2.5mA
- High slew rate = 75V/μs
- Unity-gain stable
- Beyond the rails input capability
- Rail-to-rail output swing
- ±110mA output short current
- Pb-free plus anneal available (RoHS compliant)

## Applications

- TFT-LCD panels
- V<sub>COM</sub> amplifiers
- Drivers for A/D converters
- Data acquisition
- Video processing
- Audio processing
- Active filters
- Test equipment
- Battery-powered applications
- Portable equipment

## Pinout

**EL5211A**  
**(8 LD HMSOP)**  
**TOP VIEW**



**Absolute Maximum Ratings** ( $T_A = +25^\circ\text{C}$ )

Supply Voltage between  $V_{S+}$  and  $V_{S-}$  ..... +18V  
 Input Voltage .....  $V_{S-} - 0.5\text{V}$ ,  $V_{S+} + 0.5\text{V}$   
 Maximum Continuous Output Current ..... 65mA  
 Maximum Die Temperature ..... +125°C

**Thermal Information**

Storage Temperature ..... -65°C to +150°C  
 Ambient Operating Temperature ..... -40°C to +85°C  
 Power Dissipation ..... See Curves  
 Pb-free reflow profile ..... see link below  
<http://www.intersil.com/pbfree/Pb-FreeReflow.asp>

**CAUTION:** Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

**IMPORTANT NOTE:** All parameters having Min/Max specifications are guaranteed. Typ values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore:  $T_J = T_C = T_A$

**Electrical Specifications**  $V_{S+} = +5\text{V}$ ,  $V_{S-} = -5\text{V}$ ,  $R_L = 1\text{k}\Omega$  to 0V,  $T_A = +25^\circ\text{C}$ , Unless Otherwise Specified.

| PARAMETER                       | DESCRIPTION                           | CONDITIONS                                                   | MIN  | TYP       | MAX  | UNIT                         |
|---------------------------------|---------------------------------------|--------------------------------------------------------------|------|-----------|------|------------------------------|
| <b>INPUT CHARACTERISTICS</b>    |                                       |                                                              |      |           |      |                              |
| $V_{OS}$                        | Input Offset Voltage                  | $V_{CM} = 0\text{V}$                                         |      | 3         | 15   | mV                           |
| $TCV_{OS}$                      | Average Offset Voltage Drift (Note 1) |                                                              |      | 7         |      | $\mu\text{V}/^\circ\text{C}$ |
| $I_B$                           | Input Bias Current                    | $V_{CM} = 0\text{V}$                                         |      | 2         | 60   | nA                           |
| $R_{IN}$                        | Input Impedance                       |                                                              |      | 1         |      | $\text{G}\Omega$             |
| $C_{IN}$                        | Input Capacitance                     |                                                              |      | 2         |      | pF                           |
| $CMIR$                          | Common-Mode Input Range               |                                                              | -5.5 |           | +5.5 | V                            |
| $CMRR$                          | Common-Mode Rejection Ratio           | for $V_{IN}$ from -5.5V to 5.5V                              | 50   | 70        |      | dB                           |
| $A_{VOL}$                       | Open-Loop Gain                        | $-4.5\text{V} \leq V_{OUT} \leq 4.5\text{V}$                 | 60   | 70        |      | dB                           |
| <b>OUTPUT CHARACTERISTICS</b>   |                                       |                                                              |      |           |      |                              |
| $V_{OL}$                        | Output Swing Low                      | $I_L = -5\text{mA}$                                          |      | -4.9      | -4.8 | V                            |
| $V_{OH}$                        | Output Swing High                     | $I_L = 5\text{mA}$                                           | 4.8  | 4.9       |      | V                            |
| $I_{SC}$                        | Short-Circuit Current                 |                                                              |      | $\pm 125$ |      | mA                           |
| $I_{OUT}$                       | Output Current                        |                                                              |      | $\pm 65$  |      | mA                           |
| <b>POWER SUPPLY PERFORMANCE</b> |                                       |                                                              |      |           |      |                              |
| $PSRR$                          | Power Supply Rejection Ratio          | $V_S$ is moved from $\pm 2.25\text{V}$ to $\pm 7.75\text{V}$ | 60   | 80        |      | dB                           |
| $I_S$                           | Supply Current                        | No load                                                      |      | 5         | 7.5  | mA                           |
| <b>DYNAMIC PERFORMANCE</b>      |                                       |                                                              |      |           |      |                              |
| $SR$                            | Slew Rate (Note 2)                    | $-4.0\text{V} \leq V_{OUT} \leq 4.0\text{V}$ , 20% to 80%    |      | 75        |      | $\text{V}/\mu\text{s}$       |
| $t_S$                           | Settling to +0.1% ( $A_V = +1$ )      | ( $A_V = +1$ ), $V_O = 2\text{V}$ step                       |      | 80        |      | ns                           |
| $BW$                            | -3dB Bandwidth                        |                                                              |      | 60        |      | MHz                          |
| $GBWP$                          | Gain-Bandwidth Product                |                                                              |      | 32        |      | MHz                          |
| $PM$                            | Phase Margin                          |                                                              |      | 50        |      | °                            |
| $CS$                            | Channel Separation                    | $f = 5\text{MHz}$                                            |      | 110       |      | dB                           |
| $d_G$                           | Differential Gain (Note 3)            | $R_F = R_G = 1\text{k}\Omega$ and $V_{OUT} = 1.4\text{V}$    |      | 0.17      |      | %                            |
| $d_P$                           | Differential Phase (Note 3)           | $R_F = R_G = 1\text{k}\Omega$ and $V_{OUT} = 1.4\text{V}$    |      | 0.24      |      | °                            |

**NOTES:**

1. Measured over operating temperature range.
2. Slew rate is measured on rising and falling edges.
3. NTSC signal generator used.

**Electrical Specifications**  $V_{S+} = +5V$ ,  $V_{S-} = 0V$ ,  $R_L = 1k\Omega$  to  $2.5V$ ,  $T_A = +25^\circ C$ , Unless Otherwise Specified.

| PARAMETER                       | DESCRIPTION                           | CONDITION                                   | MIN  | TYP       | MAX  | UNIT             |
|---------------------------------|---------------------------------------|---------------------------------------------|------|-----------|------|------------------|
| <b>INPUT CHARACTERISTICS</b>    |                                       |                                             |      |           |      |                  |
| $V_{OS}$                        | Input Offset Voltage                  | $V_{CM} = 2.5V$                             |      | 3         | 15   | mV               |
| $TCV_{OS}$                      | Average Offset Voltage Drift (Note 4) |                                             |      | 7         |      | $\mu V/^\circ C$ |
| $I_B$                           | Input Bias Current                    | $V_{CM} = 2.5V$                             |      | 2         | 60   | nA               |
| $R_{IN}$                        | Input Impedance                       |                                             |      | 1         |      | $G\Omega$        |
| $C_{IN}$                        | Input Capacitance                     |                                             |      | 2         |      | pF               |
| CMIR                            | Common-Mode Input Range               |                                             | -0.5 |           | +5.5 | V                |
| CMRR                            | Common-Mode Rejection Ratio           | for $V_{IN}$ from -0.5V to 5.5V             | 45   | 66        |      | dB               |
| $A_{VOL}$                       | Open-Loop Gain                        | $0.5V \leq V_{OUT} \leq 4.5V$               | 60   | 70        |      | dB               |
| <b>OUTPUT CHARACTERISTICS</b>   |                                       |                                             |      |           |      |                  |
| $V_{OL}$                        | Output Swing Low                      | $I_L = -5mA$                                |      | 100       | 200  | mV               |
| $V_{OH}$                        | Output Swing High                     | $I_L = 5mA$                                 | 4.8  | 4.9       |      | V                |
| $I_{SC}$                        | Short-Circuit Current                 |                                             |      | $\pm 125$ |      | mA               |
| $I_{OUT}$                       | Output Current                        |                                             |      | $\pm 65$  |      | mA               |
| <b>POWER SUPPLY PERFORMANCE</b> |                                       |                                             |      |           |      |                  |
| PSRR                            | Power Supply Rejection Ratio          | $V_S$ is moved from 4.5V to 15.5V           | 60   | 80        |      | dB               |
| $I_S$                           | Supply Current                        | No load                                     |      | 5         | 7.5  | mA               |
| <b>DYNAMIC PERFORMANCE</b>      |                                       |                                             |      |           |      |                  |
| SR                              | Slew Rate (Note 5)                    | $1V \leq V_{OUT} \leq 4V$ , 20% to 80%      |      | 75        |      | V/ $\mu s$       |
| $t_S$                           | Settling to +0.1% ( $A_V = +1$ )      | ( $A_V = +1$ ), $V_O = 2V$ step             |      | 80        |      | ns               |
| BW                              | -3dB Bandwidth                        |                                             |      | 60        |      | MHz              |
| GBWP                            | Gain-Bandwidth Product                |                                             |      | 32        |      | MHz              |
| PM                              | Phase Margin                          |                                             |      | 50        |      | °                |
| CS                              | Channel Separation                    | $f = 5MHz$                                  |      | 110       |      | dB               |
| $d_G$                           | Differential Gain (Note 6)            | $R_F = R_G = 1k\Omega$ and $V_{OUT} = 1.4V$ |      | 0.17      |      | %                |
| $d_P$                           | Differential Phase (Note 6)           | $R_F = R_G = 1k\Omega$ and $V_{OUT} = 1.4V$ |      | 0.24      |      | °                |

**NOTES:**

4. Measured over operating temperature range.
5. Slew rate is measured on rising and falling edges.
6. NTSC signal generator used.

**Electrical Specifications**  $V_{S+} = +15V$ ,  $V_{S-} = 0V$ ,  $R_L = 1k\Omega$  to  $7.5V$ ,  $T_A = +25^\circ C$ , Unless Otherwise Specified.



| PARAMETER                    | DESCRIPTION                           | CONDITION       | MIN  | TYP | MAX   | UNIT             |
|------------------------------|---------------------------------------|-----------------|------|-----|-------|------------------|
| <b>INPUT CHARACTERISTICS</b> |                                       |                 |      |     |       |                  |
| $V_{OS}$                     | Input Offset Voltage                  | $V_{CM} = 7.5V$ |      | 3   | 15    | mV               |
| $TCV_{OS}$                   | Average Offset Voltage Drift (Note 7) |                 |      | 7   |       | $\mu V/^\circ C$ |
| $I_B$                        | Input Bias Current                    | $V_{CM} = 7.5V$ |      | 2   | 60    | nA               |
| $R_{IN}$                     | Input Impedance                       |                 |      | 1   |       | $G\Omega$        |
| $C_{IN}$                     | Input Capacitance                     |                 |      | 2   |       | pF               |
| CMIR                         | Common-Mode Input Range               |                 | -0.5 |     | +15.5 | V                |

**Electrical Specifications**  $V_S = +15V$ ,  $V_S^- = 0V$ ,  $R_L = 1k\Omega$  to  $7.5V$ ,  $T_A = +25^\circ C$ , Unless Otherwise Specified. (Continued)

| PARAMETER                       | DESCRIPTION                            | CONDITION                                   | MIN  | TYP       | MAX | UNIT       |
|---------------------------------|----------------------------------------|---------------------------------------------|------|-----------|-----|------------|
| CMRR                            | Common-Mode Rejection Ratio            | for $V_{IN}$ from $-0.5V$ to $15.5V$        | 53   | 72        |     | dB         |
| $A_{VOL}$                       | Open-Loop Gain                         | $0.5V \leq V_{OUT} \leq 14.5V$              | 60   | 70        |     | dB         |
| <b>OUTPUT CHARACTERISTICS</b>   |                                        |                                             |      |           |     |            |
| $V_{OL}$                        | Output Swing Low                       | $I_L = -5mA$                                |      | 100       | 200 | mV         |
| $V_{OH}$                        | Output Swing High                      | $I_L = 5mA$                                 | 14.8 | 14.9      |     | V          |
| $I_{SC}$                        | Short-Circuit Current                  |                                             |      | $\pm 125$ |     | mA         |
| $I_{OUT}$                       | Output Current                         |                                             |      | $\pm 65$  |     | mA         |
| <b>POWER SUPPLY PERFORMANCE</b> |                                        |                                             |      |           |     |            |
| PSRR                            | Power Supply Rejection Ratio           | $V_S$ is moved from $4.5V$ to $15.5V$       | 60   | 80        |     | dB         |
| $I_S$                           | Supply Current                         | No load                                     |      | 5         | 7.5 | mA         |
| <b>DYNAMIC PERFORMANCE</b>      |                                        |                                             |      |           |     |            |
| SR                              | Slew Rate (Note 8)                     | $1V \leq V_{OUT} \leq 14V$ , 20% to 80%     |      | 75        |     | V/ $\mu s$ |
| $t_S$                           | Settling to $\pm 0.1\%$ ( $A_V = +1$ ) | ( $A_V = +1$ ), $V_O = 2V$ step             |      | 80        |     | ns         |
| BW                              | -3dB Bandwidth                         |                                             |      | 60        |     | MHz        |
| GBWP                            | Gain-Bandwidth Product                 |                                             |      | 32        |     | MHz        |
| PM                              | Phase Margin                           |                                             |      | 50        |     | $^\circ$   |
| CS                              | Channel Separation                     | $f = 5MHz$                                  |      | 110       |     | dB         |
| $d_G$                           | Differential Gain (Note 9)             | $R_F = R_G = 1k\Omega$ and $V_{OUT} = 1.4V$ |      | 0.16      |     | %          |
| $d_P$                           | Differential Phase (Note 9)            | $R_F = R_G = 1k\Omega$ and $V_{OUT} = 1.4V$ |      | 0.22      |     | $^\circ$   |

**NOTES:**

7. Measured over operating temperature range.
8. Slew rate is measured on rising and falling edges.
9. NTSC signal generator used.

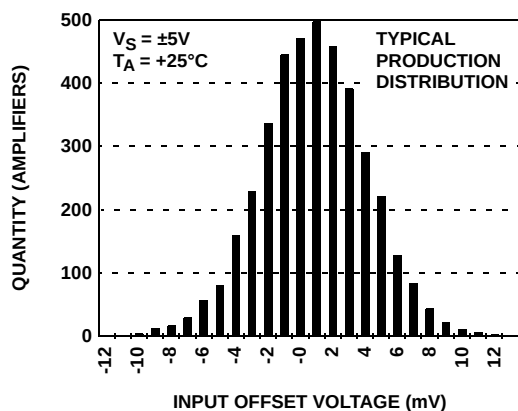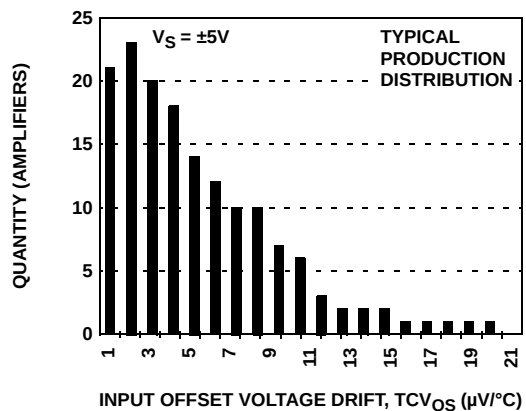**Typical Performance Curves****FIGURE 1. INPUT OFFSET VOLTAGE DISTRIBUTION****FIGURE 2. INPUT OFFSET VOLTAGE DRIFT**

**Typical Performance Curves** (Continued)

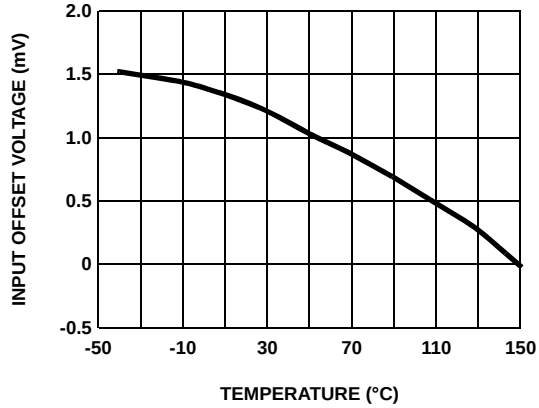


FIGURE 3. INPUT OFFSET VOLTAGE vs TEMPERATURE

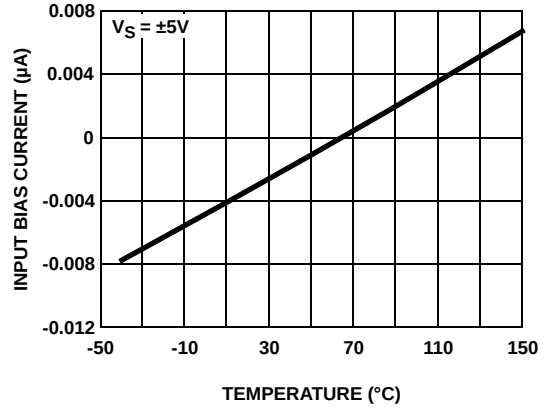


FIGURE 4. INPUT BIAS CURRENT vs TEMPERATURE

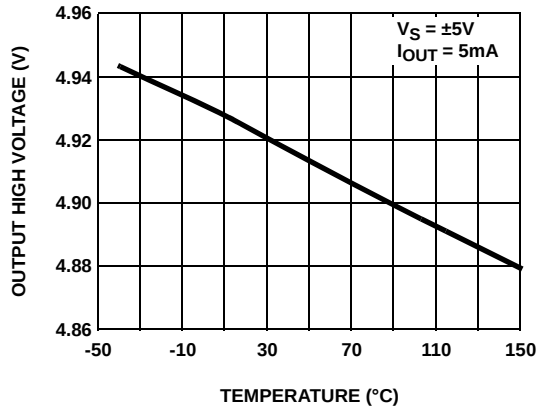


FIGURE 5. OUTPUT HIGH VOLTAGE vs TEMPERATURE

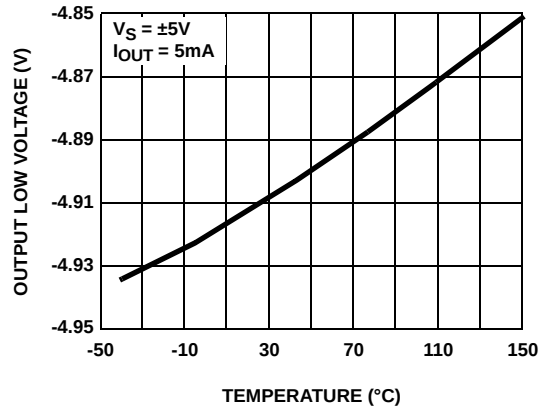


FIGURE 6. OUTPUT LOW VOLTAGE vs TEMPERATURE

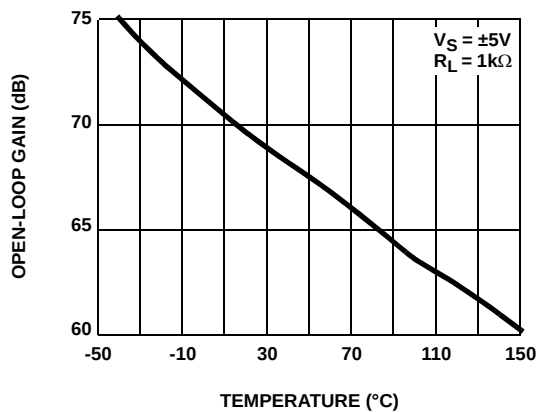


FIGURE 7. OPEN-LOOP GAIN vs TEMPERATURE

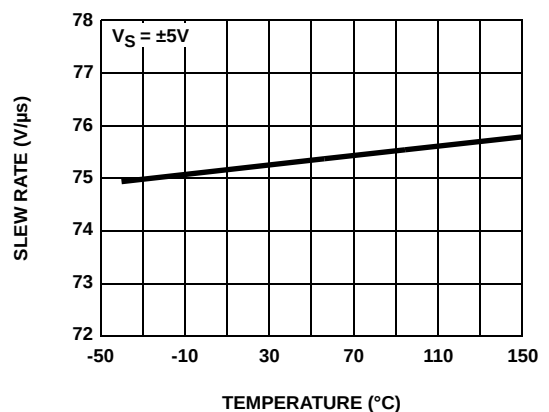


FIGURE 8. SLEW RATE vs TEMPERATURE

**Typical Performance Curves** (Continued)

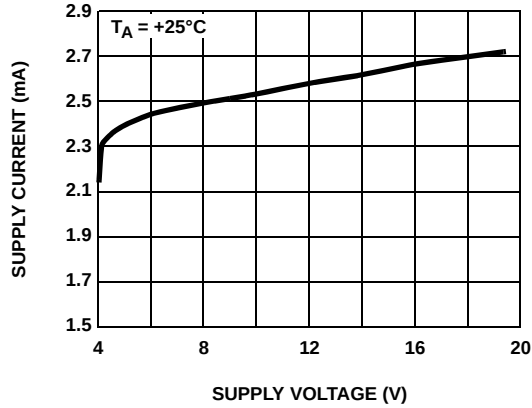


FIGURE 9. SUPPLY CURRENT PER AMPLIFIER vs SUPPLY VOLTAGE

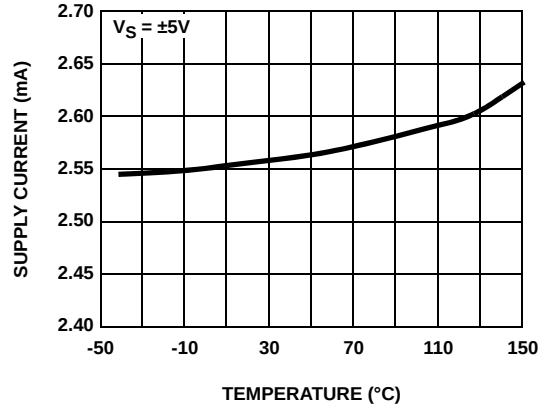


FIGURE 10. SUPPLY CURRENT PER AMPLIFIER vs TEMPERATURE

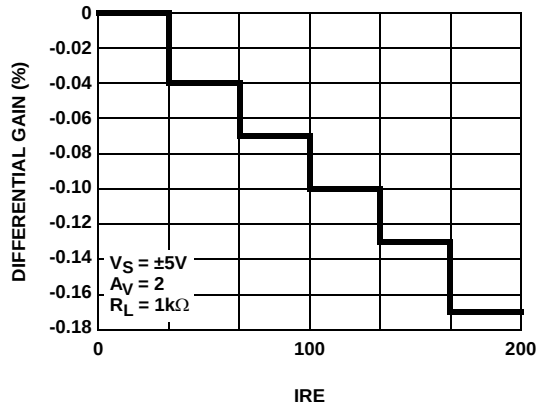


FIGURE 11. DIFFERENTIAL GAIN

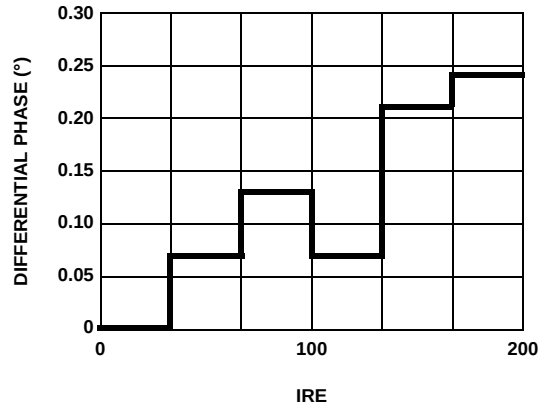


FIGURE 12. DIFFERENTIAL PHASE

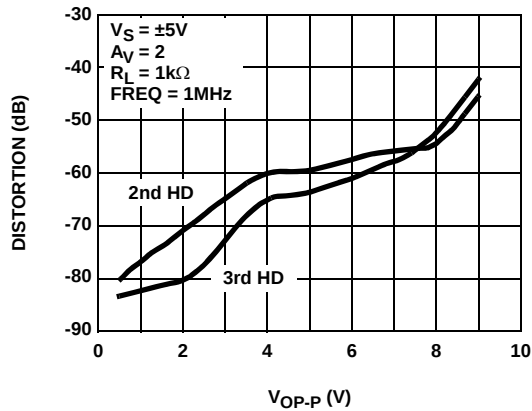


FIGURE 13. HARMONIC DISTORTION vs  $V_{OP-P}$

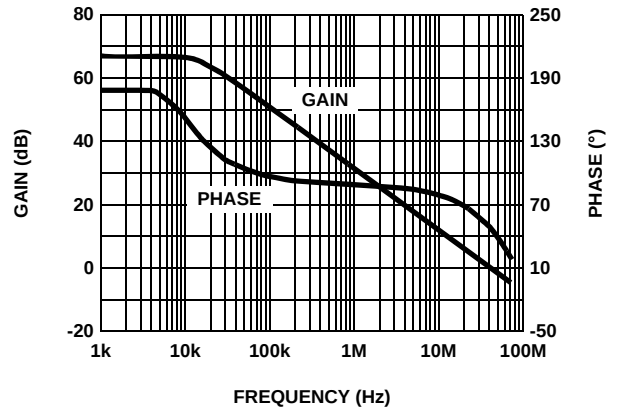


FIGURE 14. OPEN LOOP GAIN AND PHASE

# Typical Performance Curves (Continued)

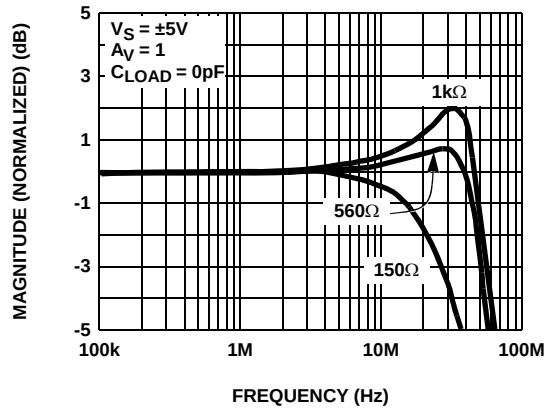
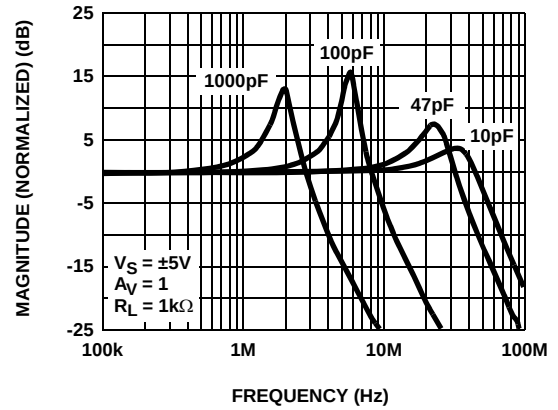
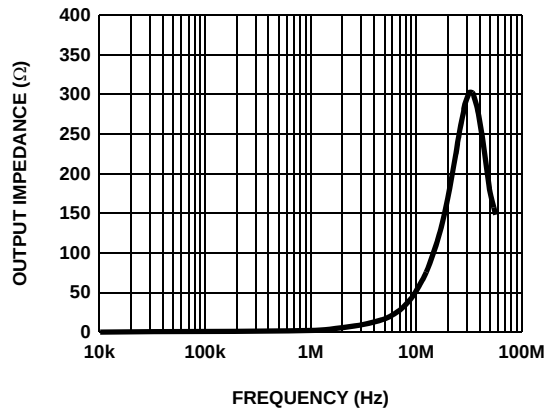
FIGURE 15. FREQUENCY RESPONSE FOR VARIOUS  $R_L$ FIGURE 16. FREQUENCY RESPONSE FOR VARIOUS  $C_L$ 

FIGURE 17. CLOSED LOOP OUTPUT IMPEDANCE

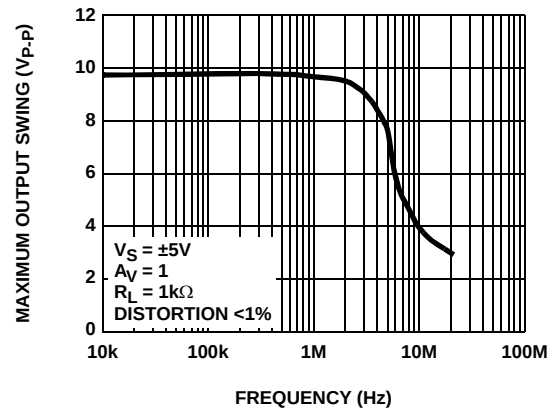


FIGURE 18. MAXIMUM OUTPUT SWING vs FREQUENCY

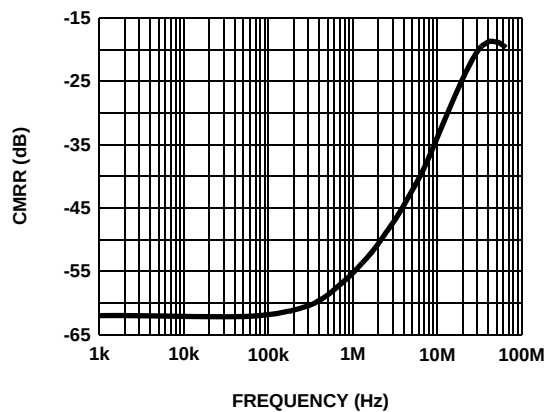


FIGURE 19. CMRR

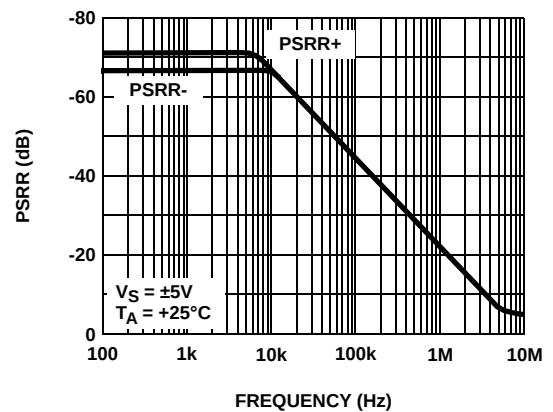


FIGURE 20. PSRR

Typical Performance Curves (Continued)

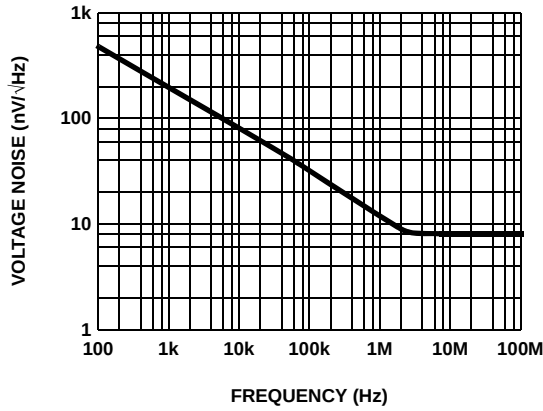


FIGURE 21. INPUT VOLTAGE NOISE SPECTRAL DENSITY

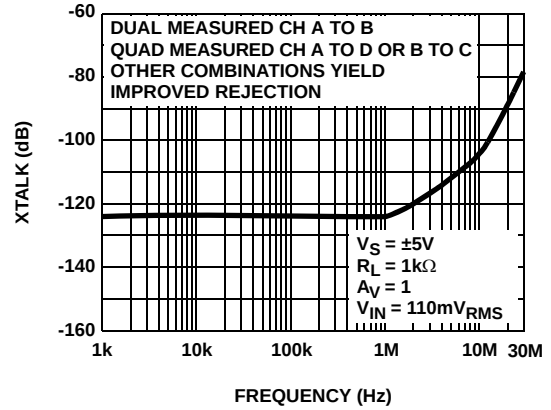


FIGURE 22. CHANNEL SEPARATION

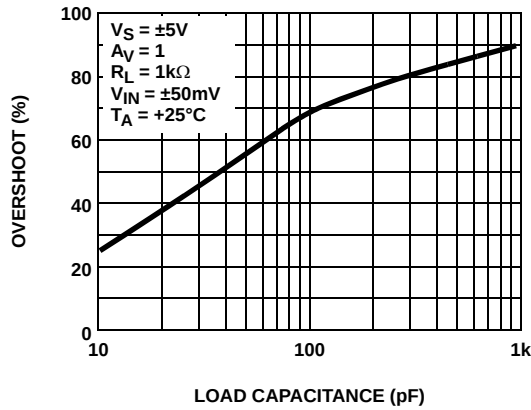


FIGURE 23. SMALL-SIGNAL OVERSHOOT vs LOAD CAPACITANCE

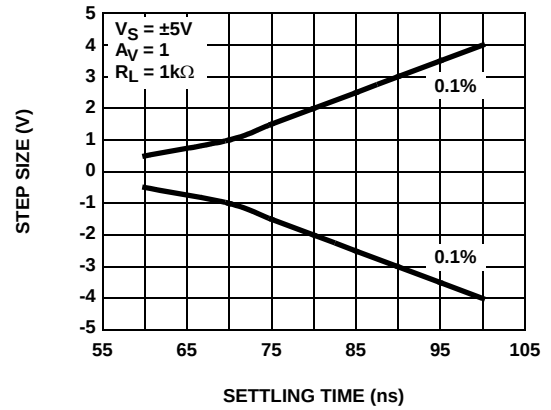


FIGURE 24. SETTLING TIME vs STEP SIZE

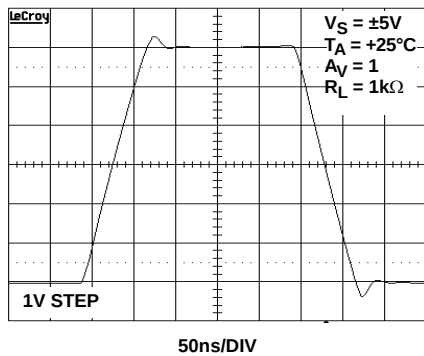


FIGURE 25. LARGE SIGNAL TRANSIENT RESPONSE

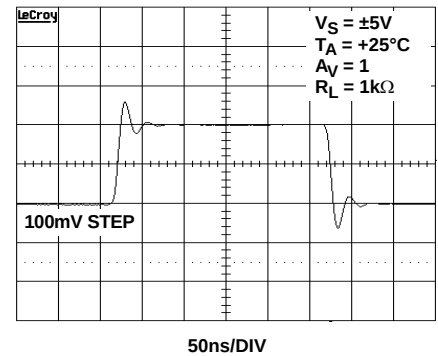




FIGURE 26. SMALL SIGNAL TRANSIENT RESPONSE

## Pin Descriptions

| PIN NUMBER | PIN NAME | FUNCTION                        | EQUIVALENT CIRCUIT                                                                                   |
|------------|----------|---------------------------------|------------------------------------------------------------------------------------------------------|
| 1          | VOUTA    | Amplifier A output              |  <p>CIRCUIT 1</p> |
| 2          | VINA-    | Amplifier A inverting input     |  <p>CIRCUIT 2</p> |
| 3          | VINA+    | Amplifier A non-inverting input | (Reference Circuit 2)                                                                                |
| 4          | VS-      | Negative power supply           |                                                                                                      |
| 5          | VINB+    | Amplifier B non-inverting input | (Reference Circuit 2)                                                                                |
| 6          | VINB-    | Amplifier B inverting input     | (Reference Circuit 2)                                                                                |
| 7          | VOUTB    | Amplifier B output              | (Reference Circuit 1)                                                                                |
| 8          | VS+      | Positive power supply           |                                                                                                      |

## Applications Information

### Product Description

The EL5211A voltage feedback amplifier is fabricated using a high voltage CMOS process. It exhibits rail-to-rail input and output capability, is unity gain stable, and has low power consumption (2.5mA per amplifier). These features make the EL5211A ideal for a wide range of general-purpose applications. Connected in voltage follower mode and driving a load of 1k $\Omega$ , the EL5211A has a -3dB bandwidth of 60MHz while maintaining a 75V/ $\mu$ s slew rate. The EL5211A is a dual amplifier.

### Operating Voltage, Input, and Output

The EL5211A is specified with a single nominal supply voltage from 5V to 15V or a split supply with its total range from 5V to 15V. Correct operation is guaranteed for a supply range of 4.5V to 16.5V. Most EL5211A specifications are stable over both the full supply range and operating temperatures of -40°C to +85°C. Parameter variations with operating voltage and/or temperature are shown in the "Typical Performance Curves" on page 4.

The input common-mode voltage range of the EL5211A extends 500mV beyond the supply rails. The output swings of the EL5211A typically extend to within 100mV of positive and negative supply rails with load currents of 5mA. Decreasing load currents will extend the output voltage

range even closer to the supply rails. Figure 27 shows the input and output waveforms for the device in the unity-gain configuration. Operation is from  $\pm$ 5V supply with a 1k $\Omega$  load connected to GND. The input is a 10V<sub>P-P</sub> sinusoid. The output voltage is approximately 9.8V<sub>P-P</sub>.

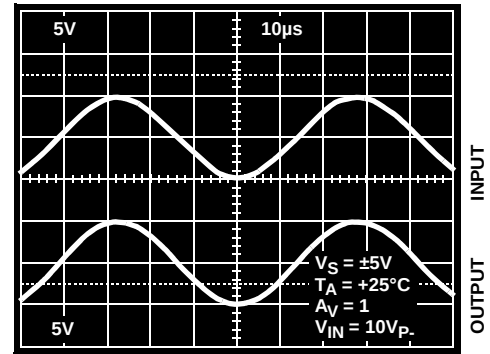


FIGURE 27. OPERATION WITH RAIL-TO-RAIL INPUT AND OUTPUT

### Short Circuit Current Limit

The EL5211A will limit the short circuit current to  $\pm$ 110mA if the output is directly shorted to the positive or the negative supply. If an output is shorted indefinitely, the power dissipation could easily increase such that the device may be damaged. Maximum reliability is maintained if the output continuous current never exceeds  $\pm$ 65mA. This limit is set by the design of the internal metal interconnects.

## Output Phase Reversal

The EL5211A is immune to phase reversal as long as the input voltage is limited from  $V_S^- - 0.5V$  to  $V_S^+ + 0.5V$ . Figure 28 shows a photo of the output of the device with the input voltage driven beyond the supply rails. Although the device's output will not change phase, the input's overvoltage should be avoided. If an input voltage exceeds supply voltage by more than 0.6V, electrostatic protection diodes placed in the input stage of the device begin to conduct and overvoltage damage could occur.

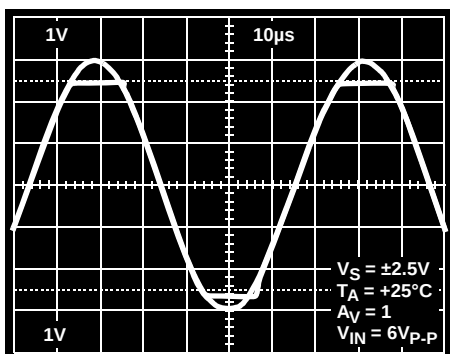


FIGURE 28. OPERATION WITH BEYOND-THE-RAILS INPUT

## Power Dissipation

With the high-output drive capability of the EL5211A amplifier, it is possible to exceed the +125°C absolute maximum junction temperature under certain load current conditions. Therefore, it is important to calculate the maximum junction temperature for the application to determine if load conditions need to be modified for the amplifier to remain in the safe operating area.

The maximum power dissipation allowed in a package is determined according to:

$$P_{DMAX} = \frac{T_{JMAX} - T_{AMAX}}{\theta_{JA}} \quad (\text{EQ. 1})$$

where:

- $T_{JMAX}$  = Maximum junction temperature
- $T_{AMAX}$  = Maximum ambient temperature
- $\theta_{JA}$  = Thermal resistance of the package
- $P_{DMAX}$  = Maximum power dissipation in the package

The maximum power dissipation actually produced by an IC is the total quiescent supply current times the total power supply voltage, plus the power in the IC due to the loads, or:

$$P_{DMAX} = \sum i[V_S \times I_{SMAX} + (V_S^+ - V_{OUTi}) \times I_{LOADi}] \quad (\text{EQ. 2})$$

when sourcing, and:

$$P_{DMAX} = \sum i[V_S \times I_{SMAX} + (V_{OUTi} - V_S^-) \times I_{LOADi}] \quad (\text{EQ. 3})$$

when sinking,

where:

- $i = 1$  to 2 for dual and 1 to 4 for quad
- $V_S$  = Total supply voltage
- $I_{SMAX}$  = Maximum supply current per amplifier
- $V_{OUTi}$  = Maximum output voltage of the application
- $I_{LOADi}$  = Load current

If we set the two  $P_{DMAX}$  equations equal to each other, we can solve for  $R_{LOADi}$  to avoid device overheat. Figures 29 and 30 provide a convenient way to see if the device will overheat. The maximum safe power dissipation can be found graphically, based on the package type and the ambient temperature. By using the Equation 3, it is a simple matter to see if  $P_{DMAX}$  exceeds the device's power derating curves. To ensure proper operation, it is important to observe the recommended derating curves shown in Figures 29 and 30.

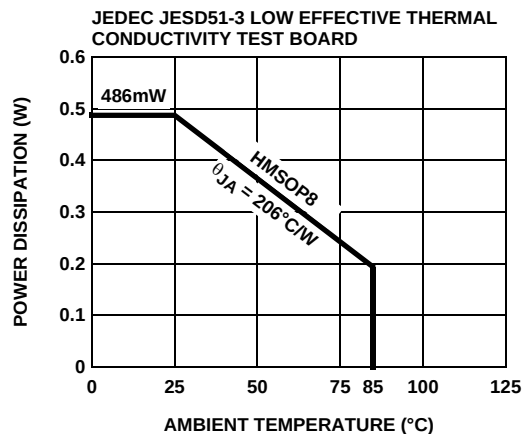


FIGURE 29. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE

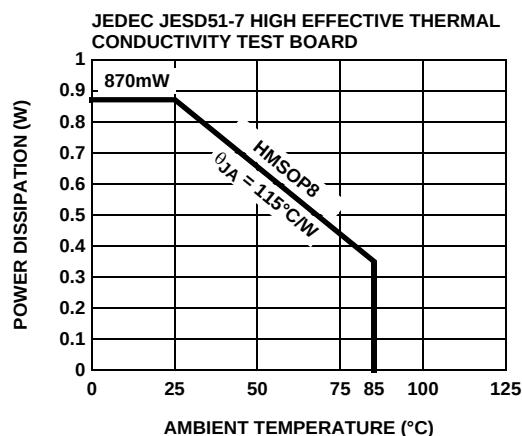







FIGURE 30. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE

**Unused Amplifiers**

It is recommended that any unused amplifiers in a dual and a quad package be configured as a unity gain follower. The inverting input should be directly connected to the output and the non-inverting input tied to the ground plane.

**Power Supply Bypassing and Printed Circuit Board Layout**

The EL5211A can provide gain at high frequency. As with any high-frequency device, good printed circuit board layout is necessary for optimum performance. Ground plane construction is highly recommended, lead lengths should be as short as possible and the power supply pins must be well bypassed to reduce the risk of oscillation. For normal single supply operation, where the  $V_{S-}$  pin is connected to ground, a 0.1 $\mu$ F ceramic capacitor should be placed from  $V_{S+}$  to pin to  $V_{S-}$  pin. A 4.7 $\mu$ F tantalum capacitor should then be connected in parallel, placed in the region of the amplifier. One 4.7 $\mu$ F capacitor may be used for multiple devices. This same capacitor combination should be placed at each supply pin to ground if split supplies are to be used.

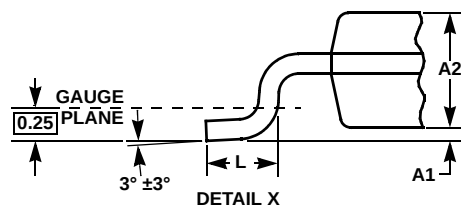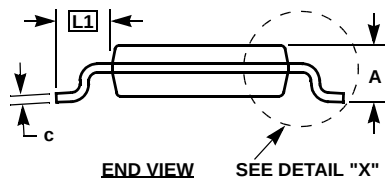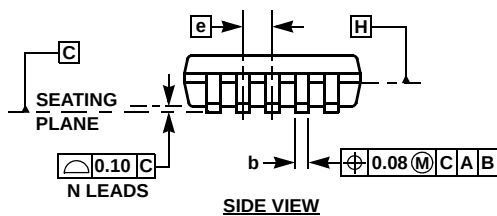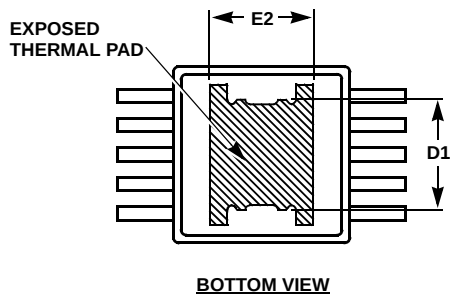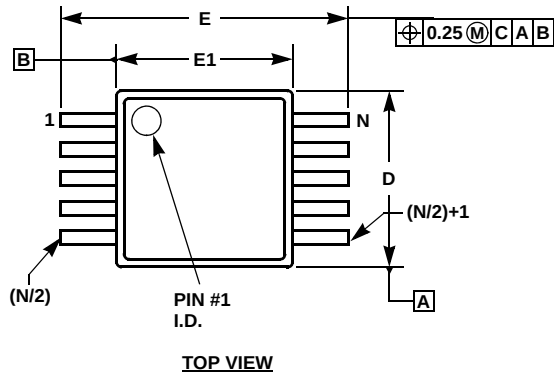**HMSOP (Heat-Sink MSOP) Package Family****MDP0050****HMSOP (HEAT-SINK MSOP) PACKAGE FAMILY**

| SYMBOL | MILLIMETERS |         | TOLERANCE     | NOTES |
|--------|-------------|---------|---------------|-------|
|        | HMSOP8      | HMSOP10 |               |       |
| A      | 1.00        | 1.00    | Max.          | -     |
| A1     | 0.075       | 0.075   | +0.025/-0.050 | -     |
| A2     | 0.86        | 0.86    | ±0.09         | -     |
| b      | 0.30        | 0.20    | +0.07/-0.08   | -     |
| c      | 0.15        | 0.15    | ±0.05         | -     |
| D      | 3.00        | 3.00    | ±0.10         | 1, 3  |
| D1     | 1.85        | 1.85    | Reference     | -     |
| E      | 4.90        | 4.90    | ±0.15         | -     |
| E1     | 3.00        | 3.00    | ±0.10         | 2, 3  |
| E2     | 1.73        | 1.73    | Reference     | -     |
| e      | 0.65        | 0.50    | Basic         | -     |
| L      | 0.55        | 0.55    | ±0.15         | -     |
| L1     | 0.95        | 0.95    | Basic         | -     |
| N      | 8           | 10      | Reference     | -     |

Rev. 1 2/07

**NOTES:**

1. Plastic or metal protrusions of 0.15mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25mm maximum per side are not included.
3. Dimensions "D" and "E1" are measured at Datum Plane "H".
4. Dimensioning and tolerancing per ASME Y14.5M-1994.

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.

Intersil Corporation's quality certifications can be viewed at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)