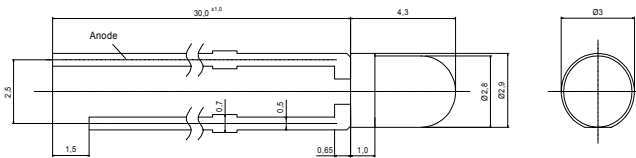


Radiation	Type	Technology	Case
Infrared	Water clear	InGaAs/InP	3 mm plastic lens

	Description High-power, high-speed infrared LED in standard 3 mm housing, small package allows compact design, housing without standoff leads Note: Special packages with standoff available on request
	Applications Optical communications, optical switches, optical sensors, medical applications, safety equipment

Maximum Ratings

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Forward current (DC)		I_F	100	mA
Peak forward current	$(t_p \leq 10 \mu\text{s}, T = 10\text{ms})$	I_{FM}	200	mA
Operating temperature range		T_{amb}	-20 to +85	$^{\circ}\text{C}$
Storage temperature range		T_{stg}	-55 to +100	$^{\circ}\text{C}$
Soldering temperature	$t \leq 5 \text{ s}, 3 \text{ mm from case}$	T_{sd}	260	$^{\circ}\text{C}$

Optical and Electrical Characteristics

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

Parameter	Test conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 20 \text{ mA}$	V_F		0.65	0.85	V
Forward voltage*	$I_F = 100 \text{ mA}$	V_F		0.8	1.1	V
Reverse voltage	$I_R = 100 \mu\text{A}$	V_F		5		V
Radiant power	$I_F = 20 \text{ mA}$	Φ_e	1.2	1.6		mW
Radiant power*	$I_F = 100 \text{ mA}$	Φ_e	4.5	5.5		mW
Radiant intensity	$I_F = 20 \text{ mA}$	I_e	2.2	2.8		mW/sr
Radiant intensity*	$I_F = 100 \text{ mA}$	I_e	8	10		mW/sr
Peak wavelength	$I_F = 20 \text{ mA}$	λ_p	1530	1550	1570	nm
Spectral bandwidth at 50%	$I_F = 20 \text{ mA}$	$\Delta\lambda_{0.5}$		110		nm
Viewing angle	$I_F = 20 \text{ mA}$	φ		55		deg.
Switching time	$I_F = 20 \text{ mA}$	t_r, t_f		10		ns

*measured after 30s current flow





Note: All measurements carried out on *EPIGAP* equipment

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

EPIGAP Optoelektronik GmbH, D-12555 Berlin, Köpenicker Str.325 b, Haus 201

Tel.: +49-30-6576 2543, Fax : +49-30-6576 2545

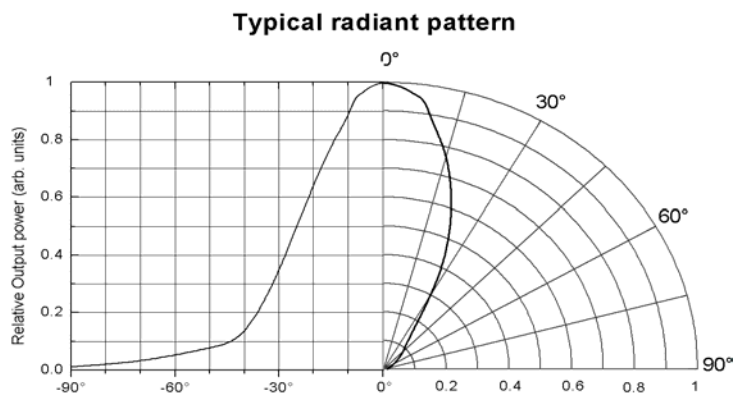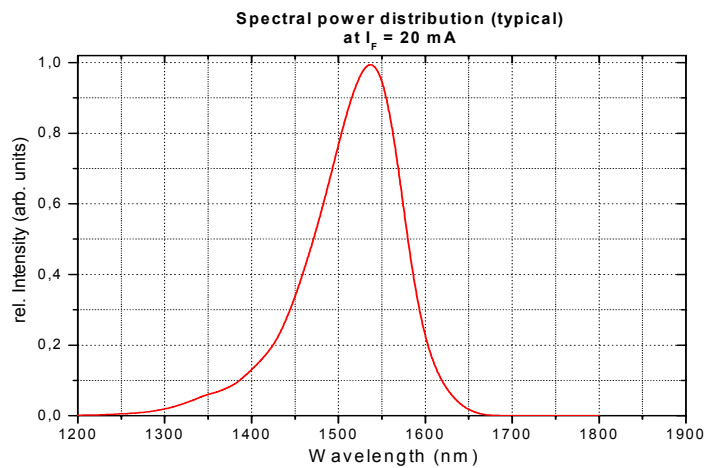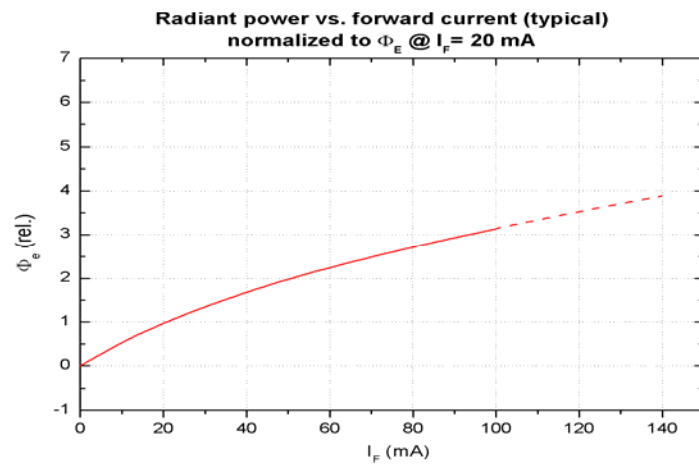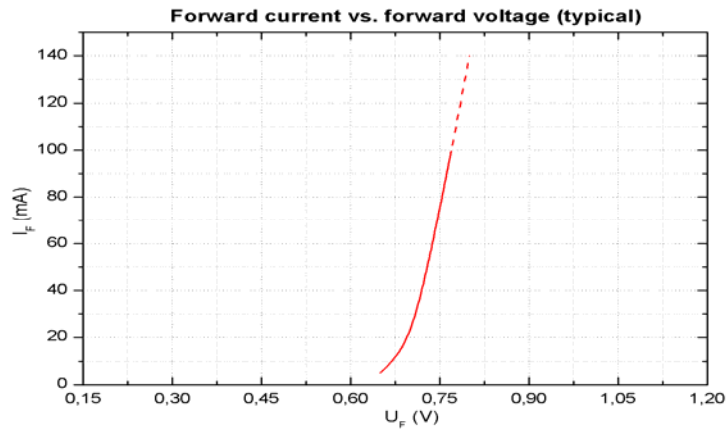

We reserve the right to make changes to improve technical design and may do so without further notice.
Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

Remarks concerning optical radiation safety*

Up to maximum forward current, at continuous operation, this LED may be classified as LED product *Class 1*, according to standard IEC 60825-1:A2. *Class 1* products are safe to eyes and skin under reasonably predictable conditions. This implicates a direct observation of the light beam by means of optical instruments.

*Note: Safety classification of an optical component mainly depends on the intended application and the way the component is being used. Furthermore, all statements made to classification are based on calculations and are only valid for this LED "as it is", and at continuous operation. Using pulsed current or altering the light beam with additional optics may lead to different safety classifications. Therefore these remarks should be taken as recommendation and guideline only.

