Single N-channel MOSFET

ELM14440AA-N

■General description

ELM14440AA-N uses advanced trench technology to provide excellent Rds(on), low gate charge and low gate resistance.

■Features

- Vds=60V
- Id=5A (Vgs=10V)
- Rds(on) < 55mΩ (Vgs=10V)
- Rds(on) < 75mΩ (Vgs=4.5V)

■Maximum absolute ratings

Ta=25°C. Unless otherwise noted.

Parameter		Symbol	Limit	Unit	Note
Drain-source voltage		Vds	60	V	
Gate-source voltage		Vgs	±20	V	
Continuous drain current	Ta=25°C	Id	5	A	1
	Ta=70°C		4		
Pulsed drain current		Idm	20	A	2
Power dissipation	Tc=25°C	Pd	2.5	W	
	Tc=70°C		1.6		
Junction and storage temperature range		Tj, Tstg	-55 to 150	°C	

■Thermal characteristics

Parameter		Symbol	Typ.	Max.	Unit	Note
Maximum junction-to-ambient	t≤10s	Rθja	38	50	°C/W	1
Maximum junction-to-ambient	Steady-state		69	80	°C/W	
Maximum junction-to-lead	Steady-state	Rθjl	24	30	°C/W	3

■Pin configuration

SOP-8(TOP VIEW)



Pin No.	Pin name
1	SOURCE
2	SOURCE
3	SOURCE
4	GATE
5	DRAIN
6	DRAIN
7	DRAIN
8	DRAIN

■Circuit



■Electrical characteristics

Ta=25°C. Unless otherwise noted.

Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit
STATIC PARAMETERS							
Drain-source breakdown voltage	BVdss	Id=250μA, Vgs=0V		60			V
Zero gate voltage drain current	Idss	Vds=48V Vgs=0V				1	μA
			Ta=55°C			5	
Gate-body leakage current	Igss	Vds=0V, Vgs=±20V				100	nA
Gate threshold voltage	Vgs(th)	Vds=Vgs, Id=250μA		1.0	2.3	3.0	V
On state drain current	Id(on)	Vgs=10V, Vds=5V		20			A
Static drain-source on-resistance	Rds(on)	Vgs=10V Id=5A			42	55	mΩ
			Ta=125°C		75		
		Vgs=4.5V, Id=4A			54	75	mΩ
Forward transconductance	Gfs	Vds=5V, Id=5A			11		S
Diode forward voltage	Vsd	Is=1A, Vgs=0V			0.78	1.00	V
Max. body-diode continuous current	Is					4	A
DYNAMIC PARAMETERS							
Input capacitance	Ciss	Vgs=0V, Vds=30V, f=1MHz			450	540	pF
Output capacitance	Coss				60		pF
Reverse transfer capacitance	Crss				25		pF
Gate resistance	Rg	Vgs=0V, Vds=0V, f=1MHz			1.65	2.00	Ω
SWITCHING PARAMETERS							
Total gate charge (10V)	Qg	Vgs=10V, Vds=30V, Id=5A			8.5	10.5	nC
Total gate charge (4.5V)	Qg				4.3	5.5	nC
Gate-source charge	Qgs				1.6		nC
Gate-drain charge	Qgd				2.2		nC
Turn-on delay time	td(on)	Vgs=10V, Vds=30V RL=6Ω, Rgen=3Ω			5.1	7.0	ns
Turn-on rise time	tr				2.6	4.0	ns
Turn-off delay time	td(off)				15.9	20.0	ns
Turn-off fall time	tf				2.0	3.0	ns
Body diode reverse recovery time	trr	If=5A, dIf/dt=100A/μs			25.1	35.0	ns
Body diode reverse recovery charge	Qrr	If=5A, dIf/dt=100A/μs			28.7		nC

NOTE :

1. The value of Rθja is measured with the device mounted on 1in² FR-4 board of 2oz. Copper, in still air environment with Ta=25°C. The value in any given applications depends on the user's specific board design, The current rating is based on the t ≤ 10s themal resistance rating.
2. Repetitive rating, pulse width limited by junction temperature.
3. The Rθja is the sum of the thermal impedance from junction to lead Rθjl and lead to ambient.
4. The static characteristics in Figures 1 to 6 are obtained using 80μs pulses, duty cycle 0.5%max.
5. These tests are performed with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with Ta=25°C. The SOA curve provides a single pulse rating.

■Typical electrical and thermal characteristics

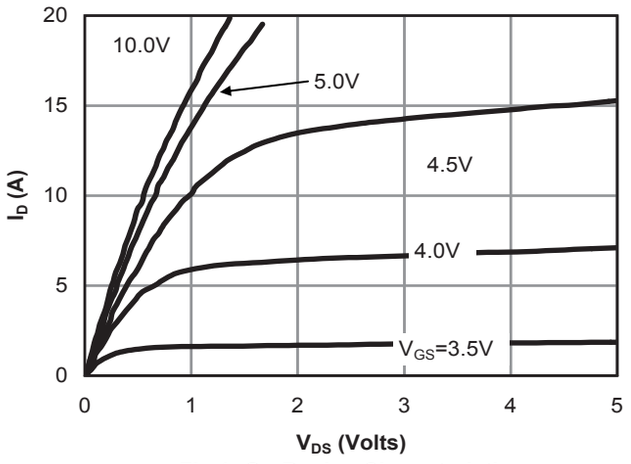

Fig 1: On-Region Characteristics

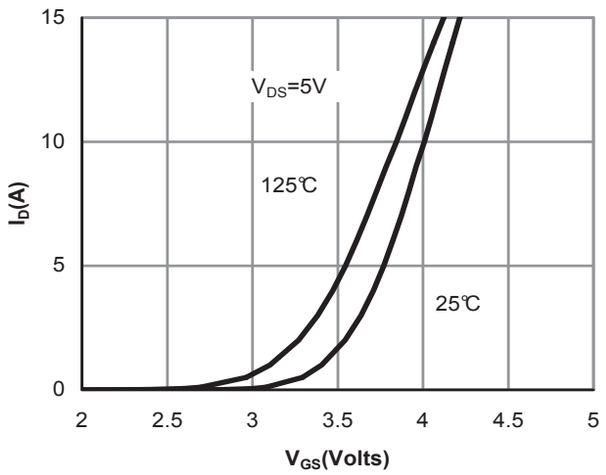

Figure 2: Transfer Characteristics

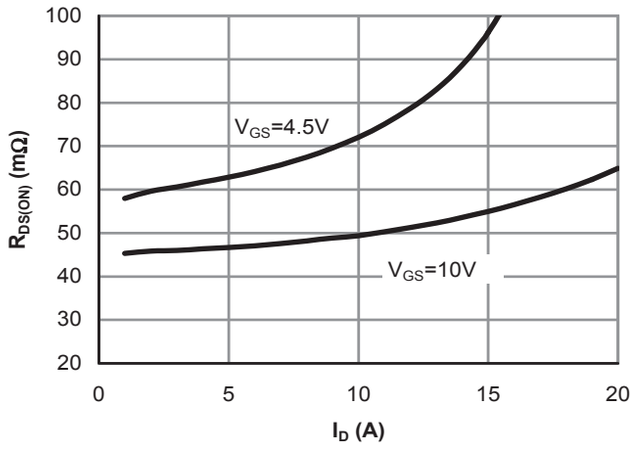

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

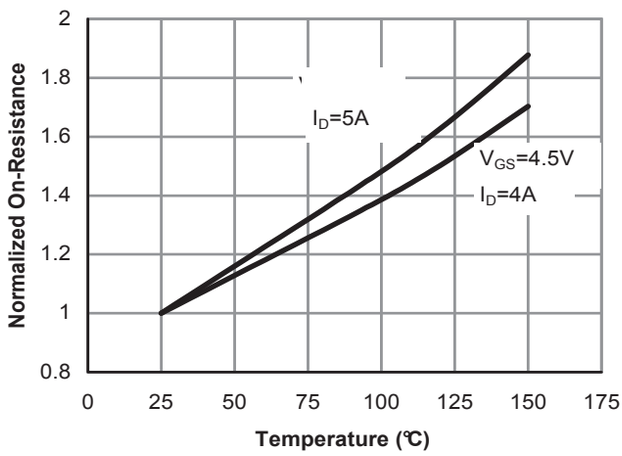

Figure 4: On-Resistance vs. Junction Temperature

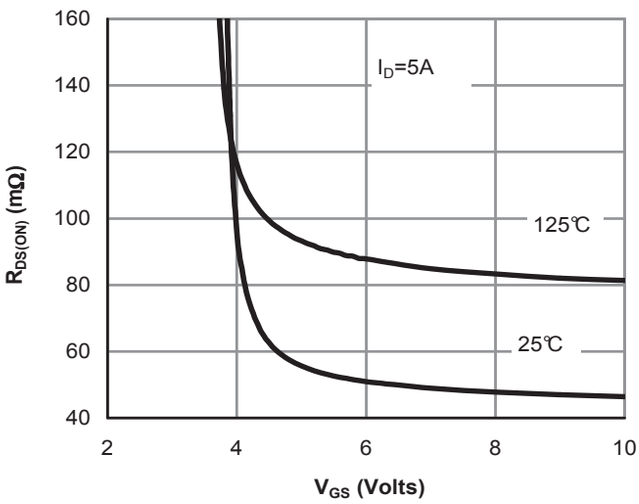

Figure 5: On-Resistance vs. Gate-Source Voltage

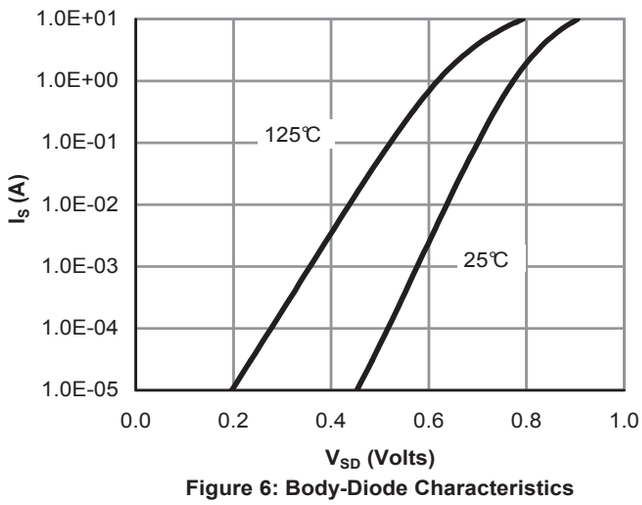

Figure 6: Body-Diode Characteristics

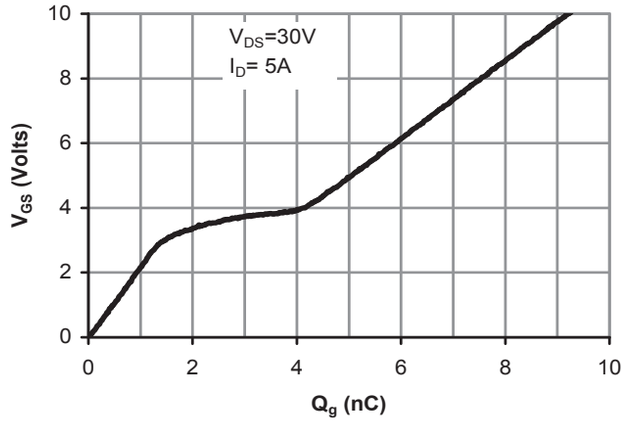

Figure 7: Gate-Charge Characteristics

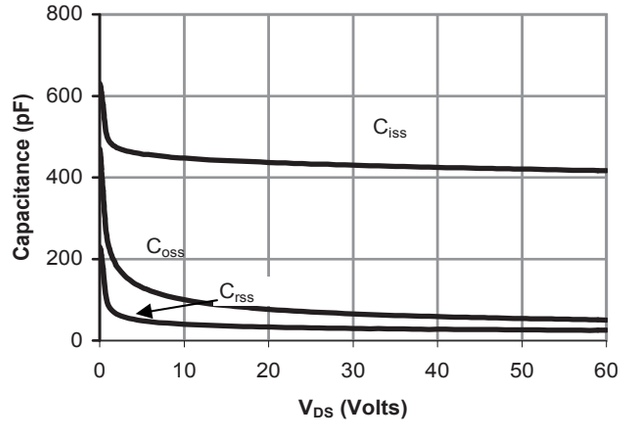

Figure 8: Capacitance Characteristics

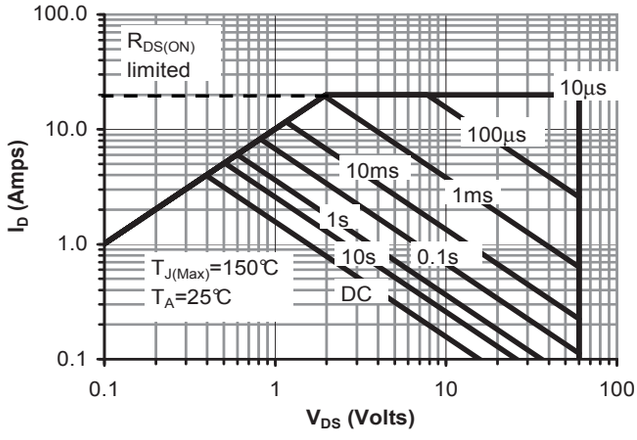

Figure 9: Maximum Forward Biased Safe Operating Area (Note 5)

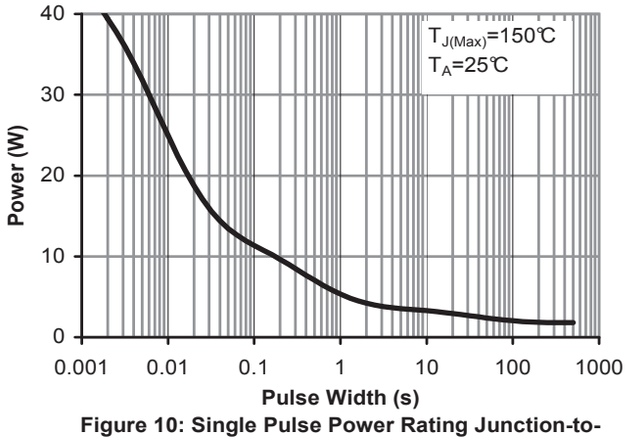

Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note 5)

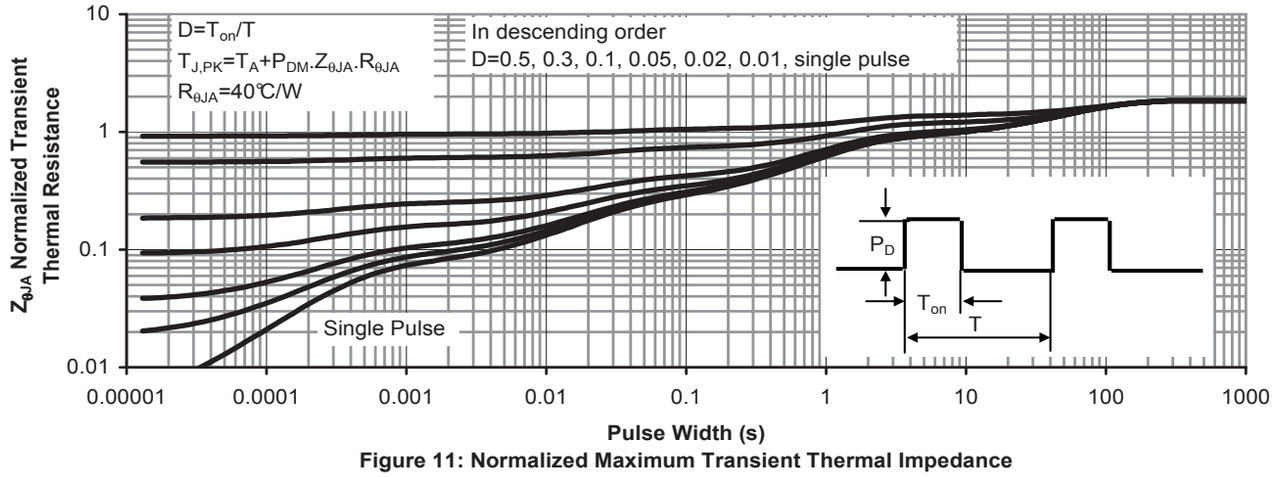

Figure 11: Normalized Maximum Transient Thermal Impedance